

# Tube test data for Hickock

**532**

**533**

**534**

**600**

## series Tube tester



Reworked by  
PAØPGA

This manual was downloaded from BAMA's  
boatanchor site <http://bama.sbc.edu>



**Model 532-533-533DM-534**  
Code No. 3200-44

**STOP**

THE HICKOK ELECTRICAL INSTRUMENT COMPANY—CLEVELAND, OHIO

Copyright 1961

0A4G	OFF KS-0581-0	100	85	P5*	---	Short-circuit 1-2 Hold dilution down for 5 seconds. Plate No. 1
0Y4	BLST JX-3502-0	0	40	P2*	---	Hold button down for 5 seconds. Plate No. 2
0Z4	---	JR-0507-0	0	75	P2*	---
0Z4	---	JR-0307-0	0	75	P2*	---
1A3	1.5 HT-0201-0	0	0	P1*	800	PENT. SECT. OR OVER 200 SCALE
1A5	1.5 JR-5340-0	43	39	P4	---	OR OVER 200 SCALE
1A7G	1.5 JR-5340-0	30	73	P4	---	OR OVER 200 SCALE
1A7G	1.5 JR-5843-0	46	73	P4	---	OR OVER 200 SCALE
1A05	1.1 EV-2780-0	44	0	P4	---	OR OVER 200 SCALE
1AD4	1.1 DV-4120-0	28	62	P4	1400	OR OVER 200 SCALE
1AD5	1.1 EV-3780-0	28	16	P4	600	OR OVER 200 SCALE
1AE4	1.1 DX-6210-0	22	47	P4	980	OR OVER 200 SCALE
1AF4	1.5 DX-6210-0	21	27	P4	700	OR OVER 200 SCALE
1AF5	1.5 DX-6580-0	16	15	P4	600	OR OVER 200 SCALE
1AF5	1.5 DX-0100-0	0	0	P1*	---	OR OVER 200 SCALE
1AG4	1.1 DV-4120-0	54	20	P4	650	OR OVER 200 SCALE
1AG5	1.1 EW-5120-3	40	0	P5*	---	OR OVER 200 SCALE
1AG5	1.1 EW-0300-0	0	0	P1*	---	OR OVER 200 SCALE
1AH4	1.1 FT-4120-0	33	0	P5*	---	OR OVER 200 SCALE
1AJ5	1.1 EW-5120-3	37	73	P4	426	OR OVER 200 SCALE
1AJ5	1.1 EW-0300-0	0	0	P1*	---	OR OVER 200 SCALE
1AK4	1.1 FT-4120-0	33	0	P5*	---	OR OVER 200 SCALE
1AK5	1.1 EW-5120-3	40	0	P5*	---	OR OVER 200 SCALE
1AK5	1.1 EW-0300-0	0	0	P1*	---	OR OVER 200 SCALE
1AU3	1.1 JR-0000-0	0	0	P5*	---	OR OVER 200 SCALE
1AX2	1.5 BS-0000-0	0	15	P5*	---	OR OVER 200 SCALE
1B3/8016	1.1 JR-0000-0	0	60	P5*	---	OR OVER 200 SCALE
1B4	2.0 JR-0230-0	35	22	P4	640	OR OVER 200 SCALE
1C3	1.5 DX-8200-0	37	33	P4	760	OR OVER 200 SCALE
1C5	1.5 JR-5340-0	44	67	P4	1850	OR OVER 200 SCALE
1C21	BLST JP-8501-0	0	83	P5*	---	OR OVER 200 SCALE
1D5	2.0 JR-0340-0	29	33	P4	760	OR OVER 200 SCALE
1DN5	1.5 DX-6210-0	32	15	P4	600	OR OVER 200 SCALE
1DN5	1.5 HT-0800-0	0	0	P1*	3000	OR OVER 200 SCALE
1E3	1.1 EV-1800-0	24	81	P4	---	OR OVER 200 SCALE
1G3	1.1 JR-0000-0	0	60	P5*	---	OR OVER 200 SCALE
1H2	1.4 BS-0000-0	0	60	P5*	---	OR OVER 200 SCALE
1H5	1.5 JR-0300-0	16	73	P4	275	OR OVER 200 SCALE
1H5	1.5 JR-0800-0	16	0	P1*	---	OR OVER 200 SCALE
1H6	2.0 JR-6300-0	28	73	P4	475	OR OVER 200 SCALE

**534A-534B-600 Tube Tester**  
3-1-61

**STOP**

NOTE: A Star \* after P1, P2, P3, and P5 indicates that reading is made on English Scale only.

NOTE: A crosshatch in the BIAS column indicates Bias should be set at 100 and proper button pressed while Bias Dial is rotated until tube strikes.

12A8	12.5 JR-0347-5	22	50	P4	1000	Pent. Sect. Cap=G
12A8	12.6 JR-5647-3	37	73	P4	300	OR OVER 200 SCALE
12AB5	12.6 EV-3917-0	21	85	P4	3700	OR OVER 200 SCALE
12AC6	12.6 JR-2657-3	30	0	P1*	---	OR OVER 200 SCALE
12AD6	12.6 JR-7652-3	30	0	P1*	---	OR OVER 200 SCALE
12AD7	12.6 EV-7608-0	12	58	P4	1250	OR OVER 200 SCALE
12AD7	12.6 EV-2103-0	12	58	P4	1250	OR OVER 200 SCALE
12AE6	12.6 JR-0702-3	0	0	P1*	---	OR OVER 200 SCALE
12AE6	12.6 JR-0602-0	0	0	P1*	---	OR OVER 200 SCALE
12AE6	12.6 JR-0602-0	0	0	P1*	---	OR OVER 200 SCALE
12AE7	12.6 EV-0608-7	0	30	P1*	---	OR OVER 200 SCALE
12AE7	12.6 EV-0103-2	0	40	P1*	---	OR OVER 200 SCALE
12AF3	12.6 EV-0002-0	0	65	P3*	---	OR OVER 200 SCALE
12AF6	12.6 JR-3667-2	41	55	P4	1150	OR OVER 200 SCALE
12AG6	12.6 JR-7652-3	30	30	P1*	---	OR OVER 200 SCALE
12AH7	12.6 JX-5604-3	20	73	P4	2000	OR OVER 200 SCALE
12AH7	12.6 JX-2301-6	20	73	P4	2000	OR OVER 200 SCALE
12AJ6	12.6 JR-0702-3	0	0	P1*	---	OR OVER 200 SCALE
12AJ6	12.6 JR-0602-0	0	0	P1*	---	OR OVER 200 SCALE
12AJ6	12.6 JR-0502-0	0	0	P1*	---	OR OVER 200 SCALE
12AL5	12.6 JR-0703-0	0	61	P1*	---	OR OVER 200 SCALE
12AL5	12.6 JR-0205-0	0	61	P1*	---	OR OVER 200 SCALE
12AL8	12.6 EV-0367-2	0	57	P1*	---	OR OVER 200 SCALE
12AL8	12.6 EV-0109-8	0	0	P1*	---	OR OVER 200 SCALE
12AQ5	12.6 JR-3562-0	21	85	P4	3700	OR OVER 200 SCALE
12AS5	12.6 JR-2763-0	26	89	P4	5600	OR OVER 200 SCALE
12AT6	12.6 JR-3702-0	11	56	P4	1200	OR OVER 200 SCALE
12AT6	12.6 JR-3602-0	11	0	P1*	---	OR OVER 200 SCALE
12AT6	12.6 JR-3502-0	11	0	P1*	---	OR OVER 200 SCALE
12AT7	12.6 EV-7608-0	10	86	P4	4000	OR OVER 200 SCALE
12AT7	12.6 EV-2103-0	16	76	P4	4000	OR OVER 200 SCALE
12AU6	12.6 JR-3567-2	16	76	P4	2300	OR OVER 200 SCALE
12AU7	12.6 EV-7608-0	24	75	P4	2200	OR OVER 200 SCALE
12AU7	12.6 EV-2103-0	24	76	P4	2200	OR OVER 200 SCALE
12AV5	12.6 JR-2573-0	50	86	P4	3900	OR OVER 200 SCALE
12AV6	12.6 JR-3702-6	12	58	P4	1250	OR OVER 200 SCALE
12AV6	12.6 JR-3602-5	0	0	P1*	---	OR OVER 200 SCALE
12AV6	12.6 JR-3502-6	0	0	P1*	---	OR OVER 200 SCALE
12AV7	12.6 EV-2103-7	30	69	P4	1640	OR OVER 200 SCALE
12AV7	12.6 EV-7608-2	30	69	P4	1640	OR OVER 200 SCALE
12AV8	12.6 JR-3562-7	0	82	P4	3000	OR OVER 200 SCALE
12AV8	12.6 JR-3562-7	0	82	P4	3000	OR OVER 200 SCALE



Part No.	Part Description	QTY	Notes	Part No.	Part Description	QTY	Notes
1H5	1.5 JR-0500-0	16	0	P1*	12AV7	12.6 EV-7608-2	30
1H6	2.0 JR-6300-0	28	73	P4	12AW6	12.6 JR-3562-7	0
1H6	2.0 JR-6500-0	28	0	P1*	12AX4	12.6 JX-0503-0	0
1H6	2.0 JR-6400-0	28	0	P1*	12AX7	12.6 EV-7608-0	12
1J3	1.1 JR-0000-0	0	0	P5*	12AY7	12.6 EV-2103-0	15
1K3	1.1 JR-0000-0	0	0	P5*	12AY7	12.6 EV-7608-0	15
1L4	1.5 HT-6210-0	19	92	P4	12AZ7	12.6 EV-2103-0	10
1L6	1.5 DX-6251-8	18	39	P4	12B4	12.6 EV-7608-0	10
1LA4	1.5 JR-6230-0	43	39	P4	12B7	12.6 EV-2901-0	52
1LA6	1.5 JR-6253-4	24	39	P4	12B7	12.6 JR-6237-4	22
1LA6	1.5 JR-4352-6	46	73	P4	12BA6	12.6 JR-3567-2	9
1LB4	1.5 JR-6230-0	51	44	P4	12BA7	12.6 EV-7913-2	17
1LB6	1.5 JR-6243-7	0	0	P4	12BD6	12.6 EV-2913-7	25
1LB6	1.5 JR-6357-4	20	65	P4	12BE6	12.6 JR-3567-2	18
1LC5	1.5 JR-6234-0	29	37	P4	12BE6	12.6 JR-7552-3	11
1LC6	1.5 JR-6253-4	30	25	P4	12BF6	12.6 JR-3592-7	0
1LC6	1.5 JR-4352-6	30	73	P4	12BF6	12.6 JR-3702-0	14
1LD5	1.5 JR-6230-0	28	17	P4	12BF6	12.6 JR-3602-0	0
1LD6	1.5 JR-6430-0	28	0	P1*	12BH7	12.6 EV-7608-2	29
1LE3	1.5 JR-6205-0	0	61	P4	12BH7	12.6 EV-2103-7	29
1LF3	1.5 JR-6205-0	20	67	P4	12BK5	12.6 EV-3186-0	0
1LG5	1.5 JR-6234-0	25	58	P4	12BK5	12.6 JR-3702-5	6
1LH4	1.5 JR-6200-0	16	73	P4	12BK6	12.6 JR-0602-5	0
1LH4	1.5 JR-6400-0	16	0	P1*	12BK6	12.6 JR-0502-7	0
1LN5	1.5 JR-6234-0	11	34	P4	12BL6	12.6 JR-2657-3	30
1N2	1.1 JR-0000-0	0	60	P5*	12BN6	12.6 JR-2763-6	0
1N5	1.5 JR-0340-0	11	34	P4	12BN6	12.6 JR-6763-2	0
1Q5	1.5 JR-5340-0	37	74	P4	12BQ6	12.6 JR-5047-0	50
1Q6	1.1 EV-2780-0	36	73	P4	12BR7	12.6 EV-2103-0	10
1Q6	1.1 EV-0600-0	0	0	P1*	12BR7	12.6 EV-0708-0	0
1R5	1.5 DX-8106-2	60	42	P4	12BR7	12.6 EV-0608-0	0
1S2A	1.5 ES-0000-0	0	72	P5*	12BT6	12.6 EV-0608-0	0
184	1.5 DX-1280-0	43	65	P4	12BT6	12.6 JR-3702-0	13
185	1.5 DX-6580-0	34	11	P4	12BT6	12.6 JR-3602-0	0
185	1.5 DX-0180-0	34	0	P1*	12BU6	12.6 JR-3702-0	34
1S6	1.1 EV-3180-0	35	73	P4	12BU6	12.6 JR-3602-0	0
1S6	1.1 EV-0600-0	0	0	P1*	12BU6	12.6 EV-3502-0	0
1T4	1.5 DX-6210-0	34	34	P4	12BV7	12.6 EV-2781-3	13
1T6	1.1 EV-3186-0	23	73	P4	12BW4	12.6 EV-0709-1	0
1T6	1.1 EV-0600-0	0	0	P1*	12BY7	12.6 EV-0109-7	0
1U4	1.5 DX-6210-0	14	43	P4	12BZ6	12.6 EV-2781-3	13
1U5	1.5 DX-6210-0	34	11	P4	12BZ7	12.6 JR-3562-7	20
1U5	1.5 DX-6810-0	34	0	P1*	12BZ7	12.6 EV-7608-0	24
1U6	1.5 DX-6251-8	25	48	P4	12C5	12.6 EV-2103-0	23
1U6	1.5 DX-8156-2	5	0	P4	12C8	12.6 JR-0367-2	24
1V	8.3 JR-0203-0	0	49	P3*	12C8	12.6 JR-0507-3	24
1V2	0.6 EV-0900-0	0	12	P5*	12C8	12.6 JR-0407-3	24
1V5	1.1 EV-2780-0	44	0	P4	12CA5	12.6 JR-2763-0	24
1V6	1.1 EX-3120-6	29	0	P6*	12CM6	12.6 EV-3917-0	21
1V6	1.1 EX-5600-1	50	0	P5*	12CN5	12.6 JR-0673-2	0
1W4	1.5 DX-6210-0	49	45	P4	12CR6	12.6 JR-7563-2	11
1W5	1.1 EV-2780-0	33	73	P4	12CR6	12.6 JR-0203-0	0
1Yn	1.1 EV-2780-0	33	73	P4	12CS6	12.6 JR-7562-3	Use this setting for short check only.

See note at end of chart.  
 1V5 1.1 EV-2780-0  
 1V6 1.1 EX-3120-6  
 1V6 1.1 EX-5600-1  
 1W4 1.5 DX-6210-0  
 1W5 1.1 EV-2780-0  
 1Yn 1.1 EV-2780-0



Reworked by  
PAØPGA

This manual was downloaded from BAMA's  
boatanchor site <http://bama.sbc.edu>



Part No.	Description	QTY	Unit	Part No.	Description	QTY	Unit	Part No.	Description	QTY	Unit	Part No.	Description	QTY	Unit
1W4	Cap-P	49	P4	1.5 DX-6210-0	Cap-P	41	P4	1.1 DX-2305-0	Cap-P	41	P4	1.5 JR-0000-0	Diode No. 1	0	P5*
1W5	Cap-P	33	P4	1.1 EV-2780-0	Cap-P	70	P5*	2.5 JR-2305-0	Cap-P	81	P4	1.5 JR-0236-0	Diode No. 1	30	P4
1X2	Cap-P	0	P5*	1.1 BS-0000-0	Cap-P	0	P5*	1.5 JR-0307-0	Cap-P	0	P5*	2.5 JR-0536-0	Diode No. 1	30	P1*
1Z2	Cap-P	0	P5*	1.5 DS-0000-0	Cap-P	0	P5*	2.5 JR-0436-0	Cap-P	0	P5*	2.5 JR-0608-0	Diode No. 2	0	P1*
2A3	Cap-P	67	P4	2.5 JR-3200-0	Cap-P	82	P4	6.3 JR-0307-0	Cap-P	0	P2*	6.3 JR-0608-0	Diode No. 2	0	P2*
2AF4	Cap-P	41	P4	2.5 JR-2305-0	Cap-P	41	P4	2.0 JR-2503-0	Cap-P	18	P4	2.0 JR-2503-0	Cap-P	18	P4
2B3	Cap-P	0	P5*	1.5 JR-0000-0	Cap-P	0	P5*	6.3 JR-4506-0	Cap-P	38	P4	6.3 JR-0302-0	Cap-P	38	P4
2B7	Cap-P	30	P4	2.5 JR-0236-0	Cap-P	30	P4	7.5 JR-3200-0	Cap-P	37	P4	7.5 JR-3200-0	Cap-P	37	P4
2B7	Cap-P	30	P1*	2.5 JR-0536-0	Cap-P	30	P1*	12.6 JX-2103-0	Cap-P	41	P4	12.6 JX-2103-0	Cap-P	41	P4
2B7	Cap-P	30	P1*	2.5 JR-0436-0	Cap-P	30	P1*	6.3 KR-7608-2	Cap-P	13	P4	6.3 KR-7608-2	Cap-P	13	P4
2B23	Cap-P	0	P2*	6.3 JR-0307-0	Cap-P	0	P2*	6.3 KR-3402-8	Cap-P	13	P4	6.3 KR-3402-8	Cap-P	13	P4
2BNA	Cap-P	18	P4	2.0 JR-2503-0	Cap-P	18	P4	12.6 JX-4506-1	Cap-P	15	P4	12.6 JX-4506-1	Cap-P	15	P4
2BNA	Cap-P	26	P4	2.0 JR-2503-0	Cap-P	26	P4	12.6 JX-2103-5	Cap-P	15	P4	12.6 JX-2103-5	Cap-P	15	P4
2C21	Cap-P	38	P4	6.3 JR-4506-0	Cap-P	82	P4	6.3 JR-5007-0	Cap-P	0	P4	6.3 JR-5007-0	Cap-P	0	P4
2C21	Cap-P	38	P4	6.3 JR-0302-0	Cap-P	38	P4	2.0 DS-4107-0	Cap-P	29	P4	2.0 DS-4107-0	Cap-P	29	P4
2C46	Cap-P	37	P4	7.5 JR-3200-0	Cap-P	76	P4	2.5 JR-3562-0	Cap-P	23	P4	2.5 JR-3562-0	Cap-P	23	P4
2C50	Cap-P	41	P4	12.6 JX-2103-0	Cap-P	41	P4	6.3 JR-3602-5	Cap-P	81	P4	6.3 JR-3602-5	Cap-P	81	P4
2C50	Cap-P	41	P4	12.6 JX-1606-0	Cap-P	69	P4	6.3 JR-3024-0	Cap-P	0	P5*	6.3 JR-3024-0	Cap-P	0	P5*
2C51	Cap-P	41	P4	12.6 JX-1606-0	Cap-P	69	P4	6.3 JR-5030-0	Cap-P	0	P4	6.3 JR-5030-0	Cap-P	0	P4
2C51	Cap-P	13	P4	6.3 KR-7608-2	Cap-P	88	P4	6.3 JR-6040-7	Cap-P	0	P4	6.3 JR-6040-7	Cap-P	0	P4
2C51	Cap-P	13	P4	6.3 KR-3402-8	Cap-P	88	P4	6.3 JR-5032-7	Cap-P	37	P4	6.3 JR-5032-7	Cap-P	37	P4
2C52	Cap-P	15	P4	12.6 JX-4506-1	Cap-P	48	P4	6.3 JR-3562-2	Cap-P	20	P4	6.3 JR-3562-2	Cap-P	20	P4
2C52	Cap-P	15	P4	12.6 JX-2103-5	Cap-P	48	P4	1.1 DV-4120-0	Cap-P	41	P4	1.1 DV-4120-0	Cap-P	41	P4
2C53	Cap-P	0	P4	6.3 JR-5007-0	Cap-P	0	P4	1.1 DV-4120-0	Cap-P	41	P4	1.1 DV-4120-0	Cap-P	41	P4
2C53	Cap-P	0	P4	6.3 JR-5007-0	Cap-P	0	P4	1.1 DV-4120-0	Cap-P	41	P4	1.1 DV-4120-0	Cap-P	41	P4
2CW4	Cap-P	29	P4	2.0 DS-4107-0	Cap-P	68	P4	1.1 DV-4120-0	Cap-P	41	P4	1.1 DV-4120-0	Cap-P	41	P4
2CY5	Cap-P	23	P4	2.5 JR-3562-0	Cap-P	81	P4	1.1 DV-4120-0	Cap-P	41	P4	1.1 DV-4120-0	Cap-P	41	P4
2D21	Cap-P	81	P4	6.3 JR-3602-5	Cap-P	81	P4	1.1 DV-4120-0	Cap-P	41	P4	1.1 DV-4120-0	Cap-P	41	P4
2E22	Cap-P	0	P5*	6.3 JR-3024-0	Cap-P	0	P5*	1.1 DV-4120-0	Cap-P	41	P4	1.1 DV-4120-0	Cap-P	41	P4
2E24	Cap-P	35	P4	6.3 JR-5030-0	Cap-P	82	P4	1.1 DV-4120-0	Cap-P	40	P4	1.1 DV-4120-0	Cap-P	40	P4
2E25	Cap-P	0	P4	6.3 JR-6040-7	Cap-P	0	P4	1.1 DV-4120-0	Cap-P	40	P4	1.1 DV-4120-0	Cap-P	40	P4
2E25	Cap-P	0	P4	6.3 JR-6040-7	Cap-P	0	P4	1.1 DV-4120-0	Cap-P	40	P4	1.1 DV-4120-0	Cap-P	40	P4
2E26	Cap-P	37	P4	6.3 JR-5032-7	Cap-P	84	P4	1.1 EW-5120-0	Cap-P	45	P4	1.1 EW-5120-0	Cap-P	45	P4
2E30	Cap-P	20	P4	6.3 JR-3562-2	Cap-P	81	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2E31	Cap-P	41	P4	1.1 DV-4120-0	Cap-P	73	P4	1.1 EW-5120-0	Cap-P	45	P4	1.1 EW-5120-0	Cap-P	45	P4
2E32	Cap-P	41	P4	1.1 DV-4120-0	Cap-P	73	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2E35	Cap-P	41	P4	1.1 DV-4120-0	Cap-P	73	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2E36	Cap-P	40	P4	1.1 DV-4120-0	Cap-P	73	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2E36	Cap-P	40	P4	1.1 DV-4120-0	Cap-P	73	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2E41	Cap-P	45	P4	1.1 EW-5120-0	Cap-P	73	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2E41	Cap-P	45	P4	1.1 EW-5120-0	Cap-P	73	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2E42	Cap-P	45	P4	1.1 EW-5120-0	Cap-P	73	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2E42	Cap-P	45	P4	1.1 EW-5120-0	Cap-P	73	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2EA5	Cap-P	0	P4	1.1 EW-0300-0	Cap-P	0	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2EA5	Cap-P	0	P4	1.1 EW-0300-0	Cap-P	0	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2EN5	Cap-P	13	P4	2.5 JR-3562-0	Cap-P	85	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2EN5	Cap-P	13	P4	2.5 JR-3562-0	Cap-P	85	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2EN5	Cap-P	0	P1*	2.0 JR-0705-6	Cap-P	60	P1*	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2EN5	Cap-P	0	P1*	2.0 JR-0205-6	Cap-P	60	P1*	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2ER5	Cap-P	20	P4	2.0 JR-2567-0	Cap-P	82	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2ER5	Cap-P	20	P4	2.0 JR-2567-0	Cap-P	82	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2ES5	Cap-P	10	P4	2.5 JR-2503-0	Cap-P	86	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2ES5	Cap-P	10	P4	2.5 JR-2503-0	Cap-P	86	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2EV5	Cap-P	18	P4	2.5 JR-3562-0	Cap-P	87	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2EV5	Cap-P	18	P4	2.5 JR-3562-0	Cap-P	87	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2FH5	Cap-P	15	P4	2.5 JR-2507-0	Cap-P	88	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2FH5	Cap-P	15	P4	2.5 JR-2507-0	Cap-P	88	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2FQ5	Cap-P	27	P4	2.5 JR-2507-0	Cap-P	78	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2FQ5	Cap-P	27	P4	2.5 JR-2507-0	Cap-P	78	P4	1.1 EW-0300-0	Cap-P	0	P1*	1.1 EW-0300-0	Cap-P	0	P1*
2G21	Cap-P	46	P5*	1.1 EX-3265-1	Cap-P	46	P5*	1.1 EX-3265-1	Cap-P	46	P5*	1.1 EX-3265-1	Cap-P	46	P5*
2G21	Cap-P	46	P5*	1.1 EX-3265-1	Cap-P	46	P5*	1.1 EX-3265-1	Cap-P	46	P5*	1.1 EX-3265-1	Cap-P	46	P5*
2G21	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*
2G21	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*
2G22	Cap-P	40	P4	2.5 JR-2305-0	Cap-P	86	P4	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*
2G22	Cap-P	40	P4	2.5 JR-2305-0	Cap-P	86	P4	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*
2T4	Cap-P	0	P5*	2.5 JR-0005-0	Cap-P	0	P5*	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*
2T4	Cap-P	0	P5*	2.5 JR-0005-0	Cap-P	0	P5*	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*
2X2A	Cap-P	0	P5*	2.5 JR-0000-0	Cap-P	0	P5*	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*
2X2A	Cap-P	0	P5*	2.5 JR-0000-0	Cap-P	0	P5*	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*
3A2	Cap-P	0	P5*	3.0 BS-0000-0	Cap-P	0	P5*	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*
3A2	Cap-P	0	P5*	3.0 BS-0000-0	Cap-P	0	P5*	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*
3A3	Cap-P	0	P5*	3.0 JR-0000-0	Cap-P	0	P5*	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*
3A3	Cap-P	0	P5*	3.0 JR-0000-0	Cap-P	0	P5*	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*
3A4	Cap-P	33	P4	2.5 DX-8210-0	Cap-P	73	P4	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*
3A4	Cap-P	33	P4	2.5 DX-8210-0	Cap-P	73	P4	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*
3A5	Cap-P	32	P4	3.0 DX-5600-0	Cap-P	73	P4	1.1 EX-3100-0	Cap-P	44	P5*	1.1 EX-3100-0	Cap-P	44	P5*
3A5	Cap-P	32	P4	3.0 DX-5600-0	Cap-P	73	P4	1.1 EX-3100-0	Cap-P	44	P5*				





5B8	5.0 EV-2301-9	83	P4	3300	Triode Sect.
5B8	5.0 EV-9678-3	15	P4	2250	pent. sect. (see 5B13)
5B8	5.0 EV-1203-0	16	P4	4500	Triode Sect.
5BK7A	5.0 EV-7608-9	22	P4	4000	Triode No. 1
5BK7A	5.0 EV-2103-9	22	P4	4000	Triode No. 2
5B07A	5.0 EV-7608-9	13	P4	5300	Triode No. 1
5B07A	5.0 EV-2103-9	13	P4	5300	Triode No. 2
5BR8	5.0 EV-9678-0	15	P4	2250	Pent. Sect.
5BR8	5.0 EV-1203-0	16	P4	4500	Triode Sect.
5BR8	5.0 EV-7608-9	20	P4	4000	Triode No. 1
5BR8	5.0 EV-2103-9	20	P4	4000	Triode No. 2
5BT8	5.0 EV-8679-0	22	P4	2200	Pent. Sect.
5BT8	5.0 EV-0103-0	0	P1*		
5BT8	5.0 EV-0203-0	0	P1*		
5BW8	5.0 EV-6987-0	15	P4	2250	Pent. Sect.
5BW8	5.0 EV-0302-0	0	P1*		
5BW8	5.0 EV-0102-0	0	P1*		
5BZ7	5.0 EV-7608-9	18	P4	5000	Triode No. 1
5BZ7	5.0 EV-2103-9	18	P4	5000	Triode No. 2
5CG8	5.0 EV-1203-0	20	P4	3000	Pent. Sect.
5CL8	5.0 EV-9678-0	12	P4	3000	Triode Sect.
5CL8	5.0 EV-1203-0	12	P4	4500	Tetrode Sect.
5CM6	5.0 EV-3917-0	21	P4	3700	Triode Sect.
5CM8	5.0 EV-2673-0	22	P4	2200	Pent. Sect.
5CM8	5.0 EV-9108-0	16	P4	1000	Triode Sect.
5CO8	5.0 EV-2637-0	16	P4	2800	Tetrode Sect.
5CO8	5.0 EV-9108-0	23	P4	3400	Triode Sect.
5CU4	5.0 HR-0602-0	0	P3*		
5CU4	5.0 HR-0402-0	0	P3*		
5CZ5	5.0 EV-3917-0	12	P4	4800	Pent. Sect.
5DH8	5.0 EV-9678-0	20	P4	3300	Triode Sect.
5DH8	5.0 EV-1203-0	25	P4	1600	Pent. Sect.
5E8	5.0 EV-2637-0	19	P4	2500	Pent. Sect.
5E8	5.0 EV-9108-0	19	P4	3800	Triode Sect.
5E8	5.0 EV-7986-0	20	P4	2300	Pent. Sect.
5EH8	5.0 EV-2301-0	22	P4	4100	Triode Sect.
5ES8	5.0 EV-7608-0	28	P4	5500	Triode No. 1
5ES8	5.0 EV-2103-0	28	P4	5500	Triode No. 2
5EU8	5.0 EV-7198-0	19	P4	2500	Pent. Sect.
5EU8	5.0 EV-2306-0	19	P4	3800	Triode Sect.
5EW6	5.0 JR-3562-7	23	P4	2100	Pent. Sect.
5FG7	5.0 EV-9678-0	17	P4	2900	Triode Sect.
5FG7	5.0 EV-1203-0	25	P4	3100	Triode Sect.
5FV8	5.0 EV-9678-0	17	P4	2700	Pent. Sect.
5FV8	5.0 EV-1203-0	23	P4	4250	Triode Sect.
5GH8	5.0 EV-2637-0	13	P4	4000	Pent. Sect.
5GH8	5.0 EV-9108-0	12	P4	5500	Triode Sect.
5J6	5.0 JR-5207-0	20	P4	3000	Triode No. 1
5J6	5.0 JR-6307-0	20	P4	3000	Triode No. 2
5R4	5.0 HR-0600-0	0	P3*		
5R4	5.0 HR-0400-0	0	P3*		
5T4	5.0 HR-0600-0	0	P3*		
5T4	5.0 HR-0400-0	0	P3*		
5T8	5.0 EV-8907-6	11	P4	1200	Triode Sect.
5T8	5.0 EV-0607-1	0	P1*		
5T8	5.0 EV-0203-7	0	P1*		
5T8	5.0 EV-0107-8	0	P1*		
5U4	5.0 HR-0600-0	0	P3*		
5U4	5.0 HR-0400-0	0	P3*		
5UB	5.0 EV-2667-0	15	P4	2250	Pent. Sect.
14E6	12.6 JR-3207-0	12	P4	1800	Triode Sect.
14E6	12.6 JR-0807-2	12	P1*		
14E6	12.6 JR-0507-2	12	0		
14F7	12.6 JR-5607-3	0	P4	1600	Triode No. 1
14F7	12.6 JR-4302-6	0	P4	1600	Triode No. 2
14F8	12.6 HS-8605-0	10	P4	4000	Triode No. 1
14F8	12.6 HS-1304-0	10	P4	4000	Triode No. 2
14GT8	12.6 EV-8907-0	10	P4	550	Triode Sect.
14GT8	12.6 EV-0601-0	0	P1*		
14GT8	12.6 EV-0203-0	0	P1*		
14H7	12.6 JR-6237-4	10	P4	3000	Triode No. 1
14J7	12.6 JR-6257-4	18	P4	800	Pent. Sect.
14J7	12.6 JR-4357-6	18	P4	1000	Triode Sect.
14N7	12.6 JR-5607-3	23	P4	2000	Triode No. 1
14N7	12.6 JR-4302-6	23	P4	2000	Triode No. 2
14O7	12.6 JR-6237-4	21	P4	500	Pent. Sect.
14O7	12.6 JR-4237-8	21	P4	800	Osc. Sect.
14R7	12.6 JR-6257-0	10	P4	3000	Pent. Sect.
14R7	12.6 JR-0407-2	10	P1*		
14R7	12.6 JR-0307-2	10	P1*		
14S7	12.6 JR-6207-4	18	P4	1500	Diode No. 1
14S7	12.6 JR-4357-6	0	P4	4000	Heptode Sect.
14V7	12.6 JR-6237-4	6	P4	4000	Triode Sect.
14W7	12.6 JR-6237-5	11	P4	3000	Triode Sect.
14X7	12.6 JR-3204-0	0	P4	900	Triode Section
14X7	12.6 JR-0504-0	0	P1*		
14X7	12.6 JR-0607-0	0	P1*		
14Y4	12.6 JR-0807-0	0	P3*		
14Y4	12.6 JR-0307-0	0	P3*		
15A6	12.6 EV-2713-6	11	P4	7500	Plate No. 1
15EW6	12.6 JR-3562-7	22	P4	3000	Plate No. 2
17A5	20.0 JR-2573-0	30	P4	5500	Triode No. 1
17AX4	20.0 JX-0503-0	0	P3*		
17BQ6	20.0 JR-5047-0	50	P4	4500	Diode No. 2
17C5	20.0 JR-2763-0	23	P4	6000	Plate No. 1
17CA5	20.0 JR-2763-0	20	P4	5000	Plate No. 2
17D4	20.0 JX-0503-0	0	P3*		
17DE4	20.0 JX-0503-0	0	P3*		
17DQ6	20.0 JR-5047-0	32	P4	6000	Cap = P
17H3	20.0 EV-0301-0	0	P4	5000	Cap = P
17L6	20.0 JR-5347-0	30	P4	5000	Cap = P
17R5	20.0 JR-2763-0	23	P4	4800	Cap = P
18A5	20.0 JR-2573-0	40	P4	4800	Cap = P
18DZ8	20.0 EV-3572-0	29	P4	5500	Cap = P
18DZ8	20.0 EV-1908-0	25	P4	500	Cap = P
18FW6	20.0 JR-3567-2	23	P4	1800	Cap = P
18FX6	20.0 JR-3562-7	22	P4	1000	Cap = P
18FX6	20.0 JR-3602-7	22	P4	4400	Cap = P
18FY6	20.0 JR-3702-0	28	P4	4400	Cap = P
18FY6	20.0 JR-0602-0	0	P1*		
18FY6	20.0 JR-0502-0	0	P1*		
18HB8	20.0 EV-9768-0	24	P4	2400	Cap = P
18HB8	20.0 EV-1302-0	26	P4	960	Cap = P
19AQ5	20.0 JR-3562-0	21	P4	3700	Cap = P
19AU4	20.0 JX-0503-0	0	P3*		
19BG6	20.0 JR-5073-0	24	P4	6000	Cap = P



Reworked by PAØPGA

This manual was downloaded from BAMA's boatanchor site <http://bama.sbc.edu>



Part No.	Part Description	Quantity	Part No.	Part Description	Quantity	Part No.	Part Description	Quantity	Part No.	Part Description	Quantity	Part No.	Part Description	Quantity
5U8	5.0 EV-2637-0	15	76	P4	2250	Pent. Sect.	195G5	20.0 JR-5073-0	24	59	P4	6000	Cap=P	
5U8	5.0 EV-9108-0	16	87	P4	4500	Triode Sect.	See note at end of chart.							
5V3	6.3 HR-0600-4	0	50	P3*		Plate No. 1	19C8	20.0 EV-8907-0	23	0	P4	500	Triode Sect.	
5V4	6.3 HR-0400-6	0	45	P3*		Plate No. 2	19C8	20.0 EV-8607-0	0	60	P1*		Diode No. 1	
5V4	5.0 HR-0600-0	0	60	P3*		Plate No. 1	19C8	20.0 EV-8203-0	0	60	P1*		Diode No. 2	
5V4	5.0 HR-0400-0	0	60	P3*		Plate No. 2	19C8	20.0 EV-8107-0	0	60	P1*		Diode No. 3	
5V6	5.0 JR-5347-0	21	85	P4	3700		19CL8A	20.0 EV-9678-0	19	81	P4	3000	Triode Sect.	
5W4	5.0 HR-0600-0	0	20	P3*		Plate No. 1	19CL8A	20.0 EV-1203-0	12	87	P4	4500	Triode Sect.	
5W4	5.0 HR-0400-0	0	18	P3*		Plate No. 2	19EA8	20.0 EV-2637-0	22	78	P4	2500	Pentode Sect.	
5X4	5.0 JX-0500-0	0	43	P3*		Plate No. 1	19EA8	20.0 EV-9108-0	19	85	P4	3800	Triode Sect.	
5X4	5.0 JX-0300-0	0	39	P3*		Plate No. 2	19J6	20.0 JR-5207-6	28	78	P4	2560	Plate No. 1	
5X8	5.0 EV-7986-1	10	81	P4	3000	Pent. Sect.	19J6	20.0 JR-6307-5	28	78	P4	2500	Plate No. 2	
5X8	5.0 EV-2386-1	20	81	P4	3000	Triode Sect.	See note at end of chart.							
5Y3	5.0 HR-0600-0	0	22	P3*		Plate No. 1	19T8	20.0 EV-8907-6	11	58	P4	1200	Triode Section	
5Y3	5.0 HR-0400-0	0	18	P3*		Plate No. 2	See note at end of chart.							
5Y4	5.0 JX-0500-0	0	16	P3*		Plate No. 1	19T8	20.0 EV-0607-1	0	50	P1*		Diode No. 1	
5Y4	5.0 JX-0300-0	0	12	P3*		Plate No. 2	19T8	20.0 EV-0203-7	0	50	P1*		Diode No. 2	
5Z3	5.0 JR-0300-0	0	49	P3*		Plate No. 1	19T8	20.0 EV-0107-8	0	50	P1*		Diode No. 3	
5Z4	5.0 JR-0200-0	0	43	P3*		Plate No. 2	19V8	20.0 EV-6103-8	11	56	P4	1200	Triode Sect.	
5Z4	5.0 HR-0600-0	0	73	P3*		Plate No. 1	19V8	20.0 EV-0903-2	0	0	P1*		Diode No. 1	
5Z4	5.0 HR-0400-0	0	73	P3*		Plate No. 2	19V8	20.0 EV-0708-6	0	63	P1*		Diode No. 2	
6A3	6.3 JR-3200-0	67	82	P4	3000		19V8	20.0 EV-0203-8	0	63	P1*		Diode No. 3	
6A5	6.3 JR-5300-0	67	82	P4	3000		19X3	20.0 EV-0903-0	0	66	P3*			
6A6	6.3 JR-5604-0	12	65	P4	1500	Triode No. 1	19X8	20.0 EV-7986-1	10	81	P4	3000	Pent. Sect.	
6A6	6.3 JR-3204-0	12	65	P4	1500	Triode No. 2	19X8	20.0 EV-2386-1	20	81	P4	3000	Triode Sect.	
6A7	6.3 JR-0236-5	22	50	P4	1000	Pent. Sect. Cap=G	19Y3	20.0 EV-0903-0	0	66	P3*			
6A7	6.3 JR-6436-2	30	73	P4	300	Osc. Sect.	20E07	20.0 EV-2763-1	25	50	P4	1050	Pent. Sect.	
6A8	6.3 JR-0347-5	22	50	P4	1000	Triode No. 1	20E07	20.0 EV-0903-0	0	0	P1*		Triode No. 1	
6A8	6.3 JR-5647-3	30	73	P4	300	Triode No. 2	20E27	20.0 CR-8709-0	12	58	P4	1250	Triode No. 2	
6AB4	6.3 JR-6307-0	10	86	P4	4000		20E27	20.0 CR-5604-0	12	58	P4	1250	Triode No. 2	
6AB7/1803	6.3 JR-4765-3	0	84	P4	3500		21A6	20.0 EV-2083-9	46	90	P4	6000	Cap=P	
6AB8	6.3 EV-9683-7	24	80	P4	2800		21EX6	20.0 JR-5073-0	53	91	P4	7000	Cap=P	
6AB8	6.3 EV-2103-0	35	35	P4	800		22DE4	25.0 JX-0503-0	0	67	P3*			
6AC5	6.3 JR-5307-0	0	49	P4	1000		25A6	25.0 JR-5347-0	43	76	P4	2300		
6AC7/1852	6.3 JR-4765-3	10	87	P4	4500		25AV5	25.0 JR-2873-0	50	86	P4	3900		
6AD4	6.3 DW-1805-0	27	26	P4	700		25AX4	25.0 JX-0503-0	0	60	P3*			
6AD7	6.3 JR-5347-6	29	73	P4	2000		25BK5	25.0 EV-3186-0	0	91	P4	7000		
6AD7	6.3 JR-2607-3	0	15	P4	600		25BQ6	25.0 JR-5047-0	50	87	P4	4500	Cap=P	
6AF3	6.3 EV-0002-0	0	68	P3*			25C5	25.0 JR-2763-0	32	91	P4	7500		
6AF4	6.3 JR-2305-0	41	81	P4	3000		25C6	25.0 JR-5347-0	27	90	P4	7000		
6AF6	6.3 JR-4357-0	---	---	P4	---		25CA5	25.0 JR-2763-0	24	90	P4	6000	Cap=P	
6AF6	6.3 JR-3457-0	---	---	P4	---		25CD6	25.0 JR-5073-0	42	90	P4	6500	Cap=P	
6AG5	6.3 JR-3562-0	0	82	P4	3000		25CU6	25.0 JR-5047-0	50	87	P4	4500	Cap=P	
6AG7	6.3 JR-4765-2	18	88	P4	5000		26DN6	25.0 JR-5073-0	43	90	P4	6000	Cap=P	
6AH4	6.3 JR-2507-0	47	87	P4	4500		26DQ6	25.0 JR-5047-0	32	90	P4	6000	Cap=P	
6AH6	6.3 JR-3567-2	11	88	P4	5000		25EC6	25.0 JR-5073-0	62	87	P4	4500	Cap=P	
6AH7	6.3 JX-5604-3	20	73	P4	2000		25EH5	25.0 JR-2763-0	26	88	P4	4000		
6AH7	6.3 JX-2301-6	20	73	P4	2000		25F8	25.0 JR-2763-0	35	86	P4	4000		
6AJ4	6.3 JX-1502-0	25	87	P4	4500		26L6	25.0 JR-5347-2	30	90	P4	6500		
6AJ6	6.3 JR-3562-0	27	79	P4	2760		25W4	25.0 JX-0503-0	0	72	P3*			
6AK4	6.3 DW-1805-7	34	72	P4	1900		25W6	25.0 JR-5347-0	30	90	P4	6500		
6AK5	6.3 JR-3562-0	24	67	P4	1500		25Z6	25.0 JR-0507-2	0	40	P3*		Plate No. 1	
6AK6	6.3 JR-3567-2	23	74	P4	2100		25Z6	25.0 JR-0304-2	0	40	P3*		Plate No. 2	
6AL6	6.3 JR-0703-0	0	61	P1*			26A6	25.0 JR-3567-2	9	86	P4	4000		
6AL6	6.3 JR-0205-0	0	61	P1*			26A7	25.0 JW-2701-0	10	67	P5*		Triode No. 1	
6AL6	6.3 JR-5047-0	23	89	P4	5000		26A7	25.0 JW-3401-0	10	67	P5*		Triode No. 2	
6AL7	6.3 JR-6357-0	Vary	100	P4	---		26BK6	25.0 JR-3022-5	6	58	P4	1250	Triode Sect.	



Part No.	Part Description	Quantity	Notes	Part No.	Part Description	Quantity	Notes
6AL5	6.3 JX-1502-0	22	81	6AL5	25.0 JR-3567-2	9	85
6AL6	6.3 EV-2631-9	17	81	6AL6	25.0 JW-2701-0	10	67
6AL6	6.3 EV-0807-0	0	61	6AL7	25.0 JW-3401-0	10	67
6AL7	6.3 JR-2305-0	22	81	26A6	25.0 JR-3702-5	6	58
	6.3 JR-3567-0	11	92	26BK6	25.0 JR-0602-5	0	49
6AM4	6.3 HT-0508-0	0	25	26BK6	25.0 JR-0502-7	0	49
6AM8	6.3 HT-0805-0	0	25	26C6	25.0 JR-3702-0	18	72
6AN4	6.3 HT-0106-0	0	25	26C8	25.0 JR-3602-0	18	0
6AN5	6.3 HT-0206-0	0	25	26C8	25.0 JR-3602-0	18	0
6AN6	6.3 HT-0206-0	0	25	28D6	25.0 JR-7562-3	11	63
6AN8	6.3 EV-8679-1	9	86	28D6	25.0 JR-3562-7	0	67
6AO5	6.3 EV-2173-6	21	83	28E6	25.0 JR-5347-0	35	90
6AO6	6.3 JR-3562-0	21	85	28Z5W	25.0 EV-0608-0	0	55
6AO6	6.3 JR-3702-0	6	55	28Z5W	25.0 EV-0103-0	0	55
6AO7	6.3 JR-0602-0	6	0	28D7	25.0 JR-7536-2	17	87
6AO7	6.3 JX-4501-6	13	50	28D7	25.0 JR-2436-7	17	87
6AO7	6.3 JX-4301-6	0	0	32	2.0 JR-0230-0	37	23
6AR5	6.3 JX-3562-0	34	67	32ET5	35.0 JR-2763-0	39	85
6AR8	6.3 GX-8352-0	34	89	34GD5	35.0 JR-2763-0	37	89
6AR8	6.3 EV-6937-1	25	62	35B5	35.0 JR-3562-0	34	88
6AS5	6.3 EV-6837-1	25	62	35CD6	35.0 JR-5073-0	42	90
6AS6	6.3 JR-2763-0	26	89	35DZ8	35.0 EV-3672-0	29	89
6AS7	6.3 JR-3562-7	14	70	35EH9	35.0 EV-1908-0	25	0
6AS7	6.3 JX-4506-1	100	82	35GL6	35.0 JR-2763-0	15	91
6AS8	6.3 JX-2103-5	100	82	35HB8	35.0 EV-9768-0	40	88
6AS8	6.3 EV-2913-7	22	75	35HB8	35.0 EV-1302-0	26	46
6AS8	6.3 EV-0608-7	0	55	38L6	35.0 JR-5347-0	39	87
6AT6	6.3 JR-3702-0	11	58	35W4	BLST JR-0367-0	0	55
6AT6	6.3 JR-3502-0	11	0	35Y4	BLST JR-0247-0	0	55
6AT8	6.3 EV-9673-8	10	81	35Y4	35.0 JR-0207-0	0	60
6AT8	6.3 EV-1203-8	20	81	35Z3	35.0 JR-0207-0	0	60
6AU4	6.3 JX-0503-0	41	90	35Z5	BLST JR-0637-0	0	60
6AU5	6.3 JR-2573-0	41	90	36AM3	35.0 JR-0607-0	0	67
6AU5	6.3 JR-3567-2	16	76	40FR5	35.0 JR-0507-0	0	67
6AU7	6.3 EV-7608-0	24	75	50A8	50.0 JR-2763-0	38	87
6AU7	6.3 EV-2103-0	24	75	50B5	50.0 JR-8237-0	30	91
6AU8	6.3 EV-7896-0	20	84	50B5	50.0 JR-3562-0	23	91
6AV5	6.3 EV-2301-0	22	78	50BK5	50.0 EV-3186-0	0	91
6AV5	6.3 JR-2573-0	50	86	50BM8	50.0 EV-3672-0	30	86
6AV6	6.3 JR-3702-5	12	58	50BM8	50.0 EV-1908-0	15	61
6AV6	6.3 JR-3602-5	0	0	50C5	50.0 JR-2763-0	23	91
6AV6	6.3 JR-3502-7	0	0	50C8	50.0 JR-5347-2	44	90
6AW8	6.3 EV-7986-3	20	86	50DC4	50.0 JR-0507-0	0	64
6AX4	6.3 EV-2301-9	22	65	50EH5	50.0 JR-2763-0	26	88
6AX5	6.3 JX-0503-0	0	60	50FA5	50.0 JR-2763-0	37	89
6AX5	6.3 JR-0507-3	0	35	50FE5	50.0 JR-5347-0	34	90
6AX7	6.3 JR-0307-5	0	35	50FK5	50.0 JR-2763-0	24	88
6AX7	6.3 EV-7608-0	12	58	50FY8	50.0 EV-3672-0	32	88
6AX7	6.3 EV-2103-0	15	76	50FY8	50.0 EV-1908-0	27	39
6AX8	6.3 EV-2637-0	15	76	50L6	50.0 JR-5347-0	30	90
				50X6	50.0 JR-0607-5	0	55
				50X6	50.0 JR-0302-5	0	55
				50Y7	BLST JR-0060-0	0	55
				50Y7	50.0 JR-0507-0	0	55
				50Y7	50.0 JR-0304-0	0	55
				52	50.0 JR-3240-0	33	77
				53	6.3 JR-5694-2	12	65
					2.5 JR-5694-2	12	65



Reworked by PAØPGA

This manual was downloaded from BAMA's boatanchor site <http://bama.sbc.edu>



6AW8	6.3 EV-2301-9	1500	Triode Sect.	50X6	50.0 JR-0607-5	0	55	P3*	Plate No. 1
6AX4	6.3 JX-0503-0	-----	Plate No. 1	50X6	50.0 JR-0302-5	0	55	P3*	Plate No. 2
6AX5	6.3 JR-0507-3	-----	Plate No. 2	50Y7	BLST JR-0060-0	0	55	P3*	Short on 1-2-3-4-5
6AX7	6.3 JR-0307-5	-----	Triode No. 1	50Y7	50.0 JR-0507-0	0	55	P3*	Plate No. 1
6AX7	6.3 EV-2103-0	1250	Triode No. 2	50Y7	50.0 JR-0304-0	0	55	P3*	Plate No. 2
6AX8	6.3 EV-2637-0	1250	Triode Sect.	52	6.3 JR-3240-0	33	77	P4	Triode No. 1
6AX8	6.3 EV-9108-0	2250	Pent. Sect.	53	2.5 JR-5604-2	12	65	P4	Triode No. 2
6AZ5	6.3 DW-0807-0	4500	Triode Sect.	55	2.5 JR-3204-6	12	65	P4	Triode Sect. Cap-B
6AZ6	6.3 DW-0204-8	-----	Diode No. 1	55	2.5 JR-0205-0	39	49	P4	SEE NOTE 1. SEE TESTS ON ONE SIDE NO. 1. SEE OTHER SIDE ON NEW SCALE.
6AZ6	6.3 DW-0705-8	-----	Diode No. 2	55	2.5 JR-0405-0	39	0	P1*	Cap-G
6AZ8	6.3 EV-9807-0	4000	Diode No. 1	55	2.5 JR-0305-0	39	0	P1*	Cap-G
6AZ8	6.3 EV-6123-0	3300	Diode No. 2	56	2.5 JR-3204-0	29	65	P4	Cap-P
6B4	8.3 JR-5300-0	3000	Triode Sect.	57	2.5 JR-0235-4	21	68	P4	Pent. Sect.
6B7	6.3 JR-0236-0	1000	Pent. Sect. Cap-G	58	2.5 JR-0235-4	24	66	P4	Rect. Sect.
6B7	6.3 JR-0536-0	-----	Diode No. 1	59	2.5 JR-4236-5	22	73	P4	Triode Sect. Cap-B
6B7	6.3 JR-0436-0	-----	Diode No. 2	60F X5	50.0 JR-2763-0	20	91	P4	Diode No. 1
6BA5	6.3 DW-1678-0	2150	Ampl. Sect.	HY-65	6.3 JR-5040-7	0	82	P4	Diode No. 2
6BA6	6.3 JR-3567-2	3300	Osc. Sect.	KT66	6.3 JR-5347-2	20	90	P4	Cap-G
6BA7	6.3 EV-7913-2	750	Pent. Sect.	70L7	75.0 JR-5346-0	41	87	P4	Pent. Sect.
6BA7	6.3 EV-2913-7	750	Triode Sect.	70L7	75.0 JR-0702-3	41	61	P3*	Rect. Sect.
6BA8	6.3 EV-7986-0	5000	Triode Sect.	75	6.3 JR-0205-0	11	34	P4	Triode Sect. Cap-B
6BA8	6.3 EV-2301-0	2700	Triode Sect.	75	6.3 JR-0405-2	11	0	P1*	Diode No. 1
6BC4	6.3 EV-2106-0	4000	Diode No. 1	75	6.3 JR-0305-2	11	0	P1*	Diode No. 2
6BC5	6.3 JR-3562-0	3200	Diode No. 2	76	6.3 JR-3204-0	29	65	P4	Cap-G
6BC7	6.3 EV-0809-0	-----	Diode No. 1	77	6.3 JR-0235-4	21	58	P4	Cap-G
6BC7	6.3 EV-0607-0	-----	Diode No. 2	78	6.3 JR-0235-4	24	66	P4	Cap-G
6BC7	6.3 EV-0201-0	-----	Diode No. 3	80	5.0 JR-0300-0	0	20	P3*	Plate No. 1
6BC8	6.3 EV-7608-9	4000	Triode No. 1	80	5.0 JR-0200-0	0	15	P3*	Plate No. 2
6BC8	6.3 EV-2103-9	4000	Triode No. 2	83	5.0 JR-0300-0	0	70	P3*	Plate No. 1
6BD6	6.3 JR-2573-0	5000	Triode No. 2	83	5.0 JR-0200-0	0	65	P3*	Plate No. 2
6BD6	6.3 JR-3567-2	2000	Ampl. Sect.	83V	5.0 JR-0300-0	0	60	P3*	Plate No. 1
6BE6	6.3 JR-7562-3	1425	Osc. Sect.	83V	5.0 JR-0200-0	0	60	P3*	Plate No. 2
6BE7	6.3 JR-3562-7	1600	Osc. Sect.	84	6.3 JR-0304-0	0	35	P3*	Plate No. 1
6BE8	6.3 EV-7163-9	1000	REPT. SECT. SHORT ON 14	KT88	6.3 JR-0204-0	0	35	P3*	Plate No. 2
6BE8	6.3 EV-9678-3	2250	Triode Sect.	89/89Y	6.3 JR-5347-2	30	88	P4	Cap-G
6BF5	6.3 EV-1203-0	4500	Triode Sect.	117L7	6.3 JR-0235-4	37	66	P4	Pent. Sect.
6BF5	6.3 JR-3562-0	3400	Triode Section	117L7	117.0 JR-4357-0	37	86	P4	Rect. Sect.
6BF6	6.3 JR-3702-0	1900	Diode No. 1	117M7	117.0 JR-0602-0	37	61	P3*	Pent. Sect.
6BF6	6.3 JR-3602-0	-----	Diode No. 2	117M7	117.0 JR-4357-0	37	86	P4	Rect. Sect.
6BF6	6.3 DW-7805-0	2500	Triode No. 1	117N7	117.0 JR-0602-0	37	61	P3*	Rect. Sect.
6BF7	6.3 DW-2104-0	2500	Triode No. 2	117N7	117.0 JR-4356-0	37	87	P4	Rect. Sect.
6BG6	6.3 JR-5073-0	6000	Cap-P	117P7	117.0 JR-0700-0	37	75	P3*	Reverse Meter
6BG7	6.3 DW-7805-0	2500	Triode No. 1	117P7	117.0 JR-4356-0	37	86	P4	Rect. Sect.
6BG7	6.3 DW-2104-0	2500	Triode No. 2	117P7	117.0 JR-0700-0	37	61	P3*	Reverse Meter
6BH6	6.3 JR-3562-7	2000	Pent. Sect.	117Z3	117.0 JR-0506-0	0	50	P3*	Plate No. 1
6BH8	6.3 EV-7986-0	4500	Triode Sect.	117Z6	117.0 JR-0507-0	0	60	P3*	Plate No. 2
6BH8	6.3 EV-2301-0	3300	Triode Sect.	117Z6	117.0 JR-0304-0	0	60	P3*	Triode No. 1
6BJ6	6.3 JR-3562-7	3800	Diode No. 1	X-155	6.3 EV-7608-9	20	86	P4	Triode No. 2
6BJ7	6.3 EV-0809-3	-----	Diode No. 2	X-155	6.3 EV-2103-9	20	86	P4	OK over 275
6BJ7	6.3 EV-0607-3	-----	Diode No. 3	CK502AX	1.1 DV-1120-0	35	73	P4	Strikes at about 70
6BJ7	6.3 EV-0201-3	-----	-----	GL-502	6.3 JR-5367-0	7	55	P3*	-----

TESTER ARE AVAILABLE TWICE YEARLY  
A 2 YEAR SUBSCRIPTION (4 CHARTS)

REPLACEMENT ROLL CHARTS FOR YOUR TUBE  
\$1.75 PER CHART OR \$5.00 FOR



TESTER ARE AVAILABLE TWICE YEARLY  
A 2 YEAR SUBSCRIPTION (4 CHARTS)

REPLACEMENT ROLL CHARTS FOR YOUR TUBE  
\$1.75 PER CHART OR \$5.00 FOR

Part No.	Part Description	Quantity	Chart No.	Chart Description	Notes
68J8	6.3 EV-8709-0	24	80	Triode Sect.	
68J8	6.3 EV-0603-0	0	61	Diode No. 1	
68J8	6.3 EV-0102-0	0	61	Diode No. 2	
68K6	6.3 EV-3186-0	0	58	Triode Sect.	
68K6	6.3 JR-3702-5	6	58	Diode No. 1	
68K6	6.3 JR-0602-5	0	49	Diode No. 2	
68K6	6.3 JR-0502-7	0	49	Triode No. 1	
68K7	6.3 EV-7608-9	22	85	Triode No. 2	
68K7	6.3 EV-2103-9	22	85	Triode No. 1	
68L4	6.3 JX-0203-0	0	73	Triode No. 1	
68L7	6.3 JX-2103-0	23	88	Triode No. 2	
68L7	6.3 JX-4506-4	23	88	Pent. Sect.	
68M8	6.3 EV-3672-0	30	86	Triode Sect.	
68M8	6.3 EV-1908-0	15	61	Triode No. 1	
68N4	6.3 JR-2503-0	18	86	Triode No. 2	
68N4	6.3 JR-2503-0	26	83	Triode Sect.	
68N6	6.3 JR-2753-5	0	28	Triode No. 1	
68N6	6.3 JR-6753-2	0	43	Triode No. 2	
68N8	6.3 EV-8709-0	26	48	Triode Sect.	
68N8	6.3 EV-0603-0	0	61	Triode No. 1	
68N8	6.3 EV-0102-0	0	61	Triode No. 2	
68O6	6.3 EV-2793-0	13	91	Triode Sect.	
68O6	6.3 JR-5047-0	50	87	Triode No. 1	
68O7A	6.3 EV-7608-9	13	88	Triode No. 2	
68O7A	6.3 EV-2103-9	13	88	Triode Sect.	
68R8	6.3 EV-9678-0	15	76	Triode No. 1	
68R8	6.3 EV-1203-0	16	87	Triode No. 2	
68S8	6.3 EV-7608-9	20	86	Triode Sect.	
68S8	6.3 EV-2103-9	20	86	Triode No. 1	
68T6	6.3 JR-3702-0	13	60	Triode No. 2	
68T6	6.3 JR-3602-0	0	0	Triode No. 1	
68T6	6.3 JR-3502-0	0	0	Triode No. 2	
68T8	6.3 EV-8678-0	22	75	Pent. Sect.	
68T8	6.3 EV-0103-0	0	30	Diode No. 1	
68T8	6.3 EV-0203-0	0	30	Diode No. 2	
68U6	6.3 JR-3702-0	34	65	Triode Sect.	
68U6	6.3 JR-3602-0	0	0	Triode No. 1	
68U6	6.3 JR-3502-0	0	0	Triode No. 2	
68U8	6.3 EV-7821-9	0	59	Triode No. 1	
68U8	6.3 EV-7321-6	0	59	Triode No. 2	
68V8	6.3 EV-2301-0	23	86	Triode Sect.	
68V8	6.3 EV-0907-0	0	61	Triode No. 1	
68V8	6.3 EV-0608-0	0	61	Triode No. 2	
68W4	6.3 EV-0709-1	0	20	Plate No. 1	
68W4	6.3 EV-0109-7	0	20	Plate No. 2	
68W8	6.3 EV-6987-0	15	76	Pent. Sect.	
68W8	6.3 EV-0302-0	0	50	Diode No. 1	
68W8	6.3 EV-0102-0	0	50	Diode No. 2	
68X6	6.3 EV-2791-9	13	81	Triode No. 1	
68X7	6.3 JX-4506-1	35	92	Triode No. 2	
68X7	6.3 JX-2103-5	35	92	Triode No. 1	
68X8	6.3 EV-7608-9	33	78	Triode No. 2	
68X8	6.3 EV-2103-9	33	78	Triode No. 1	
68Y5	6.3 JR-0492-0	0	59	Plate No. 1	
CK503AX	1.1 DV-4120-0	40	73	Triode Sect.	OK over the 200 scale.
GK506AX	1.1 DV-4120-0	58	0	Triode Sect.	OK over the 200 scale.
CK512AX	1.1 DV-4210-0	0	0	Triode Sect.	OK over the 200 scale.
CK518AX	1.1 BV-4120-0	45	0	Triode Sect.	OK over the 200 scale.
CK522AX	1.1 DV-4120-0	40	0	Triode Sect.	OK over the 200 scale.
CK523AX	1.1 DV-4120-0	47	0	Triode Sect.	OK over the 200 scale.
CK524AX	1.1 DV-4120-0	73	0	Triode Sect.	OK over the 200 scale.
CK525AX	1.1 DV-4120-0	50	0	Triode Sect.	OK over the 200 scale.
CK526AX	1.1 DV-4120-0	59	0	Triode Sect.	OK over the 200 scale.
CK527AX	1.1 DV-4120-0	36	0	Triode Sect.	OK over the 200 scale.
CK528AX	1.1 DV-4120-0	37	0	Triode Sect.	OK over the 200 scale.
CK529AX	1.1 DV-4120-0	64	0	Triode Sect.	OK over the 200 scale.
CK533AX	1.1 DV-4120-0	35	0	Triode Sect.	OK over the 200 scale.
CK535AX	1.1 DV-4120-0	64	0	Triode Sect.	OK over the 200 scale.
CK541DX	1.1 DV-4120-0	40	0	Triode Sect.	OK over the 200 scale.
CK542DX	1.1 DV-4210-0	0	0	Triode Sect.	OK over the 200 scale.
CK543DX	1.1 DV-4210-0	0	0	Triode Sect.	OK over the 200 scale.
CK544DX	1.1 DV-4120-0	32	0	Triode Sect.	OK over the 200 scale.
CK546DX	1.5 DV-4210-0	0	0	Triode Sect.	OK over the 200 scale.
GL-546	6.3 JR-3752-0	4	66	Triode Sect.	OK over the 200 scale.
CK547DX	1.1 DV-4120-0	39	0	Triode Sect.	OK over the 200 scale.
CK548DX	1.1 DV-4120-0	54	0	Triode Sect.	OK over the 200 scale.
629	2.5 JR-3204-0	4	25	Triode Sect.	OK over the 200 scale.
717A	6.3 JR-4763-0	0	84	Triode Sect.	OK over the 200 scale.
801A	7.5 JR-3200-0	0	65	Triode Sect.	OK over the 200 scale.
802	6.3 JR-4036-5	22	73	Triode Sect.	OK over the 200 scale.
807	6.3 JR-3024-0	33	95	Triode Sect.	OK over the 200 scale.
809	6.3 JR-3000-0	0	68	Triode Sect.	OK over the 200 scale.
812	6.3 JR-3000-0	0	75	Triode Sect.	OK over the 200 scale.
814	10.0 JR-3024-0	0	80	Triode Sect.	OK over the 200 scale.
815	6.3 HV-8043-1	31	86	Triode Sect.	OK over the 200 scale.
815	6.3 CV-1043-8	31	86	Triode Sect.	OK over the 200 scale.
816	3.0 JR-0000-0	0	75	Triode Sect.	OK over the 200 scale.
837	12.6 JR-4036-5	0	87	Triode Sect.	OK over the 200 scale.
841	7.5 JR-3200-0	0	51	Triode Sect.	OK over the 200 scale.
842	7.5 JR-3200-0	61	56	Triode Sect.	OK over the 200 scale.
843	2.5 JR-3204-0	12	68	Triode Sect.	OK over the 200 scale.
884	1.1 JR-3200-0	45	22	Triode Sect.	OK over the 200 scale.
885	7.5 JR-3020-0	34	19	Triode Sect.	OK over the 200 scale.
886A	4.3 JR-0000-0	0	75	Triode Sect.	OK over the 200 scale.
879/2X2	2.5 JR-0000-0	0	73	Triode Sect.	OK over the 200 scale.
884	6.3 JR-5307-0	4	91	Triode Sect.	OK over the 200 scale.
885	2.5 JR-3204-0	4	91	Triode Sect.	OK over the 200 scale.
890	2.0 JR-3240-0	45	45	Triode Sect.	OK over the 200 scale.
951/1B4	2.0 JR-0230-0	35	22	Triode Sect.	OK over the 200 scale.
954	6.3 JR-7036-4	21	54	Triode Sect.	OK over the 200 scale.
955	6.3 JR-4306-0	22	72	Triode Sect.	OK over the 200 scale.
956	6.3 JR-7036-4	17	65	Triode Sect.	OK over the 200 scale.
957	1.5 JR-4300-0	28	23	Triode Sect.	OK over the 200 scale.
958	1.5 JR-4300-0	41	57	Triode Sect.	OK over the 200 scale.
959	1.5 JR-7030-0	28	17	Triode Sect.	OK over the 200 scale.



Reworked by  
PAØPGA

This manual was downloaded from BAMA's  
boatanchor site <http://bama.sbc.edu>



Part No.	Part Description	Quantity	Notes	Part No.	Part Description	Quantity	Notes
65W4	6.3 EV-0702-7	15	76	2250	Triode Sect.	P4	
6BW8	6.3 EV-6987-0	0	50	2250	Pent. Sect.	P4	
6BW8	6.3 EV-0302-0	0	50	2250	Diode No. 1	P1*	
6BW8	6.3 EV-0102-0	0	50	2250	Diode No. 2	P1*	
6BX6	6.3 EV-2781-9	13	81	3000	Triode No. 1	P4	
6BX7	6.3 JK-4506-1	35	92	7600	Triode No. 1	P4	
6BX7	6.3 JX-2103-5	35	92	7600	Triode No. 2	P4	
6BX8	6.3 EV-7608-9	33	78	2500	Triode No. 1	P4	
6BX8	6.3 EV-2103-9	33	78	2500	Triode No. 2	P4	
6BY5	6.3 JR-0462-0	0	59	2500	Plate No. 1	P3*	
6BY6	6.3 JR-0507-0	0	59	2500	Plate No. 2	P3*	
6BY6	6.3 JR-3562-7	21	56	1200	Triode No. 1	P4	
6BY8	6.3 EV-1789-2	16	76	2300	Pent. Sect.	P4	
6BY8	6.3 EV-0603-0	0	61	2300	Diode Sect.	P1*	
6BZ6	6.3 JR-3562-7	20	78	2500	Triode No. 1	P4	
6BZ7	6.3 EV-7608-9	18	88	5000	Triode No. 2	P4	
6BZ8	6.3 EV-2103-9	18	88	5000	Triode No. 1	P4	
6BZ8	6.3 EV-7608-9	20	86	4000	Triode No. 2	P4	
6C4	6.3 EV-2103-9	20	86	4000	Triode No. 1	P4	
6C5	6.3 JR-6307-0	24	75	2200	Triode No. 2	P4	
6C6	6.3 JR-5307-0	21	73	2000	Triode No. 1	P4	
6CA4	6.3 EV-0703-0	0	57	1225	Cap = G	P3*	
6CA4	6.3 EV-0103-0	0	57	1225	Plate No. 1	P3*	
6CA5	6.3 JR-2763-0	24	90	6000	Plate No. 2	P4	
6CA7	6.3 JR-5347-2	27	90	6000	Cap = P	P4	
6CB5	7.5 JR-4023-0	49	87	4500	Cap = P	P4	
6CB6	6.3 JR-3562-7	22	76	2200	Cap = P	P4	
6CD6	6.3 JR-5073-0	42	90	6500	Cap = P	P4	
6CE5	6.3 JR-3562-0	22	75	2200	Cap = P	P4	
6CF6	6.3 JR-3562-7	22	75	2200	Cap = P	P4	
6CG7	6.3 EV-7608-9	23	73	2000	Triode No. 1	P4	
6CG7	6.3 EV-2103-9	23	73	2000	Triode No. 2	P4	
6CG8	6.3 EV-9678-0	10	81	3000	Pent. Sect.	P4	
6CG8	6.3 EV-1203-0	20	81	3000	Triode Sect.	P4	
6CH7	6.3 EV-7608-0	18	88	5000	Triode No. 1	P4	
6CH7	6.3 EV-2103-0	18	88	5000	Triode No. 2	P4	
6CH8	6.3 EV-7236-0	9	86	4000	Pent. Sect.	P4	
6CH8	6.3 EV-8901-0	21	83	3300	Triode Sect.	P4	
6CJ6	6.3 EV-2073-1	54	87	4600	Cap = P	P4	
6CK4	6.3 JR-2507-0	44	89	5500	Cap = P	P4	
6CK6	6.3 EV-2713-6	5	91	7500	Cap = P	P4	
6CL5	6.3 JR-4023-0	55	90	5000	Cap = P	P4	
6CL5	6.3 EV-2631-7	18	88	5000	Tetrode Sect.	P4	
6CL8	6.3 EV-9678-0	12	81	3000	Triode Sect.	P4	
6CL8	6.3 EV-1203-0	12	87	4500	Triode Sect.	P4	
6CM6	6.3 EV-3917-0	21	85	3700	Triode No. 1	P4	
6CM7	6.3 EV-7603-0	24	73	2000	Triode No. 2	P4	
6CM7	6.3 EV-8109-0	20	87	4400	Triode No. 2	P4	
6CM8	6.3 EV-2673-0	22	75	2200	Pent. Sect.	P4	
6CM8	6.3 EV-9108-0	16	48	1000	Triode Sect.	P4	
6CN7	6.3 EV-7806-0	11	56	1200	Triode Sect.	P4	
6CN7	6.3 EV-0203-0	0	50	1200	Diode No. 1	P1*	
6CN7	6.3 EV-0103-0	0	50	1200	Diode No. 2	P1*	
6CQ4	6.3 JX-0603-0	0	67	2800	Tetrode Sect.	P3*	
6CQ8	6.3 EV-2637-0	16	80	3400	Triode Sect.	P4	
6CQ8	6.3 EV-9108-0	23	83	1950	Pent. Sect.	P4	
6CR6	6.3 JR-7563-2	12	72	2200	Diode Sect.	P1*	
6CR6	6.3 JR-0203-0	0	0	2800	Pent. Sect.	P4	
6CR8	6.3 EV-2673-8	12	82	2600	Triode Sect.	P4	
6CR8	6.3 EV-9108-0	25	79	2600	Triode Sect.	P4	
950	2.5 JR-3204-0	45	45	880	Triode No. 1	P4	Strikes at about 72
640	2.0 JR-3240-0	35	22	950	Triode No. 2	P4	Cap = G
1100	2.0 JR-0230-0	21	54	951/1B4	Triode No. 1	P4	Cap = P
1900	6.3 JR-7036-4	22	72	954	Triode No. 2	P4	
1500	6.3 JR-4306-0	22	65	955	Triode No. 1	P4	
650	6.3 JR-7036-4	17	65	956	Triode No. 2	P4	
1200	1.5 JR-4300-0	28	23	957	Triode No. 1	P4	Cap = P
600	1.5 JR-4300-0	41	57	958	Triode No. 2	P4	Cap = P
3000	1.5 JR-7030-0	28	17	959	Plate No. 1	P2*	
1800	AP-0105-0	0	40	CK1042	Plate No. 2	P2*	Diode
5000	6.3 JS-1304-0	15	82	1201	Triode No. 1	P4	
630	6.3 JR-0407-0	0	30	1203	Triode No. 2	P1*	
900	6.3 HS-5314-0	10	71	1204	Triode No. 1	P4	
2500	6.3 GS-4138-7	23	88	1222	Triode No. 2	P4	Cap = G
2000	2.0 JR-0230-0	37	18	1229	Triode No. 1	P4	
900	2.0 JR-3200-0	40	44	1230	Triode No. 2	P4	
2500	6.3 JR-6237-4	0	77	1231	Triode No. 1	P4	
2000	6.3 JR-6237-4	18	73	1232	Triode No. 2	P4	
2276	2.5 JR-0300-0	0	83	1237	Cap = G	P3*	Plate No. 1
2276	2.5 JR-0600-0	0	83	1237	Plate No. 2	P3*	Plate No. 2
1450	6.3 JR-6237-4	11	77	1273	Bayonet pin is over the grid pin. Use an adapter.	P4	
2275	6.3 JR-0507-3	0	33	1274	Cap = P	P3*	
2000	6.3 JR-0307-5	0	33	1274	Cap = P	P3*	
2275	5.0 JR-3200-0	34	65	1276/205D	Cap = P	P4	
2000	12.6 JR-6237-4	11	77	1280	Triode No. 1	P4	
5800	12.6 JR-6237-4	28	73	1284	Triode No. 2	P4	
1300	25.0 JR-5347-0	38	89	1285	Triode No. 1	P4	
2100	1.5 JR-6200-0	30	61	1293	Triode No. 2	P4	
1225	1.5 JR-0407-0	0	0	1294	Triode No. 1	P1*	Diode
725	2.5 JR-6230-0	37	74	1299	Triode No. 2	P4	Cap = G
650	6.3 JR-0235-4	21	58	1603	Pent. Sect.	P4	Cap Grid, Cap = G
650	1.1 JR-3240-0	22	32	1609	Triode Sect.	P4	Pin Grid
650	6.3 JR-0347-5	23	24	1612	Triode No. 1	P4	
2280	6.3 JR-5347-2	27	24	1612	Triode No. 2	P4	
5000	6.3 JR-5347-0	0	76	1618	Pent. Sect.	P4	
3400	6.3 JR-5347-2	23	89	1618	Triode Sect.	P4	
1265	2.6 JR-5340-7	12	84	1619	Cap = P	P4	Cap = G
2000	6.3 JR-0347-0	22	68	1620	Cap = P	P4	
5000	6.3 JR-5347-0	29	73	1622	Cap = P	P4	
2200	6.3 JR-3000-0	0	75	1623	Cap = P	P4	
4000	2.5 JR-3020-0	17	87	1624	Cap = P	P4	
8000	12.6 JR-5347-0	18	89	1631	Cap = P	P4	
3400	25.0 JX-4506-0	0	84	1632	Cap = P	P4	
1000	25.0 JX-2103-0	0	84	1633	Cap = P	P4	
1000	12.6 JX-4506-2	0	51	1634	Cap = P	P4	
1000	12.6 JX-3106-2	0	51	1634	Cap = P	P4	
880	6.3 JR-4307-0	0	40	1635	Cap = P	P4	
850	6.3 JR-5607-0	0	40	1635	Cap = P	P4	
Left Cap = P	5.0 JR-0000-0	0	40	1641	Cap = P	P3*	
Right Cap = P	5.0 BY-0000-0	0	40	1641	Cap = P	P3*	
Triode No. 1	6.3 JR-4606-0	38	62	1642	Cap = P	P4	
Triode No. 2	6.3 JR-0302-0	38	62	1642	Cap = P	P4	
Triode No. 1	12.6 JW-2751-3	10	75	1644	Cap = P	P4	
Triode No. 2	12.6 JW-3451-2	10	75	1644	Cap = P	P4	
Pentode No. 1	2.0 JR-3200-0	40	44	1658	Cap = P	P4	
Pentode No. 2	2.0 JR-3200-0	40	44	1658	Cap = P	P4	
Cap = G	2.0 JR-3200-0	40	44	1658	Cap = P	P4	



Part No.	Part Description	QTY	Notes	Part No.	Part Description	QTY	Notes
6CR8	6.3 EV-2913-8	12		6.3 EV-2913-8	12		
6CR8	6.3 EV-9108-0	25		6.3 EV-9108-0	25		
6CS6	6.3 JR-7562-3	43	Use this setting for short check only	6.3 JR-7562-3	43		
6CS6	6.3 JR-7608-0	17		6.3 JR-7608-0	17		
6CS7	6.3 EV-3109-0	24		6.3 EV-3109-0	24		
6CU5	6.3 JR-2763-0	37		6.3 JR-2763-0	37		
6CU6	6.3 JR-5047-0	50		6.3 JR-5047-0	50		
6CU8	6.3 EV-7236-1	9		6.3 EV-7236-1	9		
6CU8	6.3 EV-8901-0	21		6.3 EV-8901-0	21		
6CW4	6.3 DS-4107-0	29		6.3 DS-4107-0	29		
6CX8	6.3 EV-7988-0	16		6.3 EV-7988-0	16		
6CY5	6.3 EV-2301-0	24		6.3 EV-2301-0	24		
6CY7	6.3 JR-3562-0	23		6.3 JR-3562-0	23		
6CY7	6.3 EV-7608-0	23		6.3 EV-7608-0	23		
6CZ5	6.3 EV-2109-0	54		6.3 EV-2109-0	54		
6D4	6.3 EV-3917-0	12		6.3 EV-3917-0	12		
6D6	6.3 JR-3705-0	5		6.3 JR-3705-0	5		
6DA4	6.3 JR-0236-4	21		6.3 JR-0236-4	21		
6DA5	6.3 JX-0503-0	0		6.3 JX-0503-0	0		
	6.3 EV-1902-0	Vary 100	Connect a 1 megohm resistor from Plate jack to octal test socket pin No. 8.	6.3 EV-1902-0	Vary 100		
			Vary Bias to vary beam angle.				
6DA6	6.3 EV-2783-9	23		6.3 EV-2783-9	23		
6DA7	6.3 EV-7608-0	23		6.3 EV-7608-0	23		
6DA7	6.3 EV-3109-0	55		6.3 EV-3109-0	55		
6DB5	6.3 EV-3912-0	30		6.3 EV-3912-0	30		
6DB6	6.3 JR-3562-7	16		6.3 JR-3562-7	16		
6DC6	6.3 JR-3562-7	18		6.3 JR-3562-7	18		
6DE4	6.3 JX-0503-0	0		6.3 JX-0503-0	0		
6DE6	6.3 JR-3562-7	22		6.3 JR-3562-7	22		
6DE7	6.3 EV-7608-0	35		6.3 EV-7608-0	35		
6DE7	6.3 EV-2109-0	54		6.3 EV-2109-0	54		
6DE7	6.3 JR-5347-0	30		6.3 JR-5347-0	30		
6DJ6	6.3 EV-7608-0	28		6.3 EV-7608-0	28		
6DJ8	6.3 EV-2103-0	28		6.3 EV-2103-0	28		
6DK6	6.3 JR-3562-7	15		6.3 JR-3562-7	15		
6DN6	6.3 JR-5073-0	43		6.3 JR-5073-0	43		
6DN7	6.3 JX-4506-0	24		6.3 JX-4506-0	24		
6DN7	6.3 JX-2103-0	20		6.3 JX-2103-0	20		
6DO5	6.3 JR-2043-0	61		6.3 JR-2043-0	61		
6DO6	6.3 JR-5047-0	32		6.3 JR-5047-0	32		
6DR7	6.3 EV-7608-0	16		6.3 EV-7608-0	16		
6DR7	6.3 EV-2109-0	55		6.3 EV-2109-0	55		
6DS5	6.3 JR-3562-0	16		6.3 JR-3562-0	16		
6DT5	6.3 EV-3917-0	31		6.3 EV-3917-0	31		
6DT6	6.3 JR-3562-7	22		6.3 JR-3562-7	22		
6DT8	6.3 EV-7608-9	10		6.3 EV-7608-9	10		
6DT8	6.3 EV-2103-9	10		6.3 EV-2103-9	10		
6DW5	6.3 EV-3917-0	50		6.3 EV-3917-0	50		
6E5	6.3 JR-5403-0	—		6.3 JR-5403-0	—		
6E5	6.3 JR-3423-0	—		6.3 JR-3423-0	—		
6EA5	6.3 JR-3562-0	13		6.3 JR-3562-0	13		
6EA7	6.3 JX-4506-0	23		6.3 JX-4506-0	23		
6EA7	6.3 JX-2103-0	54		6.3 JX-2103-0	54		
6EA8	6.3 EV-2697-0	19		6.3 EV-2697-0	19		
6EA8	6.3 EV-9108-0	19		6.3 EV-9108-0	19		
6EB5	6.3 JR-0209-6	0		6.3 JR-0209-6	0		
6EB5	6.3 JR-0703-6	0		6.3 JR-0703-6	0		
6EB8	6.3 EV-7986-0	19		6.3 EV-7986-0	19		
6EB8	6.3 EV-2301-0	19		6.3 EV-2301-0	19		
6E5	6.3 EV-2913-8	12		6.3 EV-2913-8	12		
6E5	6.3 EV-9108-0	25		6.3 EV-9108-0	25		
6E5	6.3 JR-7562-3	43		6.3 JR-7562-3	43		
6E5	6.3 JR-7608-0	17		6.3 JR-7608-0	17		
6E5	6.3 EV-3109-0	24		6.3 EV-3109-0	24		
6E5	6.3 JR-2763-0	37		6.3 JR-2763-0	37		
6E5	6.3 JR-5047-0	50		6.3 JR-5047-0	50		
6E5	6.3 EV-7236-1	9		6.3 EV-7236-1	9		
6E5	6.3 EV-8901-0	21		6.3 EV-8901-0	21		
6E5	6.3 DS-4107-0	29		6.3 DS-4107-0	29		
6E5	6.3 EV-7988-0	16		6.3 EV-7988-0	16		
6E5	6.3 EV-2301-0	24		6.3 EV-2301-0	24		
6E5	6.3 JR-3562-0	23		6.3 JR-3562-0	23		
6E5	6.3 EV-7608-0	23		6.3 EV-7608-0	23		
6E5	6.3 EV-2109-0	54		6.3 EV-2109-0	54		
6E5	6.3 EV-3917-0	12		6.3 EV-3917-0	12		
6E5	6.3 JR-3705-0	5		6.3 JR-3705-0	5		
6E5	6.3 JR-0236-4	21		6.3 JR-0236-4	21		
6E5	6.3 JX-0503-0	0		6.3 JX-0503-0	0		
6E5	6.3 EV-1902-0	Vary 100	Connect a 1 megohm resistor from Plate jack to octal test socket pin No. 8.	6.3 EV-1902-0	Vary 100		
6E5			Vary Bias to vary beam angle.	6.3 EV-2783-9	23		
6E5	6.3 EV-7608-0	23		6.3 EV-7608-0	23		
6E5	6.3 EV-3109-0	55		6.3 EV-3109-0	55		
6E5	6.3 EV-3912-0	30		6.3 EV-3912-0	30		
6E5	6.3 JR-3562-7	16		6.3 JR-3562-7	16		
6E5	6.3 JR-3562-7	18		6.3 JR-3562-7	18		
6E5	6.3 JX-0503-0	0		6.3 JX-0503-0	0		
6E5	6.3 JR-3562-7	22		6.3 JR-3562-7	22		
6E5	6.3 EV-7608-0	35		6.3 EV-7608-0	35		
6E5	6.3 EV-2109-0	54		6.3 EV-2109-0	54		
6E5	6.3 JR-5347-0	30		6.3 JR-5347-0	30		
6E5	6.3 EV-7608-0	28		6.3 EV-7608-0	28		
6E5	6.3 EV-2103-0	28		6.3 EV-2103-0	28		
6E5	6.3 JR-3562-7	15		6.3 JR-3562-7	15		
6E5	6.3 JR-5073-0	43		6.3 JR-5073-0	43		
6E5	6.3 JX-4506-0	24		6.3 JX-4506-0	24		
6E5	6.3 JX-2103-0	20		6.3 JX-2103-0	20		
6E5	6.3 JR-2043-0	61		6.3 JR-2043-0	61		
6E5	6.3 JR-5047-0	32		6.3 JR-5047-0	32		
6E5	6.3 EV-7608-0	16		6.3 EV-7608-0	16		
6E5	6.3 EV-2109-0	55		6.3 EV-2109-0	55		
6E5	6.3 JR-3562-0	16		6.3 JR-3562-0	16		
6E5	6.3 EV-3917-0	31		6.3 EV-3917-0	31		
6E5	6.3 JR-3562-7	22		6.3 JR-3562-7	22		
6E5	6.3 EV-7608-9	10		6.3 EV-7608-9	10		
6E5	6.3 EV-2103-9	10		6.3 EV-2103-9	10		
6E5	6.3 EV-3917-0	50		6.3 EV-3917-0	50		
6E5	6.3 JR-5403-0	—		6.3 JR-5403-0	—		
6E5	6.3 JR-3423-0	—		6.3 JR-3423-0	—		
6E5	6.3 JR-3562-0	13		6.3 JR-3562-0	13		
6E5	6.3 JX-4506-0	23		6.3 JX-4506-0	23		
6E5	6.3 JX-2103-0	54		6.3 JX-2103-0	54		
6E5	6.3 EV-2697-0	19		6.3 EV-2697-0	19		
6E5	6.3 EV-9108-0	19		6.3 EV-9108-0	19		
6E5	6.3 JR-0209-6	0		6.3 JR-0209-6	0		
6E5	6.3 JR-0703-6	0		6.3 JR-0703-6	0		
6E5	6.3 EV-7986-0	19		6.3 EV-7986-0	19		
6E5	6.3 EV-2301-0	19		6.3 EV-2301-0	19		
6E5	6.3 EV-2913-8	12		6.3 EV-2913-8	12		
6E5	6.3 EV-9108-0	25		6.3 EV-9108-0	25		
6E5	6.3 JR-7562-3	43		6.3 JR-7562-3	43		
6E5	6.3 JR-7608-0	17		6.3 JR-7608-0	17		
6E5	6.3 EV-3109-0	24		6.3 EV-3109-0	24		
6E5	6.3 JR-2763-0	37		6.3 JR-2763-0	37		
6E5	6.3 JR-5047-0	50		6.3 JR-5047-0	50		
6E5	6.3 EV-7236-1	9		6.3 EV-7236-1	9		
6E5	6.3 EV-8901-0	21		6.3 EV-8901-0	21		
6E5	6.3 DS-4107-0	29		6.3 DS-4107-0	29		
6E5	6.3 EV-7988-0	16		6.3 EV-7988-0	16		
6E5	6.3 EV-2301-0	24		6.3 EV-2301-0	24		
6E5	6.3 JR-3562-0	23		6.3 JR-3562-0	23		
6E5	6.3 EV-7608-0	23		6.3 EV-7608-0	23		
6E5	6.3 EV-2109-0	54		6.3 EV-2109-0	54		
6E5	6.3 EV-3917-0	12		6.3 EV-3917-0	12		
6E5	6.3 JR-3705-0	5		6.3 JR-3705-0	5		
6E5	6.3 JR-0236-4	21		6.3 JR-0236-4	21		
6E5	6.3 JX-0503-0	0		6.3 JX-0503-0	0		
6E5	6.3 EV-1902-0	Vary 100	Connect a 1 megohm resistor from Plate jack to octal test socket pin No. 8.	6.3 EV-1902-0	Vary 100		
6E5			Vary Bias to vary beam angle.	6.3 EV-2783-9	23		
6E5	6.3 EV-7608-0	23		6.3 EV-7608-0	23		
6E5	6.3 EV-3109-0	55		6.3 EV-3109-0	55		
6E5	6.3 EV-3912-0	30		6.3 EV-3912-0	30		
6E5	6.3 JR-3562-7	16		6.3 JR-3562-7	16		
6E5	6.3 JR-3562-7	18		6.3 JR-3562-7	18		
6E5	6.3 JX-0503-0	0		6.3 JX-0503-0	0		
6E5	6.3 JR-3562-7	22		6.3 JR-3562-7	22		
6E5	6.3 EV-7608-0	35		6.3 EV-7608-0	35		
6E5	6.3 EV-2109-0	54		6.3 EV-2109-0	54		
6E5	6.3 JR-5347-0	30		6.3 JR-5347-0	30		
6E5	6.3 EV-7608-0	28		6.3 EV-7608-0	28		
6E5	6.3 EV-2103-0	28		6.3 EV-2103-0	28		
6E5	6.3 JR-3562-7	15		6			

Part No.	Part Description	Quantity	Notes	Part No.	Part Description	Quantity	Notes
6EA8	6.3 EV-2637-0	19	78	2500	Pent. Sect.	5696	
6EA9	6.3 EV-9108-0	19	85	3900	Triode Sect.	5702	
6EB5	6.3 JR-0205-6	0	40	5703	Diode No. 1	5704	
6EB5	6.3 JR-0703-6	0	40	5704	Diode No. 2	5718	
6EB8	6.3 EV-7986-0	19	87	5719	Pent. Sect.	5725	
6EB8	6.3 EV-2301-0	19	55	5726	Triode Sect.	5727	
6EH5	6.3 JR-2763-0	26	88	5726	Triode Sect.	5732	
6EH8	6.3 EV-7986-0	20	75	5742	Triode Sect.	5744	
6EH8	6.3 EV-2301-0	22	86	5749	Triode Sect.	5750	
6EM5	6.3 EV-3917-0	27	88	5750	Triode No. 1	5751	
6EM7	6.3 JX-4506-0	15	50	5751	Triode No. 2	5753	
6EM7	6.3 JX-2103-0	54	92	5753	Triode No. 2	5742	
6EO7	6.3 EV-2763-1	25	50	5742	Pent. Sect.	5744	
6EO7	6.3 EV-0803-0	0	0	5744	REVERSE METER, SOCKET TRIMMER SHOW SOCKET ON 1 HOLD DOWN P1 AND PRESS PL. RELEASE P1 BEFORE PL.	5749	
6ER5	6.3 JR-2567-0	20	82	3400	Triode Sect.	5750	
6ES5	6.3 JR-2503-0	10	86	4200	Triode No. 1	5750	
6ES8	6.3 EV-7608-0	28	89	5500	Triode No. 2	5751	
6ES8	6.3 EV-2103-0	28	89	5500	Triode No. 1	5751	
6EU7	6.3 BS-8709-0	12	58	1250	Triode No. 2	5751	
6EU7	6.3 BS-5604-0	12	58	1250	Triode No. 2	5751	
6EU8	6.3 EV-7198-0	19	78	2500	Pent. Sect.	5784	
6EU8	6.3 EV-2306-0	19	85	3800	Triode Sect.	5785	
6EV5	6.3 JR-3562-0	18	87	4600	Triode No. 1	5812	
6EV7	6.3 EV-7608-0	20	82	3100	Triode No. 1	5814	
6EV7	6.3 EV-2103-0	20	82	3100	Triode No. 2	5814	
6EW6	6.3 JR-3562-7	23	72	2100	Triode No. 1	5823	
6EW7	6.3 EV-7608-0	34	64	1500	Triode No. 1	5824	
6EW7	6.3 EV-2108-0	52	93	7000	Triode No. 2	5825	
6EX6	6.3 JR-5073-0	53	91	7000	Cap=P	5829	
6EY6	6.3 JR-5347-0	30	87	4400	Cap=G	5838	
6EZ5	6.3 JR-5347-0	49	74	2000	Triode No. 1	5839	
6EZ8	6.3 FU-9800-0	21	83	3350	Triode No. 2	5839	
6EZ8	6.3 FU-7600-0	21	83	3350	Triode No. 3	5839	
6EZ8	6.3 FU-2301-0	10	83	3350	Triode No. 3	5839	
6F4	6.3 JR-2306-0	30	92	6000	Cap=G	5840	
6F6	6.3 JR-0407-2	12	52	1000	Cap=G	5844	
6F6	6.3 JR-5347-2	29	73	2000	Pent. Sect. Cap=G	5844	
6F7	6.3 JR-0236-5	28	55	1100	Triode Sect.	5851	
6F7	6.3 JR-5436-2	28	0	500	Triode No. 1	5852	
6F8	6.3 JR-5607-0	23	73	2000	Triode No. 2	5852	
6F8	6.3 JR-0304-0	23	73	2000	Cap=G	5854	
6FA7	6.3 EV-7986-1	18	48	1100	Tetrode No. 1	5875	
6FA7	6.3 EV-7186-9	18	48	1100	Tetrode No. 2	5878	
6FA7	6.3 EV-9306-1	0	0	4700	Diode Sect.	5886	
6FE5	6.3 JR-5347-0	34	90	3100	Pent. Sect.	5896	
6FG5	6.3 JR-3567-0	11	82	2900	Triode Sect.	5897	
6FG7	6.3 EV-9678-0	17	83	3100	Triode Sect.	5899	
6FG7	6.3 EV-1203-0	25	84	3100	Triode Sect.	5902	
6FH5	6.3 JR-2507-0	15	88	4900	Cap=P	5903	
6FH6	6.3 JR-5047-0	32	90	6000	TETRODE PLATE NO. 1	5903	
6FH8	6.3 EV-6970-0	13	55	1150	TETRODE PLATE NO. 2	5904	
6FH8	6.3 EV-6870-0	10	27	700	TETRODE PLATE NO. 3	5906	
6FH8	6.3 EV-6170-0	10	27	700	Triode Sect.	5907	
6FH8	6.3 EV-2300-0	10	68	1650	Triode Sect.	5910	
6FM8	6.3 EV-8907-0	11	56	1200	Diode No. 1	5910	
6FM8	6.3 EV-0601-0	0	50	2500	Diode No. 2	5910	
6FM8	6.3 EV-0203-0	0	50	2150		5910	
6FO5	6.3 JR-2507-0	27	78	2500		5910	
6FS5	6.3 JR-3567-0	23	75	2000		5910	
6FW6	6.3 JR-2567-2	24	73	2000		5910	



6FM8	6.3 EV-8907-0	1200	Triode Sect.	5905	25.0DW-1572-0	35	48	P4	1000	
6FM8	6.3 EV-0601-0	50	Diode No. 1	5906	25.0DW-1572-0	23	73	P4	2000	
6FM8	6.3 EV-0203-0	50	Diode No. 2	5907	25.0DW-1572-0	36	56	P4	1200	
6FO5	6.3 JR-2507-0	27		5908	25.0DW-1572-4	40	48	P4	1000	
6FS5	6.3 JR-3567-0	23		5910	1.5 DX-6210-0	19	27	P4	700	
6FV6	6.3 JR-3567-2	24		5915	6.3 JR-7562-3	20	56	P4	1200	Ampl. Sect.
6FV8	6.3 EV-9678-0	17	Pent. Sect.	5916	6.3 JR-3562-7	10	65	P4	1500	Osc. Sect.
6FW5	6.3 EV-1203-0	23	Triode Sect.	5916	25.0DW-1572-4	22	59	P4	1300	
6FW8	6.3 JR-2573-0	50		5930	2.5 JR-3200-0	67	82	P4	3000	
6FW8	6.3 EV-7608-0	20	Triode No. 1	5931	5.0 HR-0600-0	0	35	P3*	5000	Plate No. 1
6FY8	6.3 EV-2103-0	20	Triode No. 2	5931	5.0 HR-0400-0	0	30	P3*	5000	Plate No. 2
6FY8	6.3 EV-3672-0	32	Pent. Sect.	5932	6.3 JR-5347-2	23	88	P4	3600	Cap-P
6FY8	6.3 EV-1908-0	27	Triode Sect.	5933	6.3 JR-3024-0	33	85	P4	2200	Triode No. 1
6GB	6.3 JR-5347-0	23		5953	12.6 EV-7608-0	24	75	P4	2200	Triode No. 2
6GC5	6.3 EV-8917-0	30		5953	12.6 EV-2103-0	24	75	P4	3000	Triode No. 1
6GEB	6.3 EV-8917-0	23	Pent. Sect.	5964	6.3 JR-5207-6	24	81	P4	3000	Triode No. 2
6GEB	6.3 EV-3602-0	58	Triode Sect.	5964	6.3 JR-6307-5	24	81	P4	3000	Triode No. 1
6GHB	6.3 EV-2637-0	13	Pent. Sect.	5965	12.6 EV-7608-1	24	81	P4	3000	Triode No. 2
6GHB	6.3 EV-9108-0	12	Triode Sect.	5965	12.6 EV-2103-6	24	81	P4	3000	Triode No. 1
6GK5	6.3 JR-2507-6	27		5967	1.1 ES-6801-3	39	48	P4	1000	Triode No. 1
6GK6	6.3 EV-2781-3	10		5967	1.1 ES-3108-6	39	48	P4	1000	Triode No. 2
6GM6	6.3 JR-3562-7	23	Pent. Sect.	5971	1.1 FT-2100-0	20	59	P4	1300	
6GN8	6.3 EV-7986-0	20	Triode Sect.	5975	6.3 EV-3102-0	34	79	P4	2700	
6GN8	6.3 EV-2301-0	22		5977	6.3DW-1805-3	40	73	P4	2000	
6GS8	6.3 EV-7821-9	0	Pent. No. 1	5987	6.3DW-1205-0	74	71	P4	1850	
6GS8	6.3 EV-7321-6	0	Pent. No. 2	5992	6.3 JR-5347-0	21	84	P4	3500	
6GW6	6.3 JR-5047-0	60	Cap-P	5993	6.3 DX-0905-1	0	35	P3*		Plate No. 1
6GY8	OFF EV-0607-0	Use this setting for short check only.		5993	6.3 DX-0105-9	0	35	P3*		Plate No. 2
6GY8	OFF FU-3908-0	Use this setting for short check only.		5995	6.3 ET-0105-0	0	55	P3*	3700	Leads -1-3-4-5
6GY8	6.3 EV-0607-0	0	Triode No. 1, sheet on 3	6005	6.3 JR-3562-0	21	85	P4		See over for see scale.
6GY8	6.3 FU-3908-0	27	Triode No. 2, sheet on 3	6007	1.1 DV-4210-0	20	0	P1*		See over for see scale.
6GY8	6.3 FU-1200-0	34	Triode No. 3	6008	0.6 DV-4210-0	24	0	P1*		Strikes at about 35
6H5	6.3 JR-5403-0		Eye Open	6012	6.3 JR-3502-7	92	78	P4	2500	Triode No. 1
6H5	6.3 JR-5423-0		Eye Closed	6021	6.3DW-7805-0	25	78	P4	2500	Triode No. 2
6H6	6.3 JR-0507-0	0	Diode No. 1	6021	6.3DW-2104-0	25	78	P4	2700	
6H6	6.3 JR-0304-0	0	Diode No. 2	6026	6.3 EV-7803-0	32	79	P4	1500	
6HJ8	6.3 EV-2631-9	20	Pent. Sect.	6028	20.0 JR-3562-0	24	65	P4	2000	
6HJ8	6.3 EV-0807-0	0	Diode Sect.	6050	1.1 CU-3100-0	34	73	P4	1000	
6HS8	6.3 EV-7821-9	10	Pent. No. 1	6052	1.1 ES-3100-0	36	49	P4		
6HS8	6.3 EV-7321-6	10	Pent. No. 2	6052	6.3DW-0507-4	0	60	P3*		Plate No. 1
6J4	6.3 JR-3702-0	24		6052	6.3DW-0102-4	0	60	P3*		Plate No. 2
6J5	6.3 JR-5307-0	23		6055	25.0DW-1805-0	43	48	P4	1000	Triode No. 1
6J6	6.3 JR-5207-0	20	Triode No. 2	6072	12.6 EV-7608-0	15	58	P4	1250	Triode No. 2
6J6	6.3 JR-6307-0	20	Triode No. 1	6072	12.6 EV-2103-0	15	58	P4	3400	Triode No. 1
6J7	6.3 JR-0347-5	22	Cap-G	6080	7.5 JX-4506-1	100	83	P4	3400	Triode No. 2
6B8	6.3 JR-5347-6	18	Heptode Cap-G	6082	7.5 JX-2103-6	100	83	P4	3400	Triode No. 1
6B8	6.3 JR-5647-3	30	Triode	6082	25.0 JX-4506-1	100	83	P4	3400	Triode No. 2
6K4	6.3 DU-2105-0	39		6082	25.0 JX-2103-6	100	83	P4	3400	Triode No. 1
6K5	6.3 JR-5347-0	34	Cap-G	6084	6.3 EV-9613-8	20	63	P4	1300	Triode No. 2
6K7	6.3 JR-0347-6	19		6085	12.6 EV-7608-0	11	78	P4	2500	Triode No. 1
6K8	6.3 JR-5347-6	11	Hexode Cap-G	6085	12.6 EV-2103-0	11	78	P4	2500	Triode No. 2
6K8	6.3 JR-6647-3	0	Triode	6086	20.0 EV-2513-9	20	87	P4	4500	
6L4	6.3 JR-2306-0	34		6087	5.0 HR-0600-0	0	30	P3*		Plate No. 1
6L5	6.3 JR-5307-0	27		6087	5.0 HR-0400-0	0	30	P3*		Plate No. 2
6L6	6.3 JR-5347-2	23		6088	1.1 DV-4120-0	34	0	P5*		
6L7	6.3 JR-0347-5	23	Cap Grid Cap-G	6094	6.3 DV-1428-0	21	85	P4	3700	
6L7	6.3 JR-5347-2	27	Pin Grid	6096	6.3 JR-3562-0	24	65	P4	1500	
6M3	6.3 HR-0003-0	0	Cap-P, see extra sheet on 1	6097	6.3 JR-0703-0	0	61	P1*		Diode No. 1
6N4	6.3 JR-3502-0	18		6097	6.3 JR-0205-0	0	61	P1*		Diode No. 2
6N7	6.3 JR-5607-3	12		6098	6.3 GX-9858-0	34	89	P4	5400	



Reworked by PAØPGA

This manual was downloaded from BAMA's boatanchor site <http://bama.sbc.edu>







6X5	6.3 JR-0307-2	0	35	P3*	3000	Plate No. 2	6680	12.6 EV-2103-0	24	75	P4	2200	Triode No. 2
6X8	6.3 EV-7986-1	10	81	P4	3000	Pent. Sect.	6681	12.6 EV-7608-0	12	58	P4	1250	Triode No. 1
6X8	6.3 EV-2386-1	20	81	P4	3000	Triode Sect.	6681	12.6 EV-2103-0	12	58	P4	1250	Triode No. 2
6Y6	6.3 JR-5847-0	44	80	P4	6000		6690	6.3 DW-7508-0	22	78	P4	2500	Triode No. 1
6Z4	6.3 JR-0304-0	0	35	P3*		Plate No. 1	6690	6.3 DW-2104-0	22	78	P4	2500	Triode No. 2
6Z4	6.3 JR-0204-0	0	35	P3*		Plate No. 2	6754	6.3 EV-0907-0	0	65	P3*		Plate No. 1
6ZY5	6.3 JR-0507-0	0	30	P3*		Plate No. 1	6754	6.3 EV-0103-0	0	65	P3*		Plate No. 2
6ZY5	6.3 JR-0307-0	0	30	P3*		Plate No. 2	6788	6.3 DW-1572-0	25	0	P4	550	
7A4	6.3 JR-6207-0	23	73	P4	2000		6814	6.3 DW-1805-0	31	79	P4	2450	
7A5	6.3 JR-6237-0	28	87	P4	6000		6829	12.6 EV-7608-0	24	81	P4	3000	Triode No. 1
7A6	6.3 JR-0607-5	0	49	P1*		Diode No. 1	6829	12.6 EV-2103-0	24	81	P4	3000	Triode No. 2
7A6	6.3 JR-0302-5	0	49	P1*		Diode No. 2	6832	6.3 DW-7605-0	30	50	P4	1050	Triode No. 1
7A7	6.3 JR-6237-4	27	71	P4	1750		6832	6.3 DW-2104-0	30	50	P4	1050	Triode No. 2
7A8	6.3 JR-6207-4	20	50	P4	1000	Ampl. Sect.	6877	6.3 DV-1408-0	59	87	P4	4300	
7A8	6.3 JR-4357-6	20	0	P4	500	Osc. Sect.	6883	12.6 JR-5032-7	28	91	P4	7000	Cap = P
7AD7	6.3 JR-6237-4	10	90	P4	6200		6887	6.3 JR-0703-0	0	59	P1*		Diode No. 1
7AF7	6.3 JR-5607-0	21	79	P4	2600	Triode No. 1	6887	6.3 JR-0205-0	0	59	P1*		Diode No. 2
7AF7	6.3 JR-4302-0	21	79	P4	2600	Triode No. 2	6888	6.3 JR-4765-3	30	77	P4	2350	
7AG7	6.3 JR-6237-4	0	82	P4	3000		6919	6.3 JR-0703-6	0	61	P1*		Diode No. 1
7AH7	6.3 JR-6237-4	0	83	P4	3300		6919	6.3 JR-0205-6	0	61	P1*		Diode No. 2
7AK7	6.3 JR-6237-4	0	85	P4	4000		6943	6.3 DW-1572-4	21	73	P4	2100	
7AU7	6.3 EV-7608-0	24	75	P4	2200	Triode No. 1	6944	6.3 DW-1572-4	21	73	P4	2100	
7AU7	6.3 EV-2103-0	24	75	P4	2200	Triode No. 2	6945	6.3 DW-1572-0	44	83	P4	3200	
7B4	6.3 JR-6207-0	12	82	P4	1000		6946	6.3 DW-1805-0	29	80	P4	3000	
7B7	6.3 JR-6237-4	27	70	P4	1700		6954	6.3 JR-3562-7	13	73	P4	2000	
7C6	6.3 JR-6237-0	30	82	P4	3000		6973	6.3 EV-3917-0	20	87	P4	4800	
7C6	6.3 JR-0607-2	10	18	P4	600	Triode Sect.	7025	12.6 EV-7608-0	12	58	P4	1250	Triode No. 1
7C6	6.3 JR-0607-2	10	18	P4	600	Diode No. 1	7025	12.6 EV-2103-0	12	58	P4	1250	Triode No. 2
7C6	6.3 JR-0507-2	10	0	P1*		Diode No. 2	7027	6.3 JR-5327-0	23	88	P4	5000	
7D7	6.3 JR-6237-4	22	60	P4	1300		7036	6.3 JR-7562-3	20	56	P4	1200	Ampl. Sect.
7E6	6.3 JS-1304-0	15	82	P4	3000		7036	6.3 JR-3562-7	10	65	P4	1500	Osc. Sect.
7E6	6.3 JR-3207-0	18	72	P4	1900	Triode Sect.	7044	12.6 EV-7906-0	28	90	P4	6500	Triode No. 1
7E6	6.3 JR-0607-2	18	0	P1*		Diode No. 1	7044	12.6 EV-2103-0	28	90	P4	6500	Triode No. 2
7E6	6.3 JR-0507-2	18	0	P1*		Diode No. 2	7054	12.6 EV-2781-3	13	90	P4	6000	
7E7	6.3 JR-0407-2	22	60	P4	1300	Pent. Sect.	7055	12.6 JR-0703-6	0	61	P1*		Diode No. 1
7E7	6.3 JR-0407-2	22	0	P1*		Diode No. 1	7055	12.6 JR-0205-6	0	61	P1*		Diode No. 2
7E7	6.3 JR-0307-2	22	0	P1*		Diode No. 2	7056	12.6 JR-3562-7	22	76	P4	2200	
7EY6	7.5 JR-5347-0	30	87	P4	4400		7057	12.6 EV-7608-9	18	88	P4	5000	Triode No. 1
7F7	6.3 JR-5607-3	0	60	P4	1300	Triode No. 1	7057	12.6 EV-2103-9	18	88	P4	5000	Triode No. 2
7F7	6.3 JR-4302-6	0	60	P4	1300	Triode No. 2	7058	12.6 EV-7908-0	12	58	P4	1250	Triode No. 1
7F8	6.3 HS-8605-0	10	86	P4	4000	Triode No. 1	7058	12.6 EV-2103-0	12	58	P4	1250	Triode No. 2
7F8	6.3 HS-1304-0	10	86	P4	4000	Triode No. 2	7059	12.6 EV-2637-0	15	76	P4	2250	Pent. Sect.
7G7	6.3 JR-6237-4	18	73	P4	2000		7059	12.6 EV-9108-0	16	87	P4	4500	Triode Sect.
7H7	6.3 JR-6237-4	10	82	P4	3000		7060	12.6 EV-8679-0	18	83	P4	3000	Pent. Sect.
7J7	6.3 JR-6267-4	18	38	P4	800	Heptode Sect.	7060	12.6 EV-2103-0	22	76	P4	2200	Triode Sect.
7J7	6.3 JR-4367-6	18	51	P4	1000	Triode Sect.	7061	12.6 EV-3917-0	21	85	P4	3700	
7K7	6.3 JR-4302-0	0	50	P4	1000	Triode Sect.	7119	12.6 EV-7906-0	20	93	P4	10000	Triode No. 1
7K7	6.3 JR-0607-0	0	0	P1*		Diode No. 1	7119	12.6 EV-2103-0	20	93	P4	10000	Triode No. 2
7L7	6.3 JR-6237-4	0	0	P1*		Diode No. 2	7167	12.6 JR-3562-0	23	81	P4	3000	
7N7	6.3 JR-5607-3	12	73	P4	2000		7189	6.3 EV-2793-0	14	92	P4	8000	
7N7	6.3 JR-4302-6	23	73	P4	2000	Triode No. 1	7189	6.3 EV-7236-0	10	86	P4	3500	Pent. Sect.
7O7	6.3 JR-6237-4	21	0	P4	500	Ampl. Sect.	7199	6.3 EV-9108-0	30	76	P4	2100	Triode Sect.
7O7	6.3 JR-4237-6	21	40	P4	800	Osc. Sect.	7233	6.3 EV-2908-0	10	0	P3*		Diode No. 1
7R7	6.3 JR-6267-0	10	82	P4	3000	Pent. Sect.	7247	12.6 EV-7608-0	12	58	P4	1250	Triode No. 1
7R7	6.3 JR-0407-2	10	0	P1*		Diode No. 1	7247	12.6 EV-2103-0	24	75	P4	2200	Triode No. 2
7R7	6.3 JR-0307-2	10	0	P1*		Diode No. 2	7258	12.6 EV-8679-1	15	84	P4	3500	Pent. Sect.
7V7	6.3 JR-6237-4	6	86	P4	4000		7258	12.6 EV-2173-6	19	87	P4	4400	Triode Sect.
7W7	6.3 JR-6237-5	11	82	P4	3000		7355	6.3 JR-6375-0	19	91	P4	7600	
7X6	6.3 JR-0607-5	0	55	P3*		Plate No. 1	7360	6.3 EV-3621-9	23	48	P4	1100	CONNECT PIN 1 TO PIN 3 AND PIN 4 TO PIN 1 ON LOCAL
7X6	6.3 JR-0307-5	0	55	P3*		Plate No. 2	7370	20.0 FY-7906-0	29	88	P4	5000	Triode No. 1





8GN8	7.5	EV-7986-0	20	89	P4	5500	Pent. Sect.
8GN8	7.5	EV-2301-0	22	45	P4	950	Triode Sect.
8SN7	7.5	JX-4506-1	23	73	P4	2000	Triode No. 1
8SN7	7.5	JX-2103-5	23	73	P4	2000	Triode No. 2
9AU7	10.0	EV-7608-0	24	75	P4	2200	Triode No. 1
9AU7	10.0	EV-2103-0	24	75	P4	2200	Triode No. 2
9BR7	10.0	EV-2103-0	10	86	P4	4000	Triode Sect.
9BR7	10.0	EV-0786-0	0	56	P1*	.....	Diode No. 1
9BR7	10.0	EV-0608-0	0	56	P1*	.....	Diode No. 2
9CL8	10.0	EV-9678-0	12	81	P4	3000	Tetrode Sect.
9CL8	10.0	EV-1203-0	12	87	P4	4500	Triode Sect.
9DZ8	10.0	EV-3672-0	29	89	P4	5500	Pent. Sect.
9DZ8	10.0	EV-1908-0	25	0	P4	500	Triode Sect.
9U8	10.0	EV-2637-0	15	76	P4	2250	Pent. Sect.
9U8	10.0	EV-9108-0	16	87	P4	4500	Triode Sect.
9X8	10.0	EM-7986-1	10	81	P4	3000	Pent. Sect.
9X8	10.0	EV-2336-1	20	81	P4	3000	Triode Sect.
10BQ5	10.0	EV-2793-0	13	91	P4	7500	
10C8	10.0	EV-8679-0	17	81	P4	3000	Pent. Sect.
10C8	10.0	EV-2103-0	21	73	P4	2000	Triode Sect.
10DA7	10.0	EV-7608-0	23	79	P4	2600	Triode No. 1
10DA7	10.0	EV-3109-0	55	88	P4	4700	Triode No. 2
10DE7	10.0	EV-7608-0	35	50	P4	1300	Triode No. 1
10DE7	10.0	EV-2103-0	54	88	P4	6500	Triode No. 2
10DR7	10.0	EV-7608-0	16	43	P4	900	Triode No. 1
10DR7	10.0	EV-2109-0	55	89	P4	5400	Triode No. 2
10EG7	10.0	JX-4606-0	30	73	P4	2800	Triode No. 1
10EG7	10.0	JX-2103-0	55	91	P4	7500	Triode No. 2
10EW7	10.0	EV-7608-0	34	64	P4	1500	Triode No. 1
10EW7	10.0	EV-2109-0	52	93	P4	7000	Triode No. 2
11C5	10.0	JR-2783-0	34	88	P4	4500	
11CY7	10.0	EV-7608-0	23	0	P4	500	Triode No. 1
11CY7	10.0	EV-2103-0	54	86	P4	4000	Triode No. 2
12A4	12.6	EV-2901-0	31	88	P4	5000	
12A7	12.6	JR-0886-5	48	48	P4	975	Pent. Sect. Cap-6
12A7	12.6	JR-0804-2	0	40	P3*	.....	Rect. Sect.

THE HICKOK ELECTRICAL INSTRUMENT COMPANY—CLEVELAND, OHIO  
COPYRIGHT 1961

**STOP**

3-1-61

MODEL 532-533-533DM-534

**NOTE:** When testing the 1V2 tube, make **LINE TEST** at 1000 instead of 1500 and set filament switch on 1.1. Tubes should read above **DIODES** OK.

When testing the 19J6 tube with the 532-534 tube testers, use 1250 for **LINE TEST** instead of 1500. Set filament switch on 25. Set Bias on 25. That will reduce the filament voltage to 20 volts.

When testing 19T8 tube with the 532-534 tube testers, use 1250 for **LINE TEST** instead of 1500. Set filament switch on 25. Set Bias on 0. That will reduce the filament voltage to 20 volts.

When testing the 196G6 tubes with testers not having 20 volt Fil. Tap set **FIL.** on 25 volts and make **LINE TEST** with meter pointer on (?).

A dagger † in the **FIL.** column means that on tube testers not having the 0.6 volt filament tap the filament switch should be set on 1.1 and **LINE TEST** made at 1100 on the 3000 scale. The **MICROMHOS** switch should be set on English.

**SUBMINIATURE TUBES:**

**ROUND**—Leads are numbered in a clockwise direction and Lead No. 1 is identified by an arrow on the side of the tube.

**FLAT**—Lead No. 1 is identified by a red dot.

**STOP**

3-1-61

534A-534B-600 TUBE 7





# K4XL's BAMA

This manual is provided free of charge from the "Boatanchor Manual Archive", as a service to the Boatanchor community. It was uploaded by someone who wanted to help you repair and maintain your equipment.

If you paid anyone other than **BAMA** for this manual, you paid someone who is making a profit from the free labor of others, without asking their permission


You may pass on copies of this manual to anyone who needs it. But do it without charge.

Thousands of files are available without charge from **BAMA**. Visit us at: <http://bama.sbc.edu>

**Real radio's have tubes!  
Keep them glowing !!**

File credits:

**Ross Stovall**

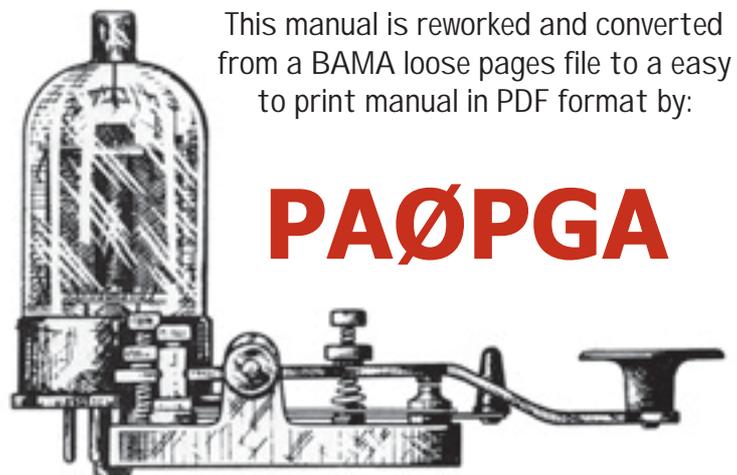

This manual is reworked and converted from a BAMA loose pages file to a easy to print manual in PDF format by:

**PAØPGA**



Reworked by  
**PAØPGA**

This manual was downloaded from **BAMA's** boatanchor site <http://bama.sbc.edu>

