
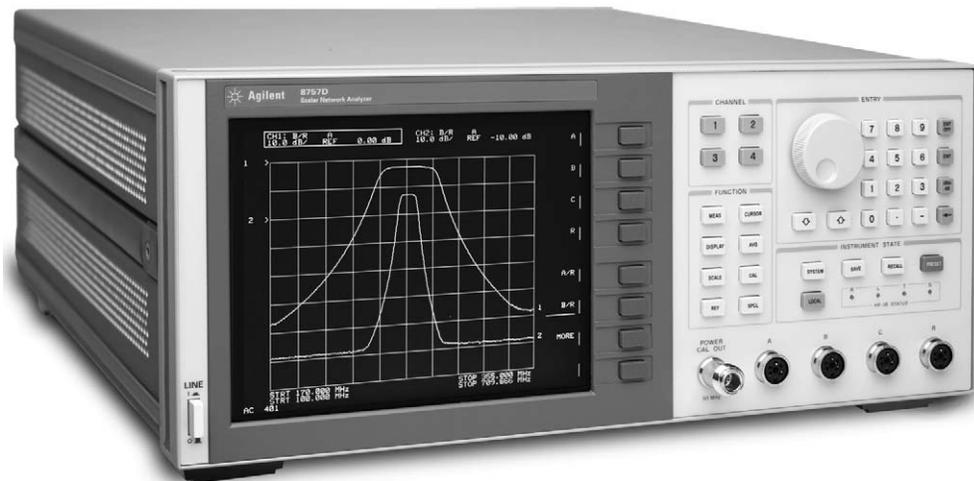


# Agilent 8757D Scalar Network Analyzers

## Configuration Guide

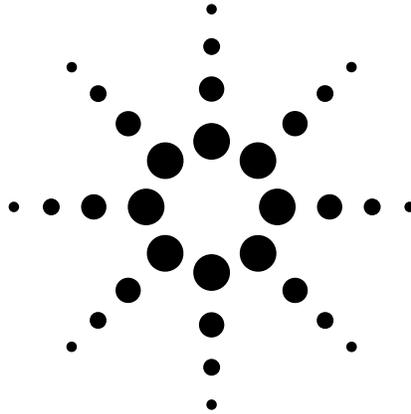

Optimize your scalar analysis system to meet your specific measurement requirements. The Agilent 8757D measurement features provide greater system versatility and measurement throughout. This network analyzer forms the basis of a complete Agilent scalar measurement system. System components may be ordered separately, or as a complete package. The basic components of any scalar system include a scalar analyzer, a swept source, a directional bridge or coupler, and detectors. Other accessories such as a plotter, printer, or disk drive can be added to make a complete manual measurement system.

## Agilent 8757D Scalar Network Analyzers

### Test set options

- **8757D-700** standard test set
- **8757D-001** add fourth detector input
- **8757D-002** add internal power calibrator and a Type-N (m) to 3.5 (f) adapter
- **8757D-012** add fourth detector and internal power calibrator

### Kit for rack flanges

- **8757D-908** add rack flange kit for instruments without handles
- **8757D-913** add rack flange kit for instruments with handles

### Documentation


- **8757D-910** add extra manual set

Service options are available

## Coaxial System Configurations

The following configurations allow scalar network analyzer measurements in the indicated frequency ranges and connector types. Ratioing is recommended for all configurations, since it improves the effective source match by removing the effects of source power variations versus frequency. When ratio measurements are not desired, the power splitter and one detector may be removed from the system. See Figure 1 for a block diagram of a basic scalar measurement system.

Other adapters might be necessary if the connectors of the device under test do not mate with the test port connectors. The test port connectors are documented for each of the configured systems below. Adapter ordering information is provided in the ordering guide on page six.

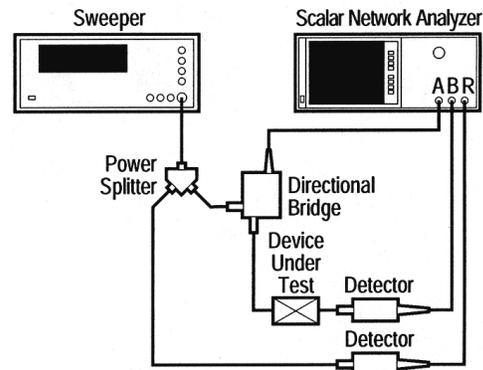

**Figure 1. Basic scalar coaxial system, configured for ratio reflection and transmission measurements**

### Coaxial system configurations by frequency range and connector type

Frequency range	0.01 to 18 GHz	0.01 to 20 GHz	0.01 to 26.5 GHz	0.01 to 40 GHz	0.01 to 50 GHz
Connector type	Type-N	3.5 mm	3.5 mm	2.4 mm	2.4 mm
Analyzer	8757D	8757D	8757D	8757D	8757D
Synthesized sweeper <sup>2</sup>	E8257D with Options 520, 007, IED	E8257D with Options 520, 007	E8257D with Options 540, 007 2.4mm (f) to 3.5mm (m) adapter	E8257D with Options 540, 007	E8257D with Options 550, 007
Synthesized sweeper (discontinued)	83620B with Option C01, or 83752A with Option 1ED	83620B or 83752A	83630B/L	83640B/L	83650B/L
Detector All have male connectors	85025A	85025E	85025E	85025D	85025D
Directional bridge Test port type Through adapter	85027C Type-N (f) N/A	85027E 3.5 mm (m) Included with bridge	85027E 3.5 mm (m) Included with bridge	85027D 2.4 mm (m) 11900B 2.4 mm (f) to (f)	85027D 2.4 mm (m) 11900B 2.4 mm (f) to (f)
Power splitter <sup>1</sup> Adapter <sup>1</sup> (power splitter to bridge)	11667A Option 001 Included with bridge	11667B  Part No. 1250-1748 3.5 mm (m) to (m)	11667B  Part No. 1250-1748 3.5 mm (m) to (m)	11667C  11900A 2.4 mm (m) to (m)	11667C  11900A 2.4 mm (m) to (m)
Reference detector <sup>1</sup>	85025A	85025E	85025E	85025D	85025D
System cable kit	85022A	85022A	85022A	85022A	85022A

Note: Shaded items above have been discontinued.

1. These accessories required for ratio measurements only.  
2. For higher output power and dynamic range, add option IEA to the E8247C/57C PSG Signal Generator.

## Basic Measurement System Components

### Sources

- **E8257D (Option 520, 007)** 250 kHz to 20 GHz synthesized sweeper with analog and pulse modulation
- **E8257D (Option 540, 007)** 250 kHz to 40 GHz synthesized sweeper with analog and pulse modulation
- **E8257D (Option 550, 007)** 250 kHz to 50 GHz synthesized sweeper with analog and pulse modulation

(for high output add option IEA)

Extended service options available.

### Directional bridges<sup>1</sup>

The following operate in AC or DC detection modes.

- **85027A** 0.01 to 18 GHz, 7 mm
- **85027B** 0.01 to 26.5 GHz, 3.5 mm (f)
- **85027C** 0.01 to 18 GHz, Type-N (f)
- **85027D** 0.01 to 50 GHz, 2.4 mm (m)
- **85027E** 0.01 to 26.5 GHz, 3.5 mm (m)

### Precision detectors (For use with the 8757D only)

- **85037A** 0.01 to 18 GHz, type-N (m)  
**85037A-001** 7-mm connector  
(A Type-N (m) to 7-mm adapter is included to calibrate the 85037A-001 precision detector via the 8757D-002 internal power calibrator.)
- **85037B** 0.01 to 26.5 GHz, 3.5 mm (m)

### Detectors

- **85025A** 0.01 to 18 GHz, Type-N (m)  
**85037A-001** 7-mm connector
- **85025B** 0.01 to 26.5 GHz, 3.5 mm (m)
- **85025D** 0.01 to 50 GHz, 2.4 mm (m)
- **85025E** 0.01 to 26.5 GHz, 3.5 mm (m) with improved return loss

### Detector adapters

- **85025C** SMA (m), AC or DC detection

### Power splitters<sup>1</sup>

- **11667A** DC to 18 GHz, all connectors Type-N (f)  
**1167A-001** Type-N (m) input connector  
**1167A-002** 7-mm output connectors
- **11667B** DC to 26.5 GHz, 3.5 mm (f)
- **11667C** DC to 50 GHz, 2.4 mm (f)

### Power dividers<sup>1</sup>

- **11636A** DC to 18 GHz, Type-N (f)
- **11636B** DC to 26.5 GHz, 3.5 mm (f)

### Waveguide detectors

- **R85026A** 26.5 to 40 GHz, WR-28
- **Q85026A** 33 to 50 GHz, WR-22
- **U85026A** 40 to 60 GHz, WR-19
- **85025CK-K57** 50 to 75 GHz, WR-15, must order with 85025C
- **85025CK-K71** 75 to 110 GHz, WR-10, must order with 85025C

### Waveguide accessories

- **Part No. 11644-20015** V/W fixed short, WR-15/10
- **Part No. 85043-80013** anti-static mat
- **Part No. 11644-20004** Q/U fixed short, WR-22/19
- **Part No. 11644-20005** R fixed short, WR-28

1. Connector types refer to the test port (or output) connector unless otherwise specified.

## Other Measurement Accessories

### Standards

- **909A** 50 ohm termination, 7 mm  
**Option 012** 50 ohm termination, Type-N (m)
- **909D** 50 ohm termination, 3.5 mm (m)  
**Option 011** 50 ohm termination, 3.5 mm (f)
- **8490D** Option 010 50 ohm 10 dB pad, 2.4 mm (m)
- **8491B** Option 010 50 ohm 10 dB pad, Type-N (m)
- **8492A** Option 010 50 ohm 10 dB pad, 7 mm
- **8493C** Option 010 50 ohm 10 dB pad, 3.5 mm (m)
- **85138A** 50 ohm termination, 2.4 mm (m)
- **85138B** 50 ohm termination, 2.4 mm
- **85140A** short, 2.4 mm (m)
- **85141A** open, 2.4 mm (m)
- **85141B** open, 2.4 mm (f)
- **Part No. 1250-1530** 75 ohm short, Type-N (m)
- **Part No. 1250-1532** 75 ohm termination, Type-N (m)
- **Part No. 85021-60001** open/short, 7 mm
- **Part No. 85027-60004** open/short, 3.5 mm (f)
- **Part No. 85032-60001** 50 ohm open, Type-N (m)
- **Part No. 85037-60001** open/short, 3.5 mm (m)

### Other accessories

- **11613B** calibrator
- **11679A** 7.6 m (25 ft) extension cable
- **11679B** 61 m (200 ft) extension cable
- **11852B** 50/75 ohm minimum loss pad
- **85022A** system cable kit
- **Disk drive** Agilent no longer offers Option 802, the 9122C disk drive. 8757D/E compatible disk drives are available from ISA, Inc. In the U.S., contact Saaya, Inc. (formerly known as ISA, Inc.). Elsewhere, contact ISA Company, Ltd at [www.isa-j.co.jp/](http://www.isa-j.co.jp/)

## Upgrade Kits

- **Hardware upgrades**  
**86383C** 8757D upgrade kit<sup>1</sup>  
 (order one or both of the following options)
  - **86383C-001** modifies 8757D to include 8757D-001 (fourth detector input)
  - **86383C-002** modifies 8757D to include 8757D-002 (internal power calibrator)

### Adapters

- **R281A** 2.4 mm (f) to WR-28
- **R281B** 2.4 mm (m) to WR-28
- **Q281A** 2.4 mm (f) to WR-22
- **Q281B** 2.4 mm (m) to WR-22
- **11900A** 2.4 mm (m) to (m)
- **11900B** 2.4 mm (f) to (f)
- **11900C** 2.4 mm (m) to (f)
- **Part No. 1250-1745** Type-N (m) to (m)
- **Part No. 1250-1743** 3.5 mm (m) to Type-N (m)
- **Part No. 1250-1746** 7 mm to 3.5 mm (m)
- **Part No. 1250-1747** 7 mm to 3.5 mm

### Directional bridge connector savers

- **Part No. 85027-60002** 3.5 mm (m) to (m)  
 (For use with the 85027B directional bridge only)
- **Part No. 85027-60003** 3.5 mm (m) to (f)  
 (For use with the 85027B directional bridge only)
- **Part No. 85027-60005** 3.5 mm (f) to (f)
- **Part No. 85027-60006** 3.5 mm (f) to (m)
- **Part No. 85027-60007** 3.5 mm (m) to (m)

### Peripherals

For a list of compatible printers, consult our printer-compatibility guide Web page. Its URL location is [www.agilent.com/find/pcg](http://www.agilent.com/find/pcg)


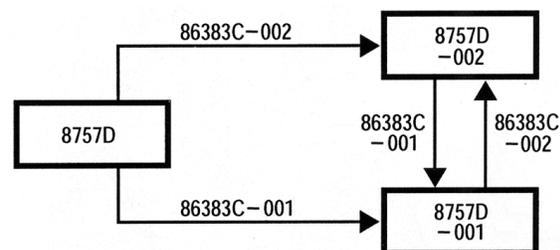


Figure 2. Hardware upgrade paths

## Millimeter-wave System Configurations Based on Discontinued Products

The information below is provided as a reference for users who currently own these products, or those who are considering purchasing them from a used equipment supplier.

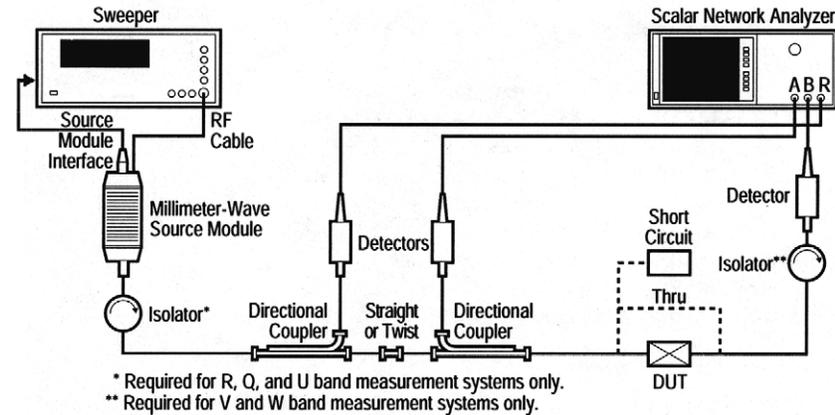

**Figure 3. Block diagram for millimeter-wave ratio transmission and reflection measurements**

### Millimeter-wave system configurations by frequency range and connector type

Frequency range	26.5 to 40 GHz	33 to 50 GHz	40 to 60 GHz	50 to 75 GHz	75 to 110 GHz
Connector type	WR-28 (R band)	WR-22 (Q band)	WR-19 (U band)	WR-15 (V band)	WR-10 (W band)
Analyzer	8757D	8757D	8757D	8757D	8757D
<b>Source</b>					
Synthesized sweeper	E8257D	E8257D	E8257D	E8257D	E8257D
	Options 520, 007, IEA	Options 520, 007, IEA			
Source module (discontinued)	83554A <sup>2</sup>	83555A <sup>2</sup>	83556A <sup>2</sup>	83557A <sup>2</sup>	83558A <sup>2</sup>
<b>Detector</b> (need 3)	R85026A	Q85026A	U85026A	85025CK Option K57 and 85025C	85025CK Option K71 and 85025C
<b>Directional coupler</b> (need 2) (discontinued)	R band (R752C <sup>3</sup> )	Q band (Q752C <sup>3</sup> )	U band (U752C <sup>3</sup> )	V band (V752C <sup>3</sup> )	W band (W752C <sup>3</sup> )
<b>Isolator</b> (discontinued)	R band (R365A <sup>4</sup> )	Q band (Q365A <sup>4</sup> )	U band (U365A <sup>4</sup> )	V band (V365A <sup>4</sup> )	W band (W365A <sup>4</sup> )
<b>Fixed short</b>	11644-20005	11644-20004	11644-20004	11644-20015	11644-20015
<b>Straight or twist</b>	3rd party vendor	3rd party vendor	3rd party vendor	3rd party vendor	3rd party vendor
<b>System cable kit</b>	85022A	85022A	85022A	85022A	85022A

Note: Shaded items above have been discontinued.

1. Installation not included.
2. The Agilent 8355xA source modules have been discontinued as of 2005. However, they are still compatible with this configuration.
3. The Agilent x752C directional couplers have been discontinued as of 2002. However, they are still compatible with this configuration as well as other equivalent products.
4. The Agilent x365A isolators have been discontinued as of 2002. However, they are still compatible with this configuration as well as other equivalent products.

## Literature Guide

- *Agilent 8757D/E scalar network analyzers*, Data Sheet, publication number 5091-2471E
- *Improving network analyzer measurements of frequency-translating devices*, Application Note 1287-7, publication number 5966-3318E
- *Network analyzer measurements: filter and amplifier examples*, Application Note 1287-4, publication number 5965-7710E
- *Microwave component measurements; amplifier measurements using the scalar network analyzer*, Product Note 345-1, publication number 5954-1599
- *Improving scalar network analysis using the PSG signal generator and the 8757D scalar network analyzer*, Application Note 1435, publication number 5988-8432EN

## Web Resources

Visit our Web sites for additional product information and literature.

Scalar Network Analyzers  
[www.agilent.com/find/8757](http://www.agilent.com/find/8757)

RF & MW Network Analyzers  
[www.agilent.com/find/na](http://www.agilent.com/find/na)

Test and Measurement Accessories  
[www.agilent.com/find/accessories](http://www.agilent.com/find/accessories)



## Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products and applications you select.



## Agilent Direct

[www.agilent.com/find/quick](http://www.agilent.com/find/quick)

Quickly choose and use your test equipment solutions with confidence.



## Agilent Open

[www.agilent.com/find/open](http://www.agilent.com/find/open)

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

**LXI** is the US registered trademark of the LXI Consortium.

## Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to [www.agilent.com/find/removealldoubt](http://www.agilent.com/find/removealldoubt)

## www.agilent.com

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office.

The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Phone or Fax

#### United States:

(tel) 800 829 4444  
(fax) 800 829 4433

#### Canada:

(tel) 877 894 4414  
(fax) 800 746 4866

#### China:

(tel) 800 810 0189  
(fax) 800 820 2816

#### Europe:

(tel) 31 20 547 2111

#### Japan:

(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

#### Korea:

(tel) (080) 769 0800  
(fax) (080) 769 0900

#### Latin America:

(tel) (305) 269 7500

#### Taiwan:

(tel) 0800 047 866  
(fax) 0800 286 331

#### Other Asia Pacific Countries:

(tel) (65) 6375 8100

(fax) (65) 6755 0042

Email: [tm\\_ap@agilent.com](mailto:tm_ap@agilent.com)

Revised: 09/14/06

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2002, 2003, 2005, 2006

Printed in USA, September 26, 2006

5967-6177E

