

Operating and Service Manual

**Agilent Technologies
11652A Transmission/Reflection Kit**

**Agilent Technologies
8721A
Directional Bridge**



Agilent Technologies

Manufacturing Part Number: 11652-90002

Printed in USA

Print Date: July 1990

© Agilent Technologies, Inc. 1990



11652-90002

Hewlett-Packard to Agilent Technologies Transition

This manual may contain references to HP or Hewlett-Packard. Please note that Hewlett-Packard's former test and measurement, semiconductor products and chemical analysis businesses are now part of Agilent Technologies. To reduce potential confusion, the only change to product numbers and names has been in the company name prefix: where a product number/name was HP XXXX the current name/number is now Agilent XXXX. For example, model number HP8648 is now model number Agilent 8648.

Documentation Warranty

THE MATERIAL CONTAINED IN THIS DOCUMENT IS PROVIDED "AS IS," AND IS SUBJECT TO BEING CHANGED, WITHOUT NOTICE, IN FUTURE EDITIONS. FURTHER, TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, AGILENT DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED WITH REGARD TO THIS MANUAL AND ANY INFORMATION CONTAINED HEREIN, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. AGILENT SHALL NOT BE LIABLE FOR ERRORS OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, USE, OR PERFORMANCE OF THIS DOCUMENT OR ANY INFORMATION CONTAINED HEREIN. SHOULD AGILENT AND THE USER HAVE A SEPARATE WRITTEN AGREEMENT WITH WARRANTY TERMS COVERING THE MATERIAL IN THIS DOCUMENT THAT CONFLICT WITH THESE TERMS, THE WARRANTY TERMS IN THE SEPARATE AGREEMENT WILL CONTROL.

DFARS/Restricted Rights Notice

If software is for use in the performance of a U.S. Government prime contract or subcontract, Software is delivered and licensed as "Commercial computer software" as defined in DFAR 252.227-7014 (June 1995), or as a "commercial item" as defined in FAR 2.101(a) or as "Restricted computer software" as defined in FAR 52.227-19 (June 1987) or any equivalent agency regulation or contract clause. Use, duplication or disclosure of Software is subject to Agilent Technologies' standard commercial license terms, and non-DOD Departments and Agencies of the U.S. Government will receive no greater than Restricted Rights as defined in FAR 52.227-19(c)(1-2) (June 1987). U.S. Government users will receive no greater than Limited Rights as defined in FAR 52.227-14 (June 1987) or DFAR 252.227-7015 (b)(2) (November 1995), as applicable in any technical data.

Printing Copies of Documentation from the Web

To print copies of documentation from the Web, download the PDF file from the Agilent web site:

- Go to <http://www.agilent.com>.
 - Enter the document's part number (located on the title page) in the **Quick Search** box.
 - Click GO.
 - Click on the hyperlink for the document.
 - Click the printer icon located in the tool bar.
-

OPERATING AND SERVICE MANUAL

**HP 11652A
TRANSMISSION/
REFLECTION KIT**

**HP 8721A
DIRECTIONAL
BRIDGE**



**HEWLETT
PACKARD**

CERTIFICATION

Hewlett-Packard Company certifies that this product met its published specifications at the time of shipment from the factory. Hewlett-Packard further certifies that its calibration measurements are traceable to the United States National Institute of Standards and Technology (NIST, formerly NBS), to the extent allowed by the Institute's calibration facility, and to the calibration facilities of other International Standards Organization members.

WARRANTY

This Hewlett-Packard instrument product is warranted against defects in material and workmanship for a period of one year from date of delivery, or, in the case of certain major components listed in the Operating and Service manual, for the specified period. During the warranty period, Hewlett-Packard Company will, at its option, either repair or replace products which prove to be defective.

For warranty service or repair, this product must be returned to a service facility designated by HP. Buyer shall prepay shipping charges to HP and HP shall pay shipping charges to return the product to Buyer. However, Buyer shall pay all shipping charges, duties, and taxes for products returned to HP from another country.

LIMITATION OF WARRANTY

The foregoing warranty shall not apply to defects resulting from improper or inadequate maintenance by Buyer, Buyer-supplied software or interfacing, unauthorized modification or misuse, operation outside of the environmental specifications for the product, or improper site preparation or maintenance.

NO OTHER WARRANTY IS EXPRESSED OR IMPLIED. HP SPECIFICALLY DISCLAIMS THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

EXCLUSIVE REMEDIES

THE REMEDIES PROVIDED HEREIN ARE BUYER'S SOLE AND EXCLUSIVE REMEDIES. HP SHALL NOT BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, WHETHER BASED ON CONTRACT, TORT, OR ANY OTHER LEGAL THEORY.

ASSISTANCE

Product maintenance agreements and other customer assistance agreements are available for Hewlett-Packard products.

For any assistance, contact your nearest Hewlett-Packard Sales and Service Office. Addresses are provided at the back of this manual.

**HP 11652A
TRANSMISSION/REFLECTION KIT**

**HP 8721A
DIRECTIONAL BRIDGE**

© Copyright HEWLETT-PACKARD COMPANY 1980
1400 FOUNTAINGROVE PARKWAY, SANTA ROSA, CA 95403 U.S.A.

MANUAL PART NO. 11652-90002

Printed: JULY 1990



**HEWLETT
PACKARD**

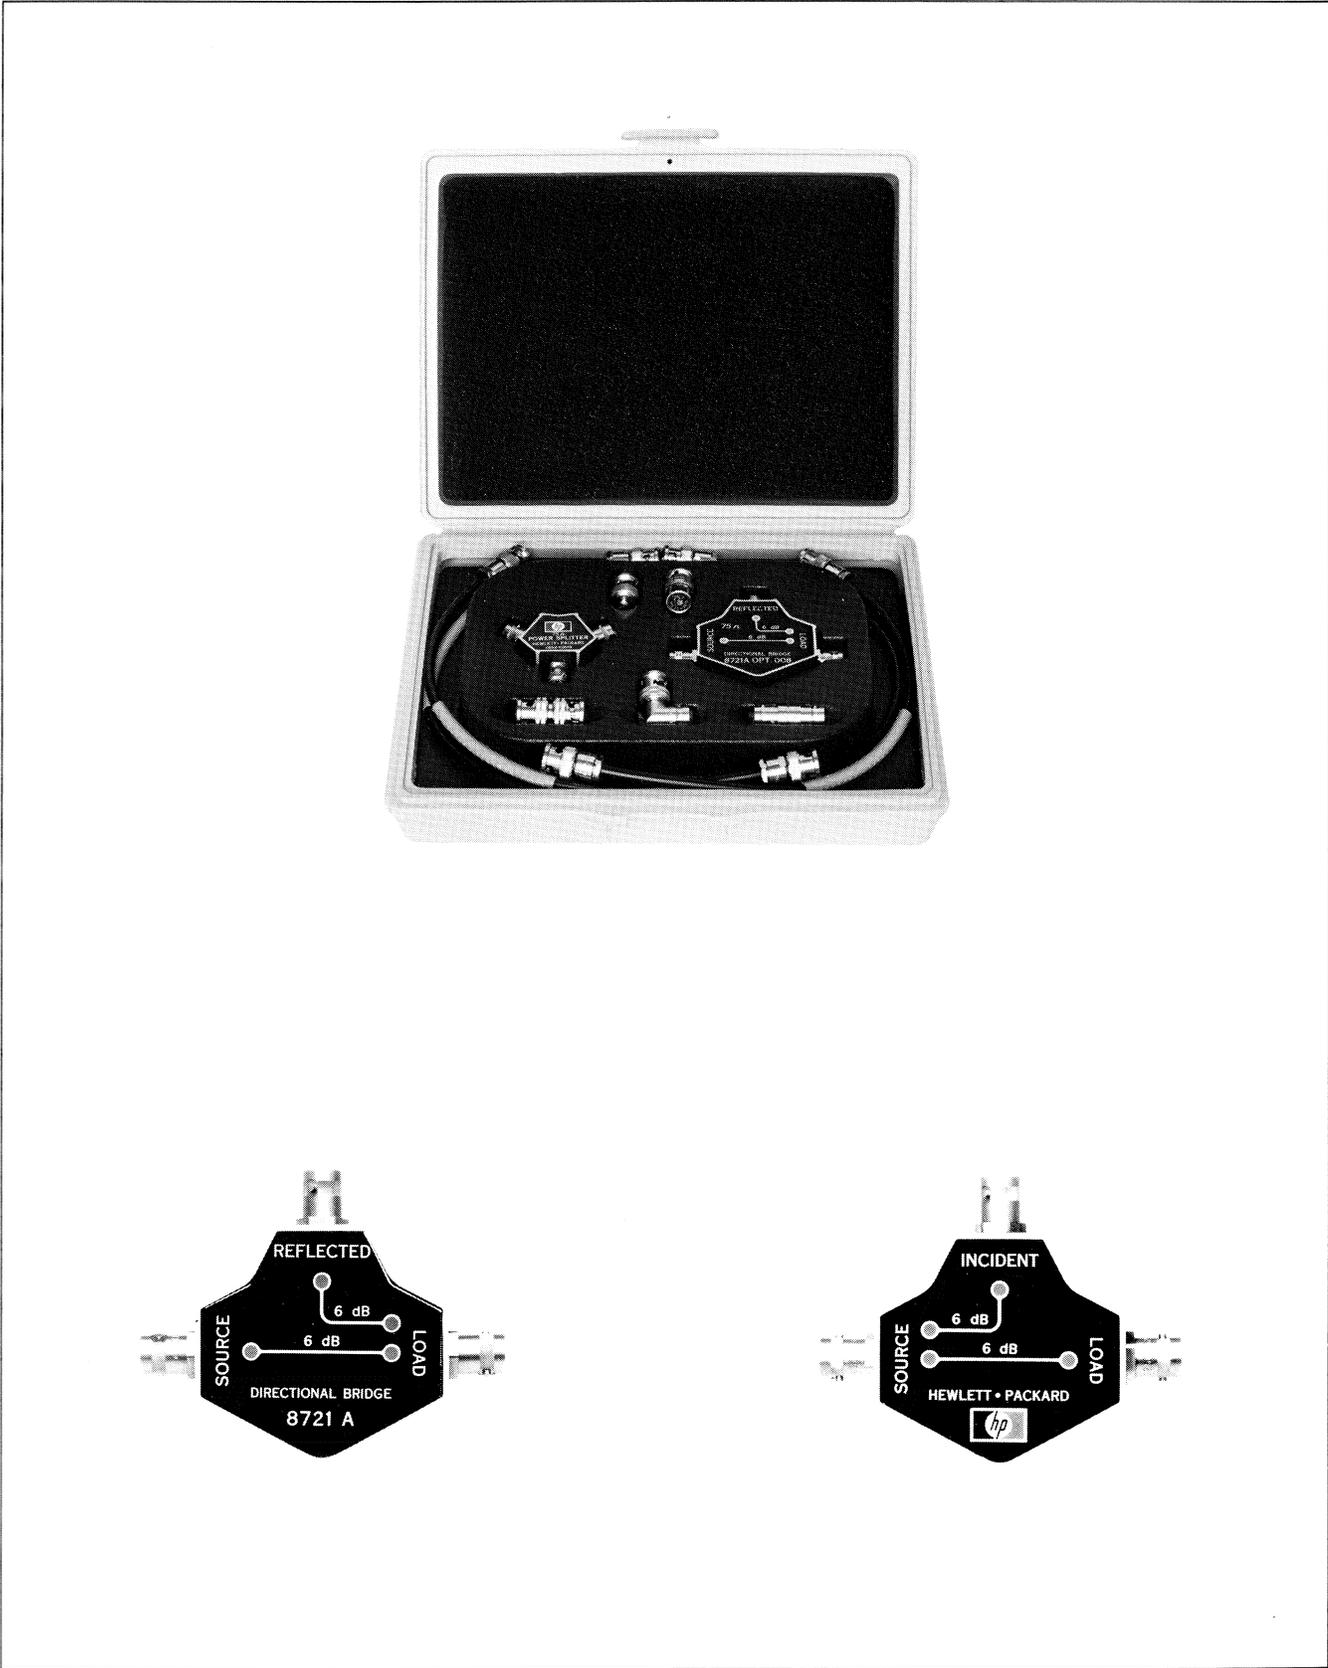


Figure 1. HP 11652A Transmission/Reflection Kit and HP 8721A Directional Bridge

Table 1. Contents of HP 11652A Transmission/Reflection Kit

Qty.	HP Part Number	Description
1	1250-0076	Conn Angle
1	1250-0080	Conn-RF Adptr
1	1250-0216	Conn-RF BNC
1	1250-0929	Conn-BNC Short
1	8721A	Directional Bridge
1	11652-60001	Precision Termination
2	11652-60002	Cable Assy, 1 ft.
1	11652-60003	Cable Assy, 2 ft.
1	11652-60004	Cable Assy, 3 ft. 1 in.
1	11652-60009	Power Splitter

INTRODUCTION

The HP Model 11652A Transmission/Reflection Kit (see Figure 1) is used when characterizing 50-ohm RF networks from 0.1 to 110 MHz. Swept measurements may be made when the HP 11652A is used with the HP 8407A Network Analyzer (see Figures 4 and 5). Single frequency measurements may be made when using the HP 11652A with the HP 8405A Vector Voltmeter (see Figures 6 and 7).

The HP Model 8721A Directional Bridge, which is available separately or as part of the HP Model 11652A Transmission/Reflection Kit, is principally used to make reflection measurements. The HP 8721A is also very useful for power monitoring and closed-loop leveling applications.

INITIAL INSPECTION

Mechanical Check

If damage to the shipping carton is evident, ask that the carrier's agent be present when the instrument is unpacked. Inspect the parts for mechanical damage, such as scratches or dents. Also, check the cushioning material for signs of severe stress.

Electrical Check

The electrical performance should be verified as soon as possible after receipt. Refer to the paragraph on MAINTENANCE.

Claim for Damage

If any unit is mechanically damaged or fails to meet specifications upon receipt, notify the carrier and your nearest Hewlett-Packard office immediately (a list of regional offices is at the rear of this operating note). Retain the shipping carton and the padding for the carrier's inspection. The HP office will arrange for repair or replacement without waiting for the claim against the carrier to be settled.

REPACKAGING FOR SHIPMENT

Using Original Packaging

The same containers and materials used in factory packaging can be obtained through the HP offices near you (a list of regional offices is at the rear of this operating note).

If the HP 11652A or HP 8721A is being returned to Hewlett-Packard for servicing, attach a tag indicating the type of service required, return address, and model or part number. Also mark the container FRAGILE to assure careful handling.

Using Other Packaging

If it is desired to return a component without its case, the following general instructions should be used for repackaging with commercially-available materials:

1. Wrap the component in heavy paper or plastic. (If shipping to a Hewlett-Packard office attach a tag indicating the type of service required, return address, and model or part number.
2. Use a strong shipping container. A double-wall carton made of 350-pound test material is adequate.
3. Use enough shock-absorbing material (three to four inch layer) around all sides of the fixture to provide a firm cushion and prevent movement inside the container.
4. Seal the shipping carton securely.
5. Mark the shipping carton FRAGILE to assure careful handling.

TRANSMISSION/REFLECTION KIT CONTENTS

Refer to Table 1 for a list of the components furnished in the HP Model 11652A Transmission/ Reflection Kit.

SPECIFICATIONS

Refer to Table 2 for the specifications and circuit representations of the components in the HP 11652A Kit.

Table 2. Specifications

COMPLETE KIT:

Plastic Case Dimensions:

10 in. by 7-1/2 in. by 2-3/8 in.

Net Weight: 2 lb, 3 oz.

COMPONENTS:

Directional Bridge (HP 8721A)

Impedance: 50 ohm nominal

Load Port VSWR (Reflection Measurements)*: <1.063 (30 dB return loss) 0.1 to 110 MHz.


Directivity: >40 dB (>30 dB, 0.1 – 1.0 MHz)

Coupling: 6 dB nominal. ± 0.6 dB frequency variation when used with HP 8407A Network Analyzer.

Transmission: 6 dB nominal insertion loss. ± 0.2 dB frequency variation when used with HP 8407A Network Analyzer.

Maximum input power: +20 dBm

Connectors: BNC female

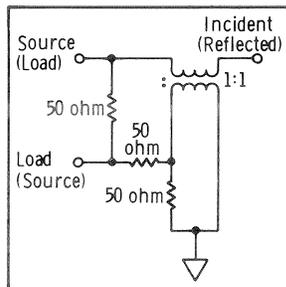

Circuit Equivalent of Directional Bridge


Power Splitter (11652-60009)

Impedance: 50 ohm nominal

Input VSWR: 1.02 (>40 dB return loss)

Output VSWR: 1.02 (>40 dB return loss), when used with the HP 8407A or HP 8405A

Connectors: BNC female

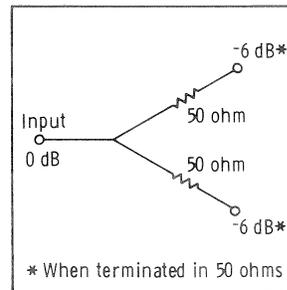


Circuit Equivalent of Power Splitter

Precision Termination (11652-60001)

Impedance: 50 ohm nominal

VSWR: 1.014 (>43 dB return loss)

Connector: BNC male

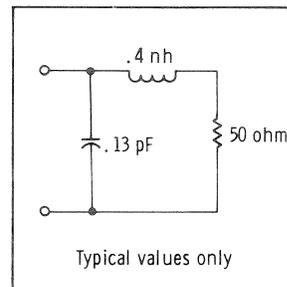

Circuit Equivalent of Precision Termination

*NOTE: Load Port VSWR (Power Monitoring) is not specified.

OPERATION

REFLECTION MEASUREMENTS WITH THE HP 8721A

The HP 8721A Directional Bridge (functionally similar to a directional coupler) is a valuable device in reflection measurements and power monitoring.

By measuring the reflected voltage and comparing this to the voltage incident upon a device under test, you can characterize the test device for its complex reflection coefficient ($E_{\text{REFLECTED}}/E_{\text{INCIDENT}}$), complex impedance, VSWR, and return loss ($-20 \text{ Log reflection coefficient}$).

To find the ratio of two voltages, measure the voltages present at a prescribed test channel and compare it to a reference voltage. To make a reflection measurement, use an instrument such as the HP 8405A Vector Voltmeter and connect the directional bridge as shown in Figure 2.

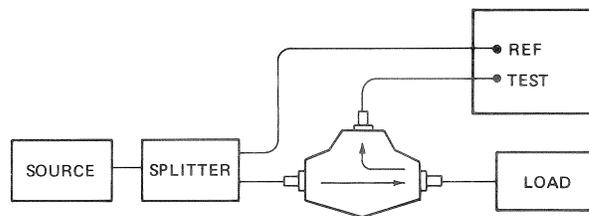


Figure 2. Reflection Measurements with the HP 8721A

POWER MONITORING WITH THE HP 8721A

Power monitoring can also be accomplished by the HP 8721A Directional Bridge. The HP 8721A can monitor the power being produced by a source while loaded and also monitor the power being delivered to a remote load. To use the directional bridge for this purpose, insert the bridge as shown in Figure 3. Since there is a 6 dB drop below the source power level in both arms of the bridge, the power meter measures the power delivered to the load.

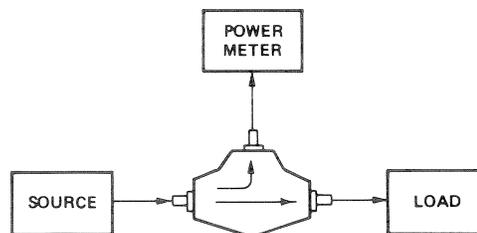


Figure 3. Power Monitoring with the HP 8721A

HP 11652A KIT MEASUREMENTS WITH THE HP 8407A

Precautions

Do not misplace the cables supplied with the kit. They have been carefully chosen for proper electrical length and are triple-shielded for isolation. Be sure to use proper lengths of cable during setup (refer to Figures 4 through 7).

Transmission Measurements

When making transmission measurements, keep the following points in mind (Refer also to AN 121-1 "Network Analysis with the HP 8407A 0.1 – 110 MHz."):

- The HP 11652A is used as shown in Figure 4 when making a transmission measurement.
- Power entering the power splitter is divided into two channels, reference and test. The HP 8407A measures the ratio of the test channel to the reference channel and measures the phase difference between the two channels.
- The cable lengths specified are necessary in order to ensure matched electrical lengths between channels.
- The general procedure for making a transmission measurement is the following:

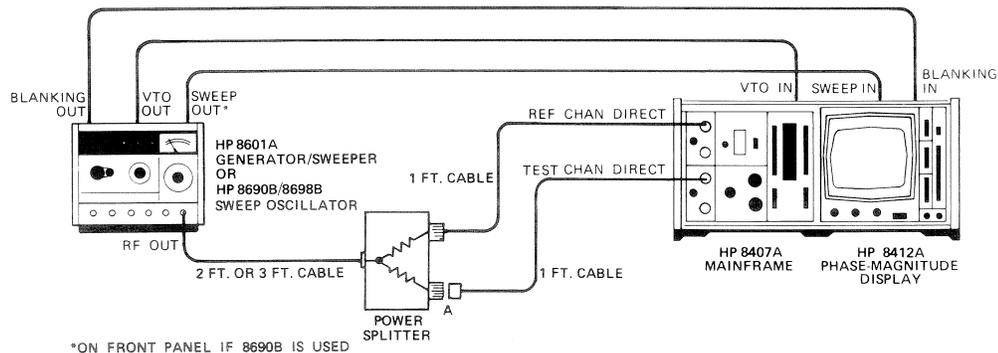


Figure 4. Basic Setup for Transmission Measurements

Procedure

1. Set up the equipment as shown in Figure 4.
2. Establish a 0 dB, zero degree reference level on the HP 8407A.
3. Insert the test network at point A and make the measurement.

Reflection Measurements

Be sure the HP 8721A Directional Bridge is being used as a reverse coupler, not as a forward coupler during a reflection measurement (see Figure 5). This ensures that only the reflected signal will enter the test channel ($E_{\text{REFLECTED}}$)

When making reflection measurements keep the following points in mind (Refer also to AN121-1 "Network Analysis with the HP 8407A 0.1 – 110 MHz."):

- The HP 11652A is used as shown in Figure 5 when measuring complex impedance, reflection coefficient or return loss (VSWR).
- Power from the sweeper is again divided into a reference and a test channel. This time, however, the signal entering the test channel is the reflected voltage from the input to a network, not the transmitted voltage. The HP 8407A takes the ratio of $E_{\text{REFLECTED}}/E_{\text{INCIDENT}}$ which is defined as reflection coefficient.
- The cable lengths specified are necessary to ensure proper phase matching of the two channels.
- The general procedure for making a reflection measurement is the following:

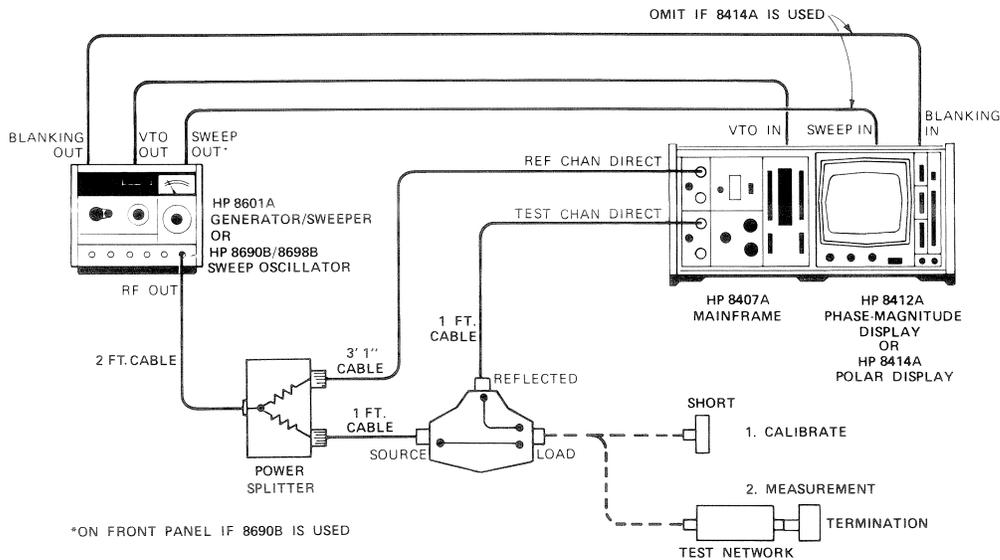


Figure 5. Basic Setup for Reflection Measurements

Procedure

1. Set up the equipment as shown in Figure 5.
2. Place a short circuit (or open circuit) at the LOAD port of the directional bridge. Establish a 0 dB, 180 degree (or 0 dB, zero degree) reference level on the HP 8407A Phase Magnitude Display or the HP 8414A Polar Display.
3. Replace the short with the terminated network and make the measurement.

HP 11652A KIT MEASUREMENTS WITH THE HP 8405A VECTOR VOLTMETER, 0.1 to 110 MHz

The HP 11652A can be used with the HP 8405A Vector Voltmeter to make CW transmission and reflection measurements. The procedure is outlined below. (Refer also to the HP 8405A *Operating and Service Manual*.)

Transmission Measurement Procedure

1. Set up the equipment as shown in Figure 6.
2. Establish a 0 dB, zero degree reference level with the CHANNEL switch set to B. (Set the amplitude with the oscillator attenuator and the phase with the HP 8405A PHASE ZERO.)
3. Insert the test device at point A in Figure 6 and make the measurement.

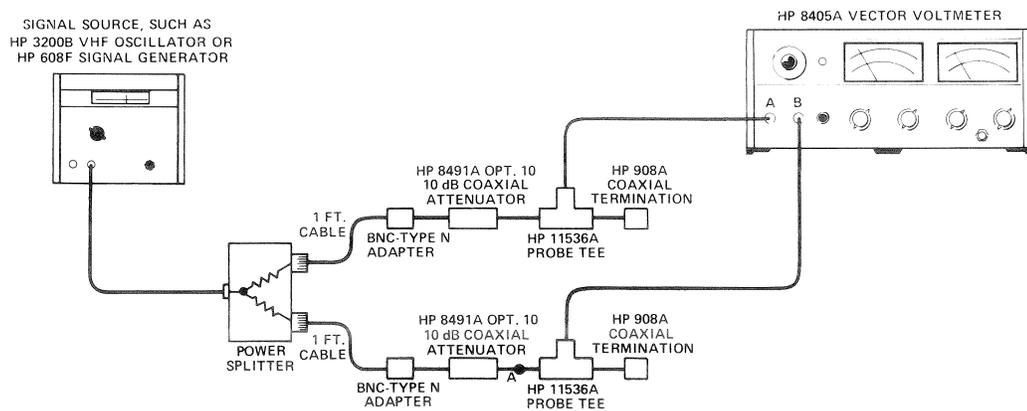


Figure 6. Setup for Making Transmission Measurements with HP 8405A

Reflection Measurement Procedure

1. Setup the equipment as shown in Figure 7. Be sure to use the cable lengths specified (from the HP 11652A) in order to ensure proper phase matching between channels A and B.
2. Place a short circuit at the LOAD port of the directional bridge. Establish a 0 dB, 180 degree reference level with the CHANNEL switch set to B. (Use the oscillator output attenuator to set the amplitude and the HP 8405A PHASE ZERO to set the phase).
3. Replace the short (or open) with the terminated network and read return loss in dB, degrees.

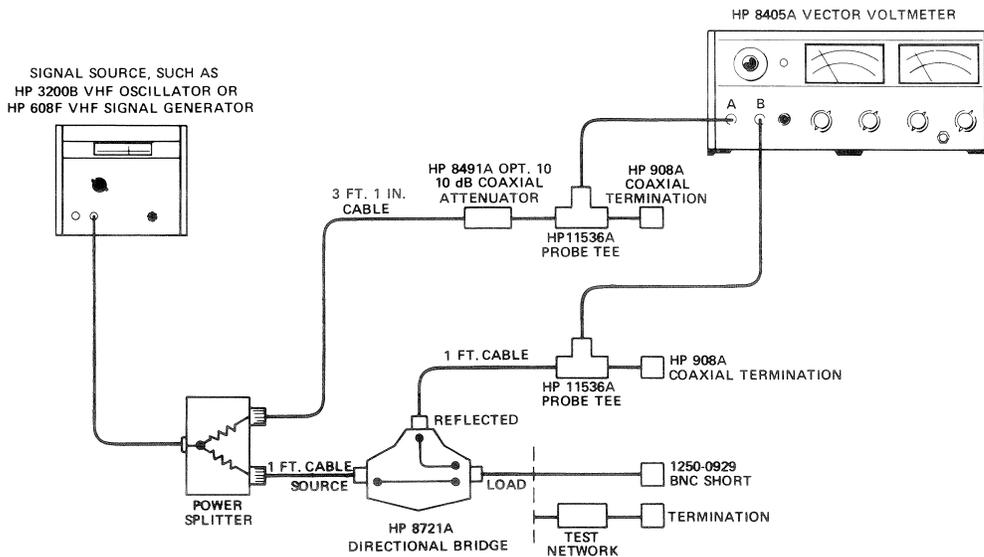


Figure 7. Setup for Making Reflection Measurements with HP 8405A

MAINTENANCE

Specifications for the Directional Bridge, Power Splitter, and Precision Termination are given in Table 2. However, the individual specifications for these components are of such a tolerance that the ambiguities encountered in the directivity, port VSWR, and Input/Output VSWR measurement setups impair the checking of each of the component's specifications. Verification of the individual specifications can be accomplished by using an HP 8507B Automatic Network Analyzer with an Accuracy Improved Measurement (AIM) Program. This system will remove the vector mismatch uncertainties from the measurements.

REPLACEABLE PARTS

The HP 8721A Directional Bridge, the Power Splitter and the Precision Termination are not field repairable. If any of them do not meet the specifications in Table 2, return the component to the HP Service Center nearest you.

Contacting Agilent

This information supersedes all prior HP contact information.			
Online assistance: www.agilent.com/find/assist			
Americas			
Brazil <i>(tel)</i> (+55) 11 3351 7012 <i>(fax)</i> (+55) 11 3351 7024	Canada <i>(tel)</i> 888 447 7378 <i>(fax)</i> 905 282 6495	Mexico <i>(tel)</i> 1 800 254 2440 <i>(fax)</i> 1 800 254 4222	United States <i>(tel)</i> 800 829 4444 <i>(alt)</i> (+1) 303 662 3998 <i>(fax)</i> 800 829 4433
Asia Pacific and Japan			
Australia <i>(tel)</i> 1 800 225 574 <i>(fax)</i> 1 800 681 776 <i>(fax)</i> 1 800 225 539	China <i>(tel)</i> 800 810 0508 <i>(alt)</i> 800 810 0510 <i>(fax)</i> 800 810 0507 <i>(fax)</i> 800 810 0362	Hong Kong <i>(tel)</i> 800 933 229 <i>(fax)</i> 800 900 701	India <i>(tel)</i> 1600 112 626 <i>(fax)</i> 1600 112 727 <i>(fax)</i> 1600 113 040
Japan (Bench) <i>(tel)</i> 0120 32 0119 <i>(alt)</i> (+81) 426 56 7799 <i>(fax)</i> 0120 01 2144	Japan (On-Site) <i>(tel)</i> 0120 802 363 <i>(alt)</i> (+81) 426 56 7498 <i>(fax)</i> (+81) 426 60 8953	Singapore <i>(tel)</i> 1 800 275 0880 <i>(fax)</i> (+65) 6755 1235 <i>(fax)</i> (+65) 6755 1214	South Korea <i>(tel)</i> 080 778 0011 <i>(fax)</i> 080 778 0013
Taiwan <i>(tel)</i> 0800 047 669 <i>(fax)</i> 0800 047 667 <i>(fax)</i> 886 3492 0779	Thailand <i>(tel)</i> 1 800 2758 5822 <i>(alt)</i> (+66) 2267 5913 <i>(fax)</i> 1 800 656 336	Malaysia <i>(tel)</i> 1800 880 399 <i>(fax)</i> 1800 801 054	
Europe			
Austria <i>(tel)</i> 0820 87 44 11* <i>(fax)</i> 0820 87 44 22	Belgium <i>(tel)</i> (+32) (0)2 404 9340 <i>(alt)</i> (+32) (0)2 404 9000 <i>(fax)</i> (+32) (0)2 404 9395	Denmark <i>(tel)</i> (+45) 7013 1515 <i>(alt)</i> (+45) 7013 7313 <i>(fax)</i> (+45) 7013 1555	Finland <i>(tel)</i> (+358) 10 855 2100 <i>(fax)</i> (+358) (0) 10 855 2923
France <i>(tel)</i> 0825 010 700* <i>(alt)</i> (+33) (0)1 6453 5623 <i>(fax)</i> 0825 010 701*	Germany <i>(tel)</i> 01805 24 6333* <i>(alt)</i> 01805 24 6330* <i>(fax)</i> 01805 24 6336*	Ireland <i>(tel)</i> (+353) (0)1 890 924 204 <i>(alt)</i> (+353) (0)1 890 924 206 <i>(fax)</i> (+353) (0)1 890 924 024	Israel <i>(tel)</i> (+972) 3 9288 500 <i>(fax)</i> (+972) 3 9288 501
Italy <i>(tel)</i> (+39) (0)2 9260 8484 <i>(fax)</i> (+39) (0)2 9544 1175	Luxemburg <i>(tel)</i> (+32) (0)2 404 9340 <i>(alt)</i> (+32) (0)2 404 9000 <i>(fax)</i> (+32) (0)2 404 9395	Netherlands <i>(tel)</i> (+31) (0)20 547 2111 <i>(alt)</i> (+31) (0)20 547 2000 <i>(fax)</i> (+31) (0)20 547 2190	Russia <i>(tel)</i> (+7) 095 797 3963 <i>(alt)</i> (+7) 095 797 3900 <i>(fax)</i> (+7) 095 797 3901
Spain <i>(tel)</i> (+34) 91 631 3300 <i>(alt)</i> (+34) 91 631 3000 <i>(fax)</i> (+34) 91 631 3301	Sweden <i>(tel)</i> 0200 88 22 55* <i>(alt)</i> (+46) (0)8 5064 8686 <i>(fax)</i> 020 120 2266*	Switzerland (French) <i>(tel)</i> 0800 80 5353 opt. 2* <i>(alt)</i> (+33) (0)1 6453 5623 <i>(fax)</i> (+41) (0)22 567 5313	Switzerland (German) <i>(tel)</i> 0800 80 5353 opt. 1* <i>(alt)</i> (+49) (0)7031 464 6333 <i>(fax)</i> (+41) (0)1 272 7373
Switzerland (Italian) <i>(tel)</i> 0800 80 5353 opt. 3* <i>(alt)</i> (+39) (0)2 9260 8484 <i>(fax)</i> (+41) (0)22 567 5314	United Kingdom <i>(tel)</i> (+44) (0)7004 666666 <i>(alt)</i> (+44) (0)7004 123123 <i>(fax)</i> (+44) (0)7004 444555		
<i>(tel)</i> = primary telephone number; <i>(alt)</i> = alternate telephone number; <i>(fax)</i> = FAX number; * = in country number			
			8/03/04