

BIIS 1200
Compatible

ICOM

SERVICE MANUAL

UHF TRANSCEIVER

IC-F40GT

IC-F40GS

IC-F41GT

IC-F41GS

(including MT version)

INTRODUCTION

This service manual describes the latest service information for the IC-F40GT/GS and IC-F41GT/GS UHF TRANSCEIVER at the time of publication.

To upgrade quality, all electrical or mechanical parts and internal circuits are subject to change without notice or obligation.

DANGER

NEVER connect the transceiver to an AC outlet or to a DC power supply that uses more than 10 V. This will ruin the transceiver.

DO NOT expose the transceiver to rain, snow or any liquids.

DO NOT reverse the polarities of the power supply when connecting the transceiver.

DO NOT apply an RF signal of more than 20 dBm (100 mW) to the antenna connector. This could damage the transceiver's front end.

INTRINSICALLY SAFE QUALIFICATION

When servicing intrinsically safe versions of the **IC-F40GT/GS** and **IC-F41GT/GS** the following conditions must be met. Failing to satisfy any of these conditions will invalidate the INTRINSICALLY SAFE certification.

1. Servicing the transceiver should only be undertaken by suitably qualified personnel in a non-hazardous area. Never attempt to remove the case in a hazardous area.
2. **ONLY** the approved battery, ICOM's BP-210FM may be used.
3. **USE ONLY** safety critical components as specified in the parts list (SECTION 6), should replacement of any item be necessary.

ORDERING PARTS

Be sure to include the following four points when ordering replacement parts:

1. 10-digit order numbers
2. Component part number and name
3. Equipment model name and unit name
4. Quantity required

<SAMPLE ORDER>

1110001810	S.IC TA7368F	IC-F40GT	MAIN UNIT	1 piece
8930053170	2337 4-Key	IC-F41GS	CHASSIS	5 pieces

Addresses are provided on the inside back cover for your convenience.



IC-F40GS
IC-F41GS

IC-F40GT
IC-F41GT

REPAIR NOTES

1. Make sure a problem is internal before disassembling the transceiver.
2. **DO NOT** open the transceiver until the transceiver is disconnected from its power source.
3. **DO NOT** force any of the variable components. Turn them slowly and smoothly.
4. **DO NOT** short any circuits or electronic parts. An insulated tuning tool **MUST** be used for all adjustments.
5. **DO NOT** keep power ON for a long time when the transceiver is defective.
6. **DO NOT** transmit power into a signal generator or a sweep generator.
7. **ALWAYS** connect a 40 dB or 50 dB attenuator between the transceiver and a deviation meter or spectrum analyser when using such test equipment.
8. **READ** the instructions of test equipment thoroughly before connecting equipment to the transceiver.

EXPLICIT DEFINITIONS

FREQUENCY COVERAGE

L-band		400–430 MHz
M-band	ML-band	440–480 MHz
	MH-band	450–490 MHz
H-band	H1-band	480–512 MHz
	H2-band	480–520 MHz

CHANNEL SPACING

Wide/Narrow-type	25 kHz/12.5 kHz
Middle/Narrow-type	20 kHz/12.5 kHz

TABLE OF CONTENTS

SECTION 1	SPECIFICATIONS	
SECTION 2	INSIDE VIEWS	
SECTION 3	DISASSEMBLY INSTRUCTIONS	
SECTION 4	CIRCUIT DESCRIPTION	
4 - 1	RECEIVER CIRCUITS	4 - 1
4 - 2	TRANSMITTER CIRCUITS	4 - 2
4 - 3	PLL CIRCUIT	4 - 3
4 - 4	FFSK CIRCUITS	4 - 4
4 - 5	POWER SUPPLY CIRCUITS	4 - 5
4 - 6	CPU PORT ALLOCATIONS	4 - 5
SECTION 5	ADJUSTMENT PROCEDURES	
5 - 1	PREPARATION	5 - 1
5 - 2	PLL ADJUSTMENT	5 - 4
5 - 3	SOFTWARE ADJUSTMENT	5 - 5
SECTION 6	PARTS LIST	
SECTION 7	MECHANICAL PARTS AND DISASSEMBLY	
SECTION 8	SEMI-CONDUCTOR INFORMATION	
SECTION 9	BOARD LAYOUTS	
9 - 1	FRONT UNIT	9 - 1
9 - 2	F40G MAIN UNIT	9 - 3
9 - 3	F41G MAIN UNIT	9 - 5
SECTION 10	BC-137 OPTIONAL DESKTOP CHARGER INFORMATION	
SECTION 11	BLOCK DIAGRAM	
SECTION 12	VOLTAGE DIAGRAM	

SECTION 1 SPECIFICATIONS


		USA/GEN	EUR
GENERAL	Measurement method	EIA-152-C/204D or TIA-603	
	Frequency coverage	[L-band]: 400.000–430.000 MHz [ML-band]: 440.000–480.000 MHz [GEN]/[EUR] [MH-band]: 450.000–490.000 MHz [USA]/[GEN] [H-band]: 480.000–512.000 MHz [USA], 480.000–520.000 MHz [GEN]	
	Type of emission	16K0F3E [25 kHz; Wide], 8K50F3E [12.5 kHz; Narrow] 14K0F3E [20 kHz; Middle], 8K50F3E [12.5 kHz; Narrow]	
	Number of conventional channels	Max. 256 ch (16 channels × 16 banks)	
	Power supply requirement	7.2 V DC (negative ground; supplied battery pack)	
	Current drain (approx.)	TX at High power 2.0 A Rx rated audio 300 mA stand-by 95 mA (typical)	
	Frequency error	±2.5 ppm	±1.5 kHz
	Usable temperature range	–30°C to +60°C (–22°F to +140°F)	–25°C to +55°C
	Dimensions (proj. not included)	54(W) × 139(H) × 38(D) mm; 2 ¹ / ₈ (W) × 5 ¹ / ₃₂ (H) × 1 ¹ / ₂ (D) inch	
	Weight (approx.)	420 g; 14.8 oz (with BP-210)	
TRANSMITTER	RF output power	4 W / 2 W / 1 W (High/Low2/Low1)	
	Modulation system	Variable reactance frequency modulation	
	Maximum permissible deviation	±5.0 kHz [Wide], ±2.5 kHz [Narrow]	
	Spurious emissions	73 dBc typical	0.25 μW
	Adjacent channel power	70 dB [Wide], 60 dB [Narrow]	
	Audio frequency response	+2 dB to –8 dB of 6 dB/octarve range from 300 Hz to 3000 Hz [Wide]/2550 Hz [Narrow]	
	Audio harmonic distortion	3% typical at 1 kHz, 40% deviation	
	FM hum and noise (typical)	46 dB [Wide], 40 dB [Narrow]	—
	Residual modulation (typical)	—	45 dB [Wide], 43 dB [Narrow]
	Limiting charact of modulator	60–100% of max. deviation	
Ext. microphone connector	9-pin multi connector/2.2 kΩ		
RECEIVER	Receive system	Double-conversion superheterodyne system	
	Intermediate frequencies	1st: 47.25 MHz, 2nd: 450 kHz	
	Sensitivity (typical)	0.25 μV at 12 dB SINAD	–4 dBμV (emf) at 20 dB SINAD
	Squelch sencitivity (at threshold) (typical)	0.25 μV	–4 dBμV (emf)
	Adjcent channel selectivity (typical)	73 dB [Wide], 63 dB [Narrow]	
	Spurious response	70 dB	
	Intermoduration (typical)	74 dB	70 dB
	FM hum and noise (typical)	46 dB [Wide], 40 dB [Narrow]	—
	Hum and noise (with CCITT filter) (typical)	—	45 dB [Wide], 43 dB [Narrow]
	Audio output power (at 7.2 V DC)	500 mW typical at 5% distortion with a 8 Ω load 600 mW typical at 5% distortion with a 6 Ω load	
External SP connector	9-pin multi connector/8 Ω		

All stated specifications are subject to change without notice or obligation.

SECTION 2 INSIDE VIEWS


• FRONT UNIT

Bottom view

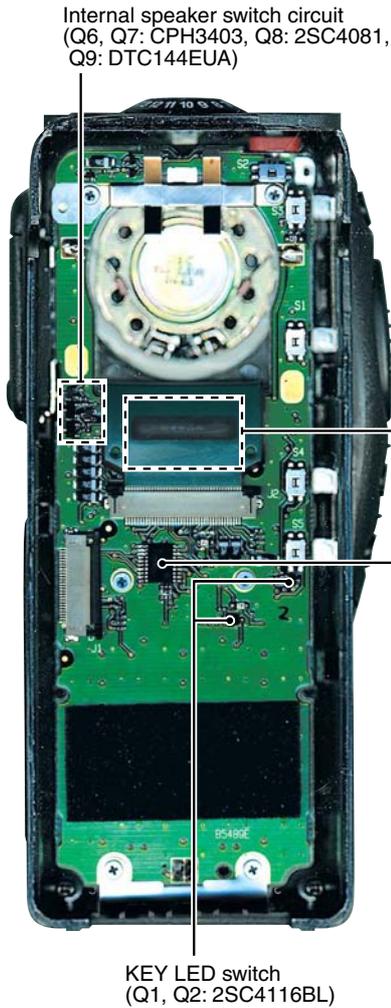


• MAIN UNIT

Top view

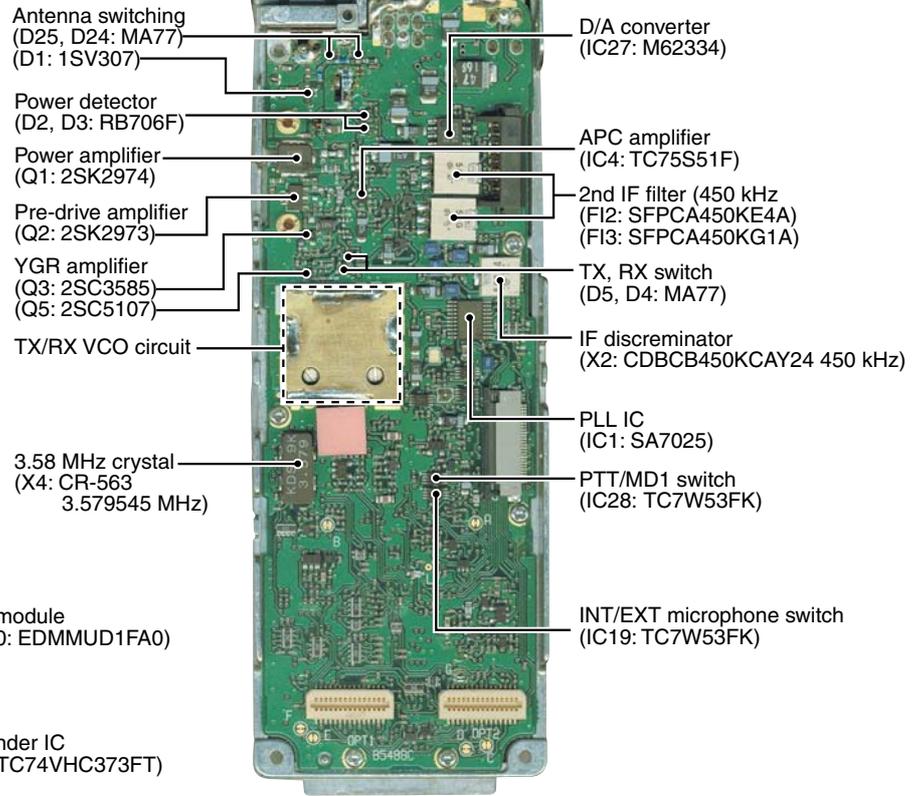


• MAIN UNIT

Bottom view

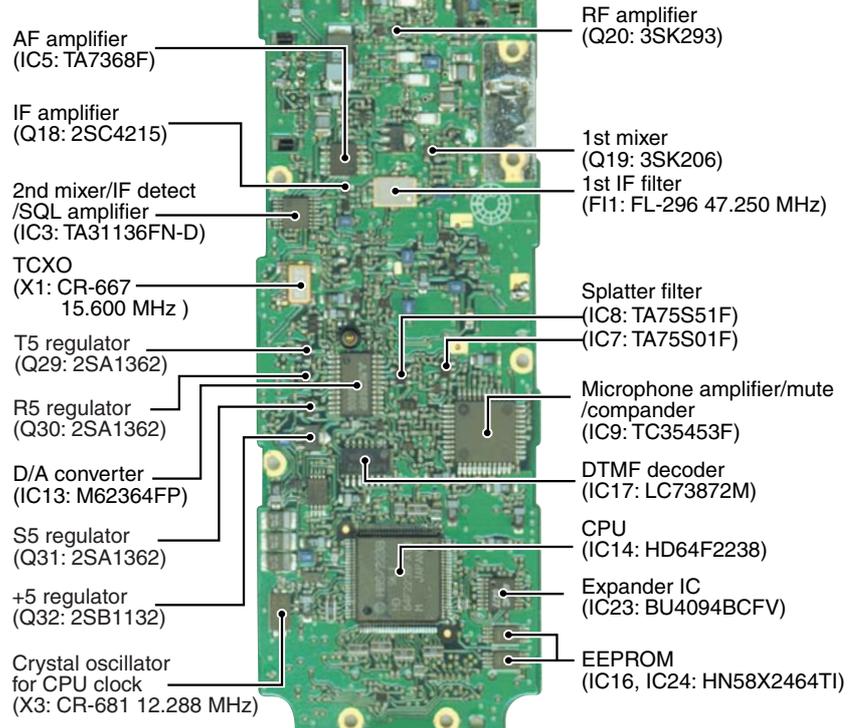


SECTION 3 DISASSEMBLY INSTRUCTIONS

1 Removing the chassis panel

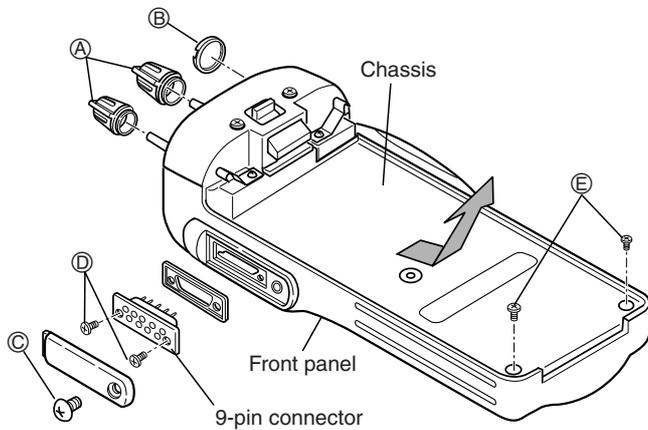


- ① Remove 2 knobs **A**, and unscrew 1 nut **B**.
- ② Unscrew 1 screw **C** (ICOM screw), and 2 screws **D** (2 × 4 mm, black) from the 9-pin connector.
- ③ Unscrew 2 screws **E** (2 × 8 mm, silver) from the chassis.
- ④ Take off the chassis in the direction of the arrow.

2 Removing the shield plate

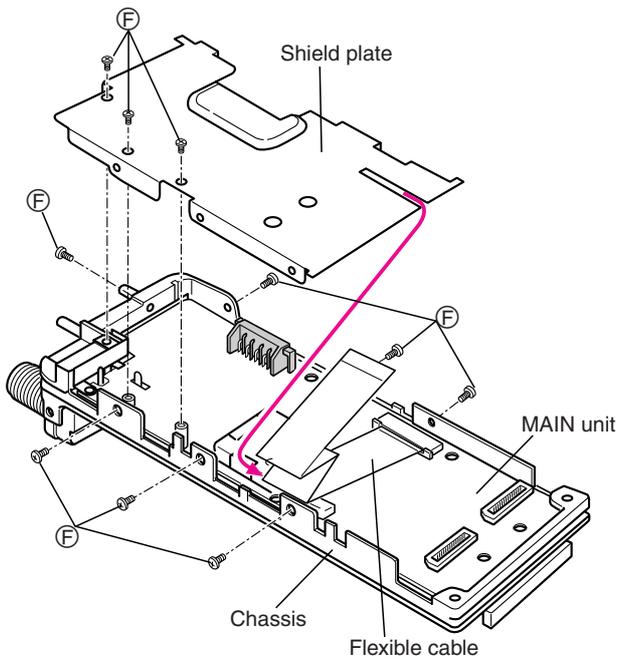


- ① Unplug the flexible cable from J1 on the FRONT unit to separate the chassis.
- ② Take off the flexible cable in the direction of the arrow.
- ③ Unscrew 10 screws **F** (2 × 3 mm, black) to separate the shield plate.

3 Removing the MAIN unit

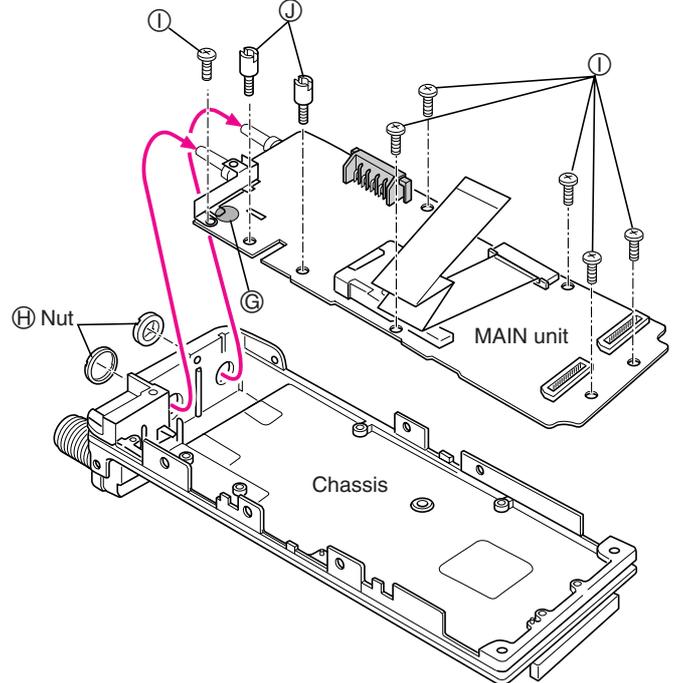

- ① Unsolder 1 point **C** at the antenna lead.
- ② Unscrew 2 nuts **H**.
- ③ Unscrew 6 screws **I** (2 × 4 mm, silver), and 2 screws **J** from the MAIN unit.
- ④ Take off the MAIN unit in the direction of the arrow.

4 Removing the FRONT unit

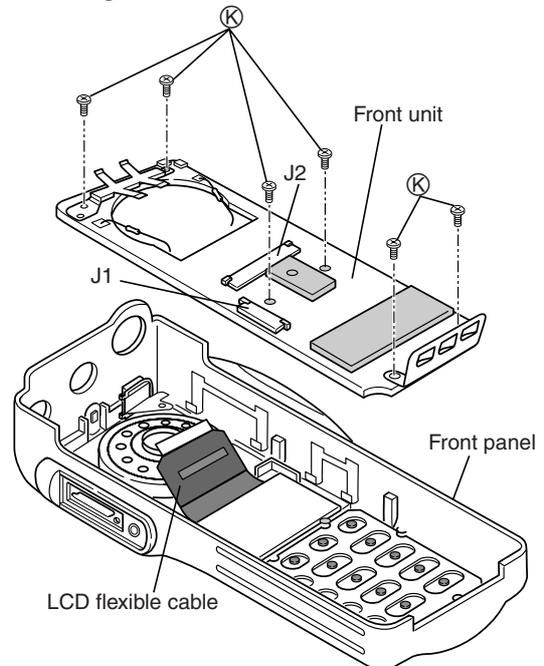

- ① Unplug the LCD flexible cable from J2 on the FRONT unit to separate the front panel.
- ② Unscrew 6 screws **K** (2 × 3.5 mm, silver) from the FRONT unit.
- ③ Unsolder the leads of speaker.

SECTION 4 CIRCUIT DESCRIPTION

4-1 RECEIVER CIRCUITS

4-1-1 ANTENNA SWITCHING CIRCUIT

The antenna switching circuit functions as a low-pass filter while receiving and a resonator circuit while transmitting. This circuit does not allow transmit signals to enter the receiver circuits.

Received signals enter the antenna connector (CHASSIS; MP44) and pass through the low-pass filter (L1, L2, C1, C2, C420). The filtered signals are passed through the $\lambda/4$ type antenna switching circuit (D25, L39, D24) and then applied to the RF circuit.

4-1-2 RF CIRCUIT

The RF circuit amplifies signals within the range of frequency coverage and filters out-of-band signals.

The signals from the antenna switching circuit pass through the tunable bandpass filter (D21, L37). The filtered signals are amplified at the RF amplifier (Q20) and then passed through the another three-stage bandpass filters (D20–D18, L36, L34, L33) to suppress unwanted signals. The filtered signals are applied to the 1st mixer circuit.

D18–D21 employ varactor diodes, that are controlled by the CPU via the D/A converter (IC27), to track the bandpass filter. These varactor diodes tune the center frequency of an RF pass band for wide bandwidth receiving and good image rejection.

4-1-3 1ST MIXER AND 1ST IF CIRCUITS

The 1st mixer circuit converts the received signal into fixed frequency of the 1st IF signal with the PLL output frequency. By changing the PLL frequency, only the desired frequency passes through a monolithic filter at the next stage of the 1st mixer.

The RF signals from the bandpass filter are mixed with the 1st LO signals, where come from the RX VCO circuit via the attenuator (R108–R106), at the 1st mixer circuit (Q19) to produce a 47.25 MHz 1st IF signal. The 1st IF signal is passed through a monolithic filter (F11) in order to obtain selection capability and to pass only the desired signals. The filtered signal is applied to the 2nd IF circuit after being amplified at the 1st IF amplifier (Q18).

4-1-4 2ND IF AND DEMODULATOR CIRCUITS

The 2nd mixer circuit converts the 1st IF signal into a 2nd IF signal. The double-conversion superheterodyne system (which convert receive signals twice) improves the image rejection ratio and obtains stable receiver gain.


The 1st IF signal from the IF amplifier (Q18) is applied to the 2nd mixer section of the FM IF IC (IC3, pin 16), and is mixed with the 2nd LO signal to be converted into a 450 kHz 2nd IF signal.

The FM IF IC (IC3) contains the 2nd mixer, 2nd local oscillator, limiter amplifier, quadrature detector, active filter and noise amplifier circuits. A 2nd LO signal (46.8 MHz) is produced at the PLL circuit by tripling its reference frequency (15.6 MHz).

The 2nd IF signal from the 2nd mixer (IC3, pin 3) passes through the ceramic filters (F12, F13) during narrow channel spacing selection or F12 only (bypassing F13) during wide channel spacing selection to remove unwanted heterodyned frequencies. It is then amplified at the limiter amplifier section (IC3, pin 5) and applied to the quadrature detector section (IC3, pins 10, 11) to demodulate the 2nd IF signal into AF signals.

The demodulated AF signals are output from pin 9 (IC3) and applied to the AF circuit via the receiver mute circuit.

• 2nd IF and demodulator circuits

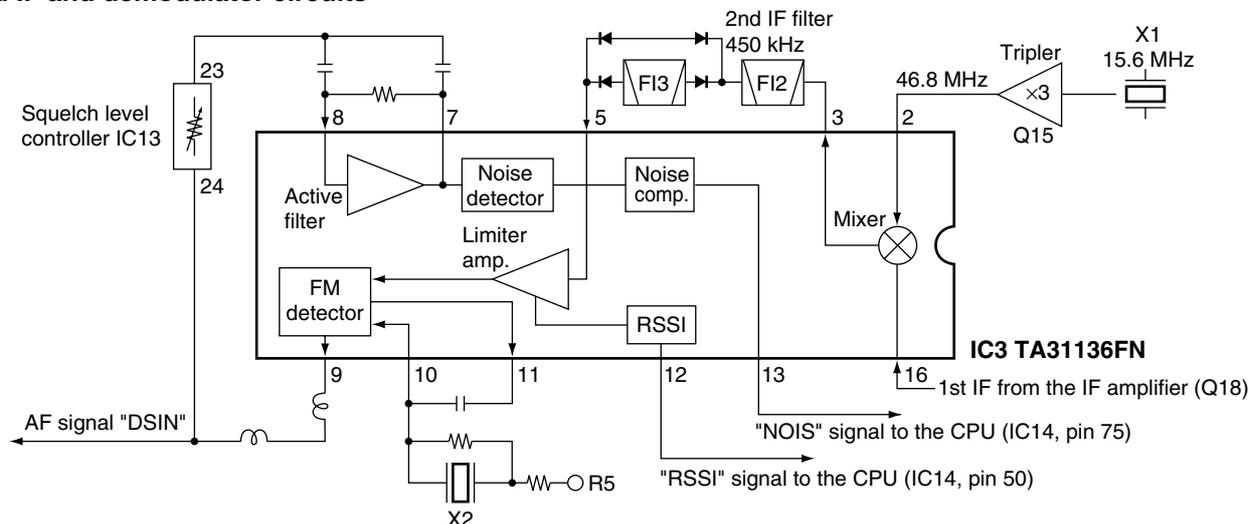

4-1-5 AF AMPLIFIER CIRCUIT

The AF amplifier circuit amplifies the demodulated AF signals to drive a speaker.

The AF signals from the FM IF IC (IC3, pin 9) are amplified at the AF amplifier section of the compander IC (IC9, pins 5, 4) and are then applied to the high-pass filter circuit (IC10).

The high-pass filter characteristics are controlled by the FSW signal from the I/O expander IC (IC23, pin 14). When FSW signal is high, the cut-off frequency is shifted higher to remove CTCSS or DTCS signals.

The filtered AF signals from the high-pass filter (IC10, pin 4) are applied to the de-emphasis section of compander IC (IC9, pin 3) with frequency characteristics of -6 dB/octave, and are then passed through the low-pass filter, high-pass filter, expander sections of compander IC (IC9). The output signal from IC9 (pin 38) is applied to the electronic volume controller (IC13, pin 1).

The output AF signals from the electronic volume controller (IC13, pin 2) are applied to the AF power amplifier (IC5) to drive the speaker.

4-1-6 RECEIVE MUTE CIRCUITS

• NOISE SQUELCH

A squelch circuit cuts out AF signals when no RF signals are received. By detecting noise components in the AF signals, the squelch circuit switches the AF mute switch.

Some noise components in the AF signals from the FM IF IC (IC3, pin 9) are passed through the level controller (IC13, pins 24, 23). The level controlled signals are applied to the active filter section in the FM IF IC (IC3, pin 8). Noise components about 10 kHz are amplified and output from pin 7.

The filtered signals are converted into the pulse-type signals at the noise detector section and output from pin 13 (NOIS).

The NOIS signal from the FM IF IC is applied to the CPU (IC14, pin 75). The CPU then analyzes the noise condition and controls the AF mute signal via "AFMT" line (IC23, pin 13) to the AF regulator (Q23, Q24).

• CTCSS AND DTCS

The tone squelch circuit detects AF signals and opens the squelch only when receiving a signal containing a matching subaudible tone (CTCSS or DTCS). When tone squelch is in use, and a signal with a mismatched or no subaudible tone is received, the tone squelch circuit mutes the AF signals even when noise squelch is open.

A portion of the AF signals from the FM IF IC (IC3, pin 9) passes through the low-pass filter (IC20b/a) to remove AF (voice) signals and is applied to the CTCSS or DTCS decoder inside of the CPU (IC14, pin 46) via the "RXDT" line to control the AF mute switch via the I/O expander IC (IC23).

4-2 TRANSMITTER CIRCUITS

4-2-1 MICROPHONE AMPLIFIER CIRCUIT

The microphone amplifier circuit amplifies audio signals within $+6$ dB/octave pre-emphasis characteristics from the microphone to a level needed for the modulation circuit.

The AF signals (MIC+) from the FRONT unit via J3 (pin 22) are passed through the internal/external microphone switch (IC19, pins 7, 1) and level controller (IC13, pins 9, 10) to the microphone amplifier circuit.

The AF signals from the level controller (IC13) are applied to the microphone amplifier section of compander IC (IC9, pin 12). The amplified signals are passed through the compressor, low-pass filter and high-pass filter sections of IC9.

The filtered AF signals are amplified at the buffer amplifier (Q47) and pre-emphasized with $+6$ dB/octave at the pre-emphasis circuit (C203, R166), and are then applied to the IDC amplifier section of IC9 (pin 8).

The amplified AF signals are passed through the limiter amplifier and low-pass filter sections of IC9 after being passed through the AF mute switch inside of IC9.

The output signals from pin 6 are passed through the splatter filter (IC8) and level controller (IC13, pins 21, 22), and are then applied to the modulation circuit (D7).

4-2-2 MODULATION CIRCUIT

The modulation circuit modulates the VCO oscillating signal (RF signal) using the microphone audio signals.

The AF signals from the level controller (IC13) change the reactance of varactor diode (D7) to modulate the oscillated signal at the TX VCO circuit (Q12, D8). The modulated VCO signal is amplified at the buffer amplifiers (Q8, Q6) and is then applied to the drive amplifier circuit via the T/R switch (D4).

The CTCSS/DTCS signals from the CPU (IC14, pin 44) are passed through the low-pass filter (IC21), level controller (IC13, pins 12, 11) and mixer (IC7), and are then applied to the VCO circuit via the splatter filter (IC8).

4-2-3 DRIVE/POWER AMPLIFIER CIRCUITS

The drive/power amplifier circuits amplify the VCO oscillating signal to an output power level.

The signal from the VCO circuit passes through the T/R switch (D4), and is amplified at the YGR (Q5, Q3), drive (Q2), power (Q1) amplifiers to obtain 4 W of RF power (at 7.2 V DC).

The amplified signal is passed through the APC detector, antenna switching circuit (D1) and low-pass filter, and is then applied to the antenna connector.

The bias current of the YGR (Q3; IC-F41GT/GS only), drive (Q2) and power (Q1) amplifiers is controlled by the APC circuit.

4-2-4 APC CIRCUIT

The APC circuit (IC4, Q22) protects the YGR (IC-F41GT/GS only), drive and power amplifiers from excessive current drive, and selects output power of HIGH, LOW2 or LOW1.

The APC detector circuit detects forward signals and reflection signals at D3 and D2 respectively. The combined voltage is at a minimum level when the antenna impedance is matched at 50 Ω and is increased when it is mismatched.

The detected voltage is applied to the differential amplifier (IC4, pin 3), and the "T4" signal from the D/A converter (IC27, pin 4), controlled by the CPU (IC14), is applied to the other input for reference. When antenna impedance is mismatched, the detected voltage exceeds the power setting voltage. Then the output voltage of the differential amplifier (IC4, pin 4) controls the input current of the YGR amplifier (Q3; IC-F41GT/GS only), drive amplifier (Q2) and power amplifier (Q1) to reduce the output power.

4-3 PLL CIRCUITS

4-3-1 PLL CIRCUIT

A PLL circuit provides stable oscillation of the transmit frequency and receive 1st LO frequency. The PLL output compares the phase of the divided VCO frequency to the reference frequency. The PLL output frequency is controlled by the divided ratio (N-data) of a programmable divider.

The PLL circuit contains the TX/RX VCO circuit (Q12, Q11). The oscillated signal is amplified at the buffer amplifiers (Q8, Q7) and then applied to the PLL IC (IC1, pin 5).

The PLL IC contains a prescaler, programmable counter, programmable divider and phase detector, etc. The entered signal is divided at the prescaler and programmable counter section by the N-data ratio from the CPU. The divided signal is detected on phase at the phase detector using the reference frequency.


If the oscillated signal drifts, its phase changes from that of the reference frequency, causing a lock voltage change to compensate for the drift in the oscillated frequency.

4-3-2 VCO CIRCUIT


The VCO circuit contains a separate RX VCO (Q11, D6) and TX VCO (Q12, D7, D8). The oscillated signal is amplified at the buffer amplifiers (Q8, Q6) and is then applied to the T/R switch (D5, D4). Then the receive 1st LO (Rx) signal is applied to the 1st mixer (Q19) and the transmit (Tx) signal to the YGR amplifier circuit (Q5).

A portion of the signal from the buffer amplifier (Q8) is fed back to the PLL IC (IC1, pin 5) via the buffer amplifier (Q7) as the comparison signal.

• APC circuit

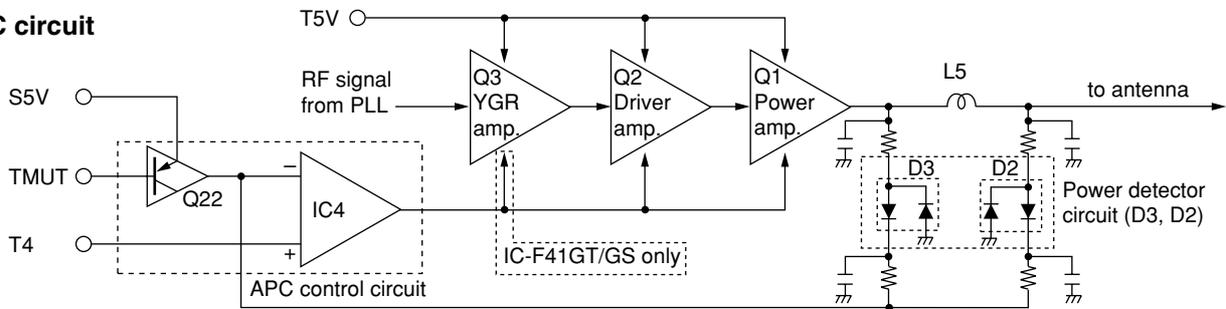

• PLL circuit

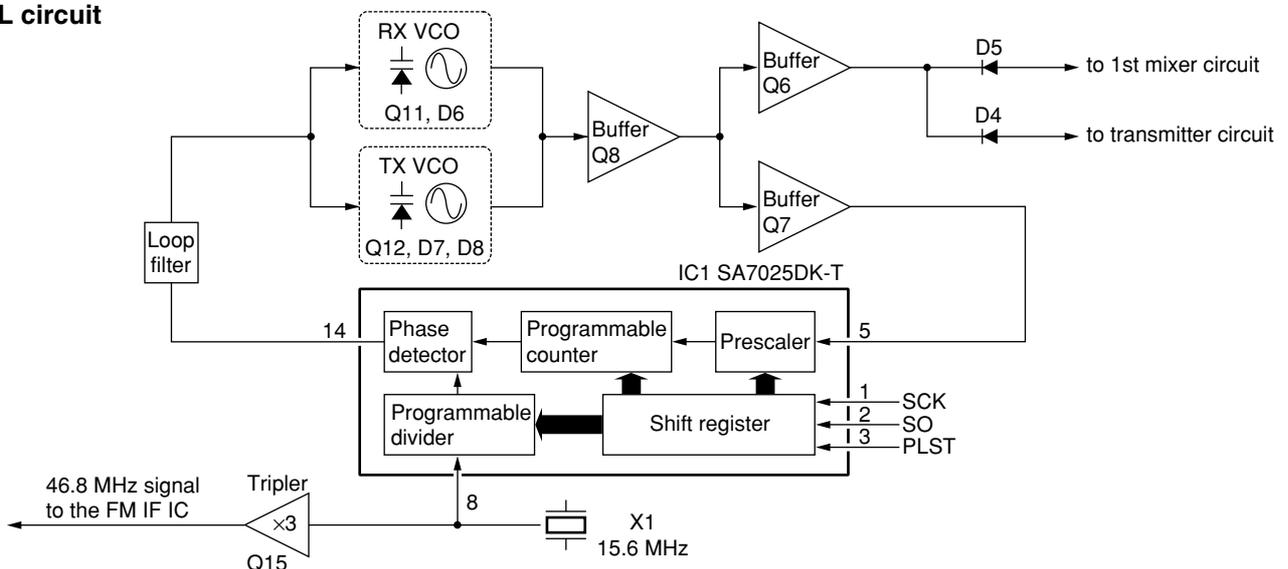

4-4 FFSK CIRCUIT DESCRIPTION

4-5-1 GENERAL

IC9 is the compander IC which is controlled by serial data bus line ("TRD", "MSKE", "DIN", "SCK", "APST", "REGS1", "REGS2", "RTM", "RDT", "FCLR" signals) from the CPU. The IC is composed of FFSK transmitting and receiving circuits, data register circuits, transmitting and receiving data buffer circuits, and so on.

X4 is oscillated 3.58 MHz reference signal to the IC9.

In case of the FFSK signal is used for the PM modulation, the FM/PM switch (IC26) is changed to pin 6.

In case of the FFSK signal is used for the FM modulation, the FM/PM switch (IC26) is changed to pin 7.

The output signal from IC26, pin 1 is applied to the the buffer amplifier (IC8, pins 1, 4), and is applied to the D/A convertor IC (IC13, pins 21, 22). The signal is applied to the modulation circuit (Q12, D7, D8).


4-4-2 DECODEING CIRCUIT

The input signal from the FM IC (IC3, pin 9) via the "DSIN" signal is applied to the compander IC (IC9, pin 5), and is then detected bit synchronization detection within 16 bit.

4-4-3 ENCODEING CIRCUIT

The FFSK signal is made by serial data bus line signals, and is then output from the compander IC (IC9, pin 6).

• Compander IC block diagram

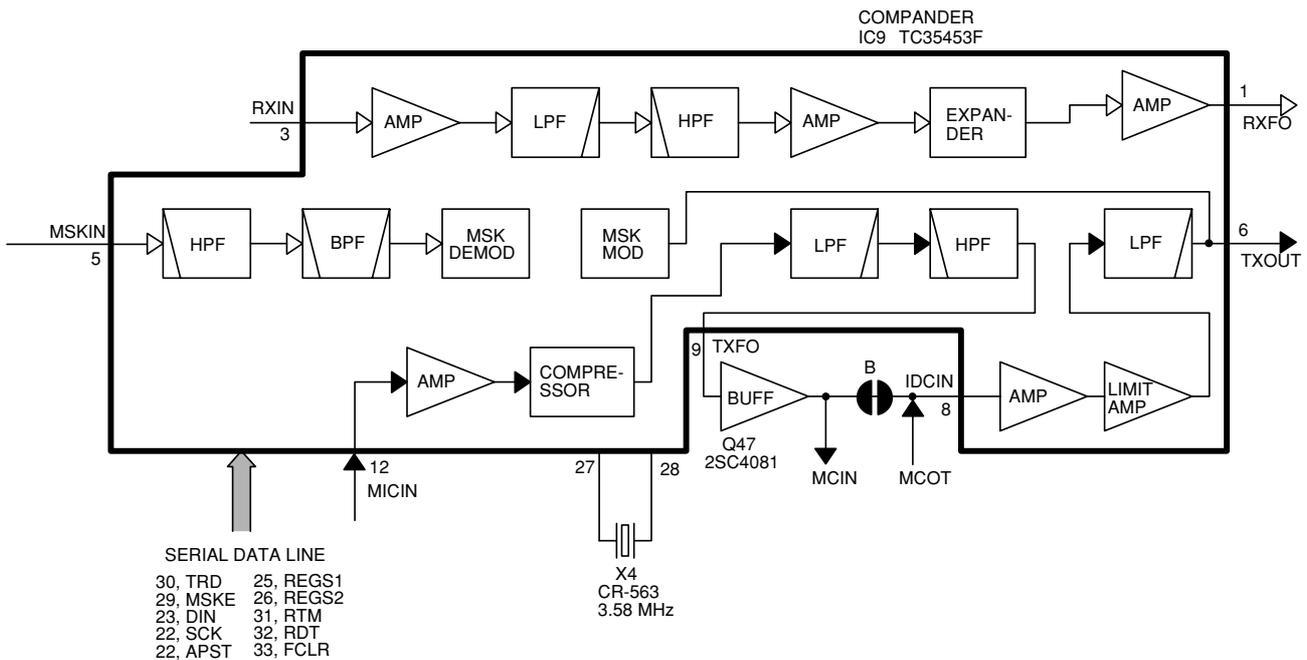

4-5 POWER SUPPLY CIRCUIT VOLTAGE LINE

LINE	DESCRIPTION
HV	The voltage from the attached battery pack.
VCC	The same voltage as the HV line (battery voltage) which is controlled by the power switch ([VOL] control).
CPU5V	Common 5 V converted from the VCC line by the reference regulator circuit (IC12). The output voltage is applied to the CPU (IC14), 5 V regulator circuit (Q32, Q33), reset circuit (IC15), and etc.
+5V	Common 5 V converted from the VCC line by the +5V regulator circuit (Q32, Q33).
S5V	Common 5 V converted from the +5V line by the S5V regulator circuit (Q31).
T5V	5 V for transmitter circuits regulated by the T5V regulator circuit (Q29).
R5V	5 V for receiver circuits regulated by the R5V regulator circuit (Q30).

4-6 PORT ALLOCATIONS

4-6-1 CPU (IC14)

PIN NO.	PORT NAME	DESCRIPTION
4	RESB	Outputs reset signal for the expander IC (IC23).
5	RMUT	Input port for AF mute signal from the optional units via J1 or J2.
6	MMUT	Input port for MIC mute signal from the optional units via J1 or J2.
7	PTOT	Input port for the [PTT] switch Low : While [PTT] switch is pushed.
13	EXST	Outputs strobe signals to the expander IC (IC23).
15	APST	Outputs strobe signals to the compander IC (IC9).
16	DIN	Outputs serial data signals to the compander IC (IC9).
17, 18, 19	RGS1, RGS2, MSKE	Output control signal for the compander IC (IC9).
21	FCLR	Outputs reset signal for the compander IC (IC9).
22–25	CB10–CB13	Input ports for rotary selector [SEL].
26	VCOS	Outputs TX VCO/RX VCO switching signal for the VCO switch (Q9, Q10). High : While transmitting
28	PLST	Outputs strobe signals to the PLL IC (IC1).
29	ULCK	Input port for the PLL unlock signal. Low : PLL is unlocked.
34	SCK	Outputs clock signal for the PLL IC (IC1), compander IC (IC9), expander IC (IC23), D/A converter (IC13), etc.

PIN NO.	PORT NAME	DESCRIPTION
35	SO	Outputs data signals for the PLL IC (IC1), compander IC (IC9), expander IC (IC23), D/A converter (IC13), etc.
36	DAST	Outputs strobe signals to the D/A converter (IC13).
39	DTAC	Output clock signal to the DTMF decoder (IC17).
43	SENC	Outputs single tone signal.
44	CTDA	Outputs CTCSS/DTCS tone signal.
45	SDEC	Single tone signal input port for decoding.
46	RXDT	CTCSS/DTCS signals input port for decoding.
47	AFVI	Input port for the volume control [VOL]. High : [VOL] is maximum clockwise.
49	LVIN	Input port for the PLL lock voltage.
50	RSSI	Input port for the RSSI detection.
59	RES	Input port for the reset signal.
68	DTSD	Outputs serial data signals to the DTMF decoder IC (IC17).
70	TMUT	Outputs transmit mute signal. Low : During unlock or while muted
71	R5C	Outputs R5 regulator control signal. Low: While receiving
73	T5C	Outputs T5 regulator control signal. Low: While transmitting
75	NOIS	Input port for noise signals (pulse-type) for noise squelch operation.
81	SDA	I/O port for data signals from/to the D/A converter (IC27).
82	MSO	I/O port for data signals from/to EEPROMs (IC16, IC24).
87	BEEP	Outputs beep audio signals.
94	MSCK	Outputs clock signal to EEPROMs (IC16, IC24).
95	SCL	Outputs clock signal to the D/A converter (IC27).

4-6-2 I/O EXPANDER (IC23)

Pin number	Port name	Description
4	BUSY	Outputs BUSY detection. Low : The channel is busy.
6	DUSE	Outputs low-pass filter cut-off frequency control signal when DTCS is activated.
7	W/N	Outputs IF bandwidth control signal. High : While IF bandwidth is narrow.
11	S5C	Outputs S5 regulator control signal.
12	SPCN	Outputs internal speaker select signal.
13	AFMT	Outputs control signal for the AF amplifier regulator circuit. High: While AF amp. is activated.
14	FSW	Outputs high-pass filter's characteristics select signal.

SECTION 5 ADJUSTMENT PROCEDURES

5-1 PREPARATION

5-1-1 CONVENTIONAL VERSION

When you adjust the contents on pages 5-7 to 5-9, SOFTWARE ADJUSTMENT, the optional CS-F30G ADJ ADJUSTMENT SOFTWARE (Rev. 1.0 or later), *OPC-966 JIG CABLE (modified OPC-966 CLONING CABLE) are required.

■ REQUIRED TEST EQUIPMENT

EQUIPMENT	GRADE AND RANGE	EQUIPMENT	GRADE AND RANGE
DC power supply	Output voltage : 7.5 V DC Current capacity : 5 A or more	Audio generator	Frequency range : 300–3000 Hz Output level : 1–500 mV
FM deviation meter	Frequency range : DC–600 MHz Measuring range : 0 to ± 10 kHz	Attenuator	Power attenuation : 40 or 50 dB Capacity : 10 W or more
Frequency counter	Frequency range : 0.1–600 MHz Frequency accuracy : ± 1 ppm or better Sensitivity : 100 mV or better	Standard signal generator (SSG)	Frequency range : 300–600 MHz Output level : 0.1 μ V–32 mV (–127 to –17 dBm)
Digital multimeter	Input impedance : 10 M Ω /V DC or better	DC voltmeter	Input impedance : 50 k Ω /V DC or better
RF power meter (terminated type)	Measuring range : 1–10 W Frequency range : 300–600 MHz Impedance : 50 Ω SWR : Less than 1.2 : 1	Oscilloscope	Frequency range : DC–20 MHz Measuring range : 0.01–20 V
		AC millivoltmeter	Measuring range : 10 mV–10 V

■ SYSTEM REQUIREMENTS

- IBM PC compatible computer with an RS -232C serial port (38400 bps or faster).
- Microsoft Windows 95 or Windows 98
- Intel i486DX processor or faster (Pentium 100 MHz or faster recommended)
- At least 16 MB RAM and 10 MB of hard disk space
- 640×480 pixel display (800×600 pixel display recommended)

■ ADJUSTMENT SOFTWARE INSTALLATION


- ① Boot up Windows.
- Quit all applications when Windows is running.
- ② Insert the 'CS-F30G' into the appropriate drive.
- ③ Select 'Run' from the [Start] menu.
- ④ Type the setup program name using the full path name, then push [Enter] key.
(ex. D:\CSF30GADJ\disk1\Setup.exe)
- ⑤ Follow the prompts.
- ⑥ Program group 'CS-F30G ADJ' appears in the 'Programs' folder of the [Start] menu.

■ STARTING SOFTWARE ADJUSTMENT

- ① Connect IC-F40GT, F40GS, F41GT or F41GS and PC with *OPC-966 JIG CABLE.
- ② Turn the transceiver power ON.
- ③ Boot up Windows, and click the program group 'CS-F30G ADJ' in the 'Programs' folder of the [Start] menu, then CS-F30G ADJ's window appears.
- ④ Click 'Connect' on the CS-F30G's window, then appears IC-F40GT, F40GS, F41GT or F41GS's up-to-date condition.
- ⑤ Set or modify adjustment data as desired.


• High power transmission

When you adjust the output power (high power), the battery type detector must be connected to GND (see illustration at below). Otherwise the transceiver does not transmit high power, the output power will be low.

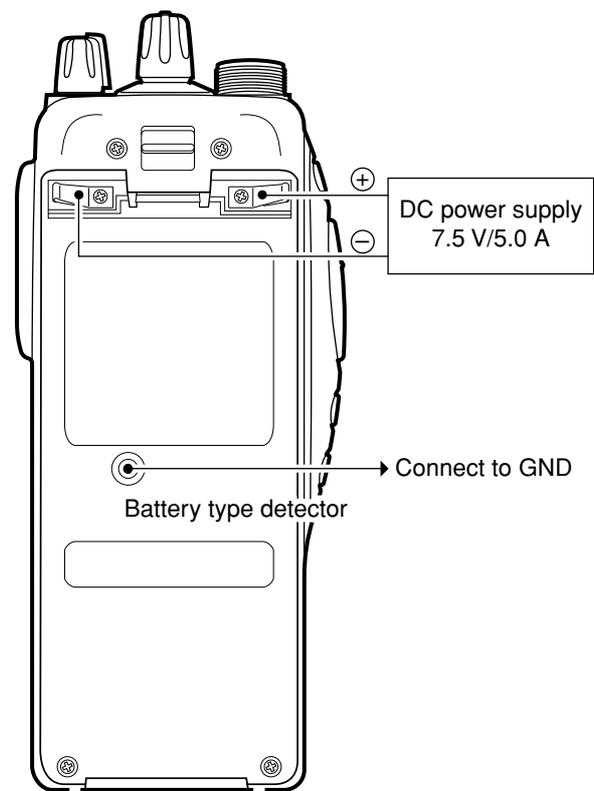

IBM is a registered trademark of International Business Machines Corporation in the U.S.A. and other countries. Microsoft and Windows are registered trademarks of Microsoft Corporation in the U.S.A. and other countries. Screen shots produced with permission from Microsoft Corporation. All other products or brands are registered trademarks or trademarks of their respective holders.

• Screen display example (for conventional version)

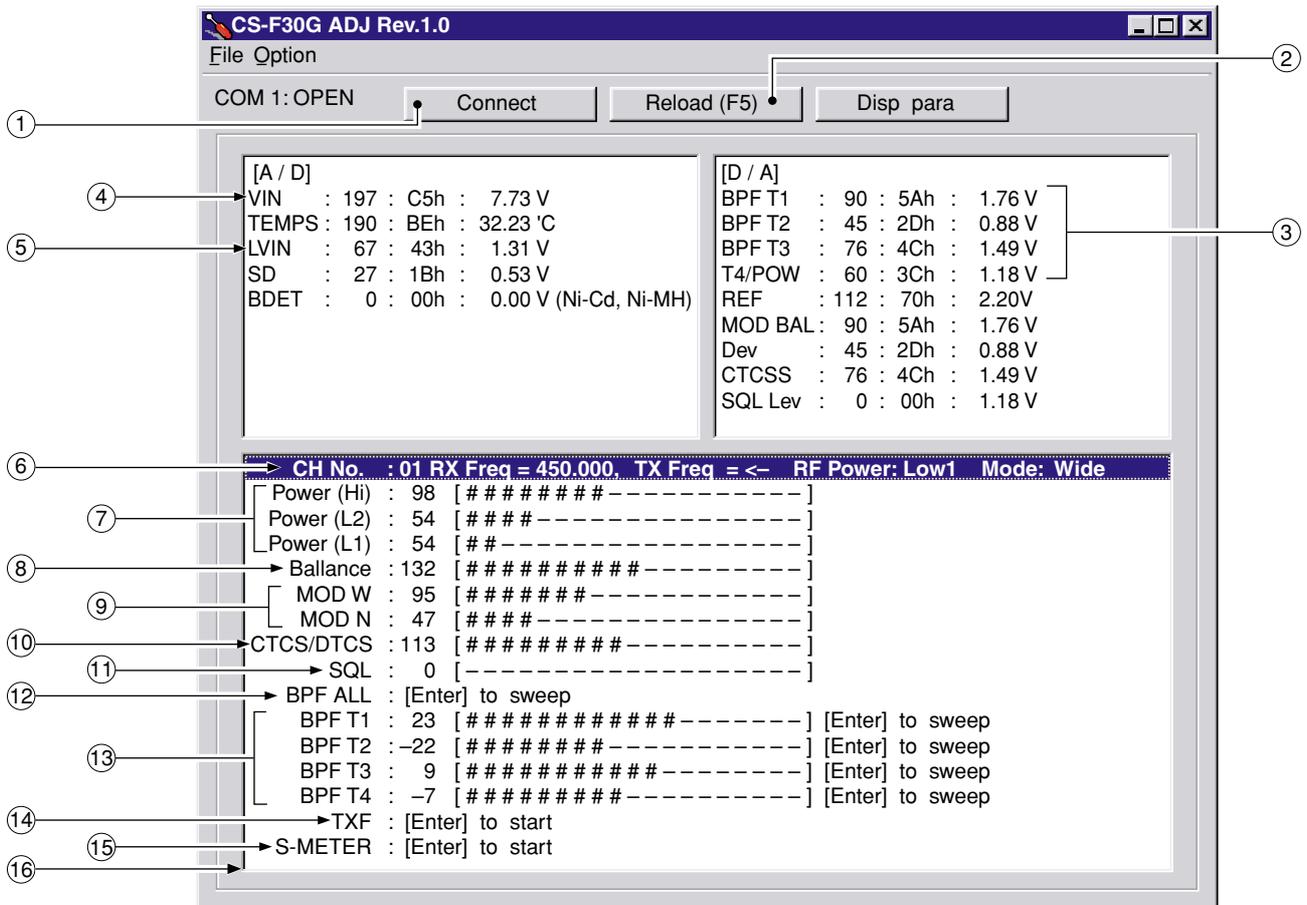

NOTE: The above values for settings are example only.
Each transceiver has its own specific values for each setting.

- | | |
|-------------------------------------|---|
| ① : Transceiver's connection state | ⑨ : FM deviation |
| ② : Reload adjustment data | ⑩ : CTCSS/DTCS deviation |
| ③ : Receive sensitivity measurement | ⑪ : Squelch level |
| ④ : Connected DC voltage | ⑫ : Receive sensitivity (automatically) |
| ⑤ : PLL lock voltage | ⑬ : Receive sensitivity (manually) |
| ⑥ : Operating channel select | ⑭ : Reference frequency |
| ⑦ : RF output power | ⑮ : S-meter |
| ⑧ : Modulation balance | ⑯ : Adjustment items |

5-1-2 MPT VERSION

When you adjust the contents on pages 5-7 to 5-9 SOFTWARE ADJUSTMENT, the optional CS-F40G ADJ ADJUSTMENT SOFTWARE (Rev. 1.0 or later), *OPC-966 JIG CABLE (modified OPC-966 CLONING CABLE) are required. And all adjustments in this section must be performed at conventional mode.

■ REQUIRED TEST EQUIPMENT

EQUIPMENT	GRADE AND RANGE	EQUIPMENT	GRADE AND RANGE
DC power supply	Output voltage : 7.5 V DC Current capacity : 5 A or more	Audio generator	Frequency range : 300–3000 Hz Output level : 1–500 mV
FM deviation meter	Frequency range : DC–600 MHz Measuring range : 0 to ± 10 kHz	Attenuator	Power attenuation : 40 or 50 dB Capacity : 10 W or more
Frequency counter	Frequency range : 0.1–600 MHz Frequency accuracy : ± 1 ppm or better Sensitivity : 100 mV or better	Standard signal generator (SSG)	Frequency range : 300–600 MHz Output level : 0.1 μ V–32 mV (–127 to –17 dBm)
Digital multimeter	Input impedance : 10 M Ω /V DC or better	DC voltmeter	Input impedance : 50 k Ω /V DC or better
RF power meter (terminated type)	Measuring range : 1–10 W Frequency range : 300–600 MHz Impedance : 50 Ω SWR : Less than 1.2 : 1	Oscilloscope	Frequency range : DC–20 MHz Measuring range : 0.01–20 V
		AC millivoltmeter	Measuring range : 10 mV–10 V

■ SYSTEM REQUIREMENTS

- IBM PC compatible computer with an RS -232C serial port (38400 bps or faster).
- Microsoft Windows 95 or Windows 98
- Intel i486DX processor or faster (Pentium 100 MHz or faster recommended)
- At least 16 MB RAM and 10 MB of hard disk space
- 640×480 pixel display (800×600 pixel display recommended)

■ ADJUSTMENT SOFTWARE INSTALLATION


- ① Boot up Windows.
 - Quit all applications when Windows is running.
- ② Insert the 'CS-F40G' into the appropriate drive.
- ③ Select 'Run' from the [Start] menu.
- ④ Type the setup program name using the full path name, then push [Enter] key.
(ex. D:\CSF40GADJ\disk1\Setup.exe)
- ⑤ Follow the prompts.
- ⑥ Program group 'CS-F40G ADJ' appears in the 'Programs' folder of the [Start] menu.

■ STARTING SOFTWARE ADJUSTMENT

- ① Connect IC-F40GT, F40GS, F41GT or F41GS and PC with *OPC-966 JIG CABLE.
- ② When "MAP27" setting is [Disable], turn the transceiver power ON.
When "MAP27" setting is [Enable], turn the transceiver power ON with holding [P0] and [Up] keys.
- ③ Boot up Windows, and click the program group 'CS-F40G ADJ' in the 'Programs' folder of the [Start] menu, then CS-F40G ADJ's window appears.
- ④ Click 'Connect' on the CS-F40G's window, then appears IC-F40GT, F40GS, F41GT or F41GS's up-to-date condition.
- ⑤ Set or modify adjustment data as desired.


• High power transmission

When you adjust the output power (high power), the battery type detector must be connected to GND (see illustration at below). Otherwise the transceiver does not transmit high power, the output power will be low.

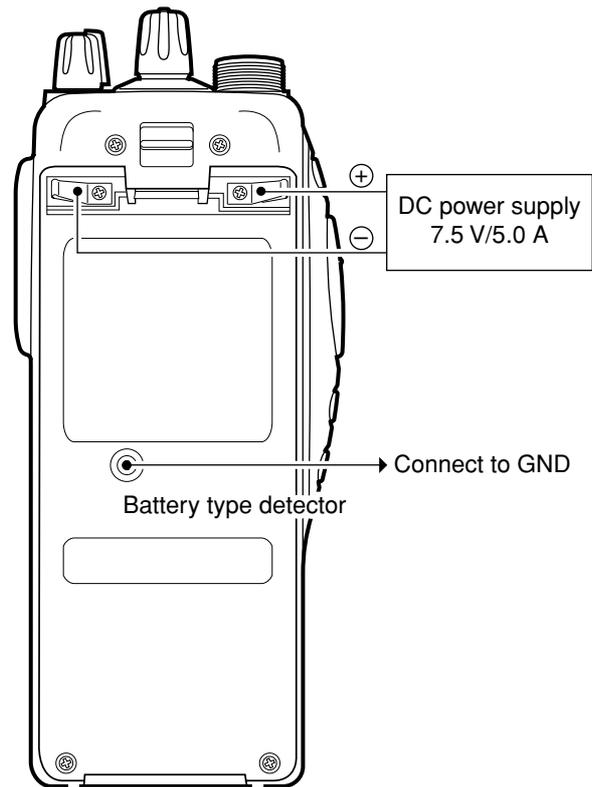

IBM is a registered trademark of International Business Machines Corporation in the U.S.A. and other countries. Microsoft and Windows are registered trademarks of Microsoft Corporation in the U.S.A. and other countries. Screen shots produced with permission from Microsoft Corporation. All other products or brands are registered trademarks or trademarks of their respective holders.


• Screen display example (for MPT version)

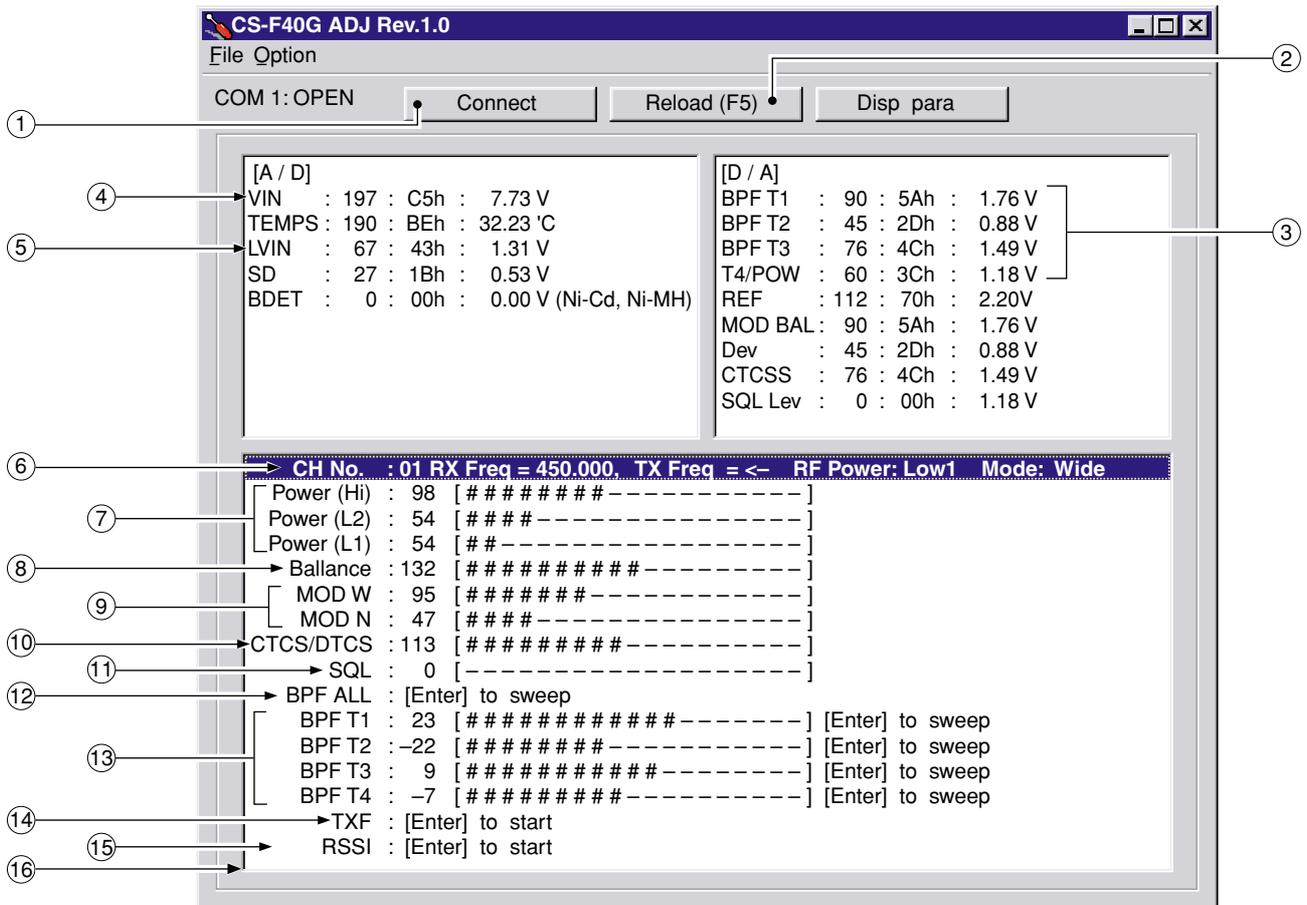


NOTE: The above values for settings are example only.
Each transceiver has its own specific values for each setting.

- | | |
|-------------------------------------|---|
| ① : Transceiver's connection state | ⑨ : FM deviation |
| ② : Reload adjustment data | ⑩ : CTCSS/DTCS deviation |
| ③ : Receive sensitivity measurement | ⑪ : Squelch level |
| ④ : Connected DC voltage | ⑫ : Receive sensitivity (automatically) |
| ⑤ : PLL lock voltage | ⑬ : Receive sensitivity (manually) |
| ⑥ : Operating channel select | ⑭ : Reference frequency |
| ⑦ : RF output power | ⑮ : RSSI L0/L2 |
| ⑧ : Modulation balance | ⑯ : Adjustment items |

• Connection (common)

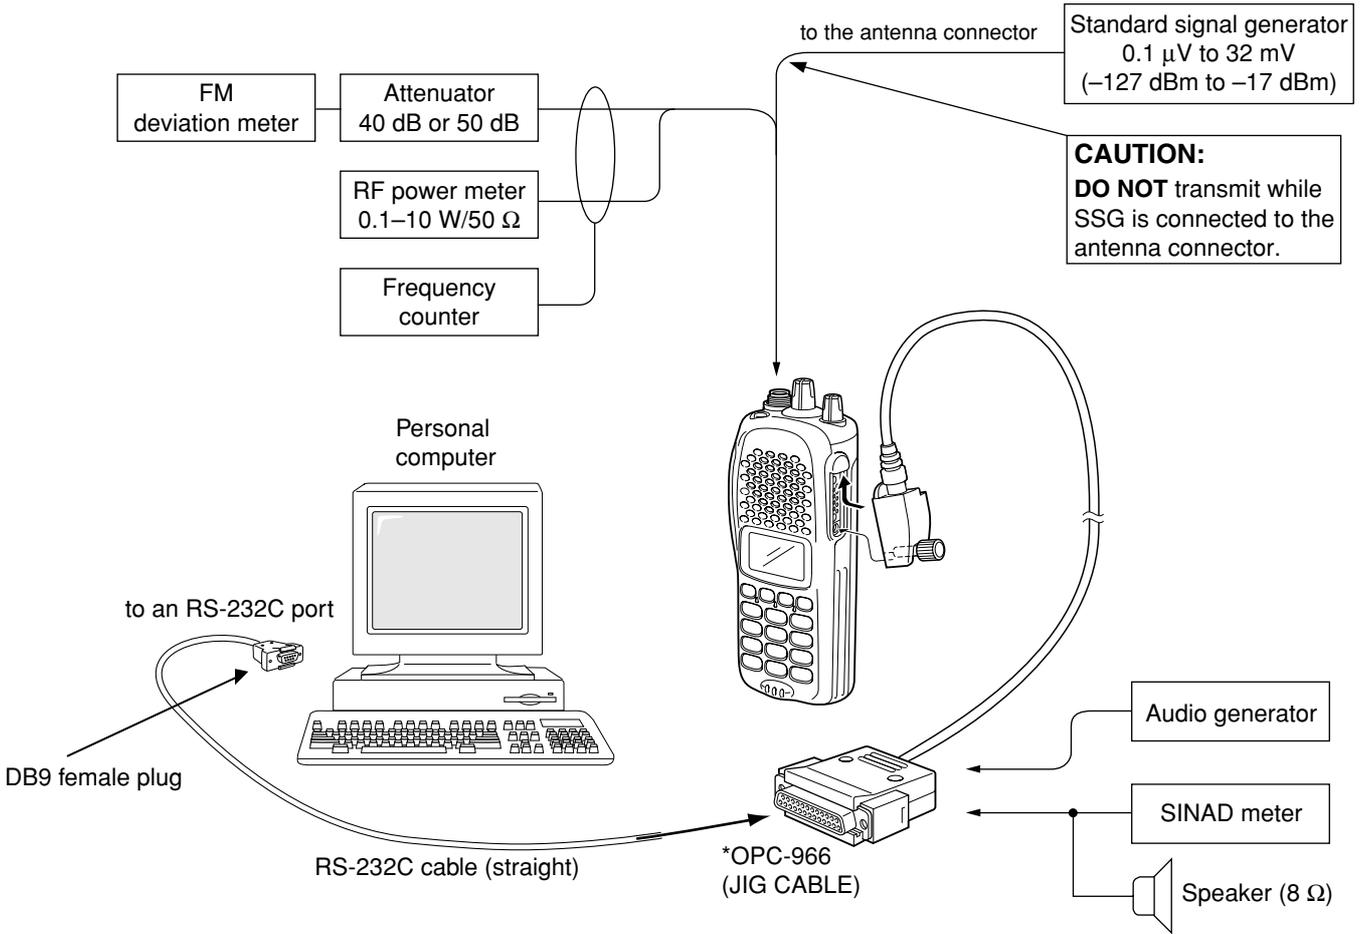


• *OPC-966 (JIG CABLE)

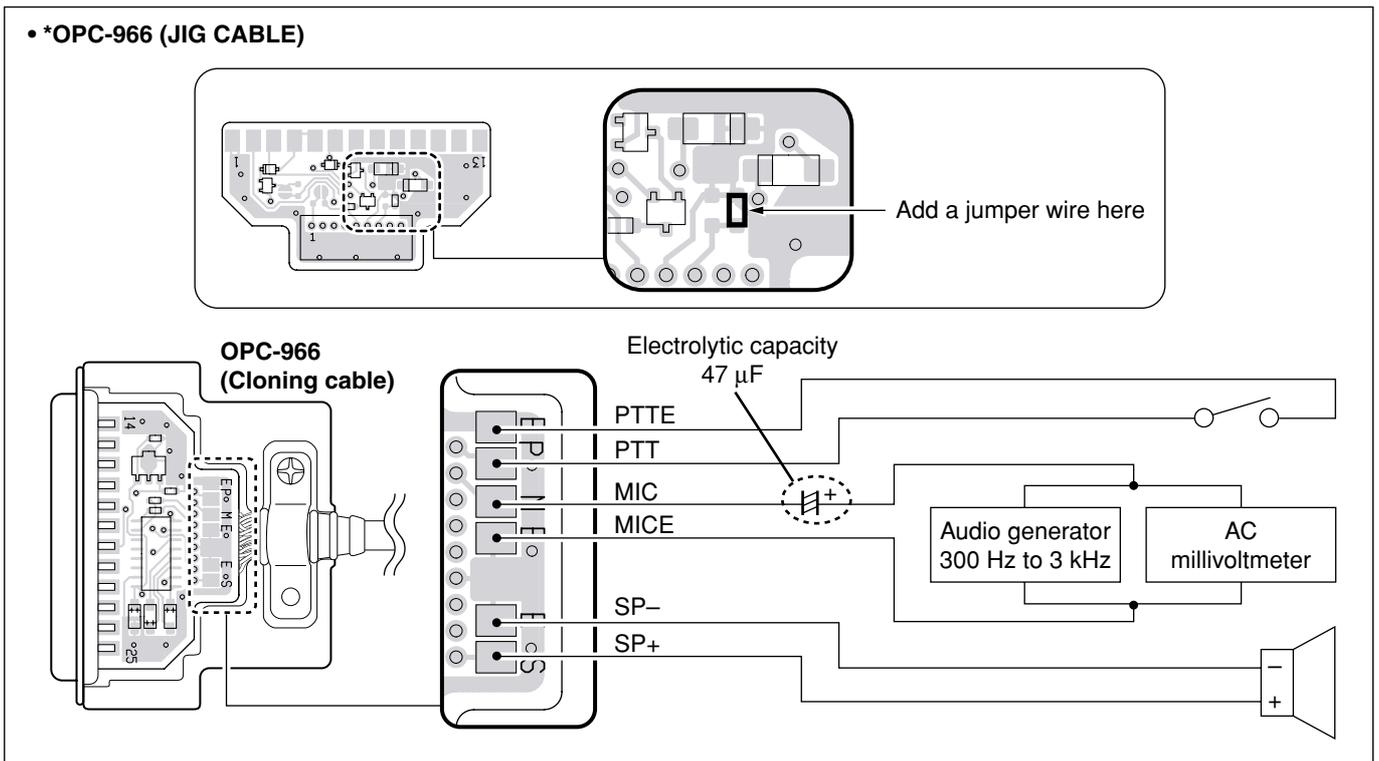

5-2 PLL ADJUSTMENT

ADJUSTMENT	ADJUSTMENT CONDITIONS	MEASUREMENT		VALUE	ADJUSTMENT		
		UNIT	LOCATION		UNIT	ADJUST	
PLL LOCK VOLTAGE	1 • Operating freq. : 400.000 MHz [L] 440.000 MHz [ML] 450.000 MHz [MH] 480.000 MHz [H] • Receiving	MAIN	Connect a digital multi-meter or an oscilloscope to the check point, "CP7".	1.3 V	MAIN	C372	
	2 • Transmitting					1.3 V	C373
	3 • Operating freq. : 430.000 MHz [L] 480.000 MHz [ML] 490.000 MHz [MH] 520.000 MHz [H] • Receiving					2.5–4.0 V [L] 3.0–4.5 V other	Verify
	4 • Transmitting					3.0–4.5 V	

• MAIN unit

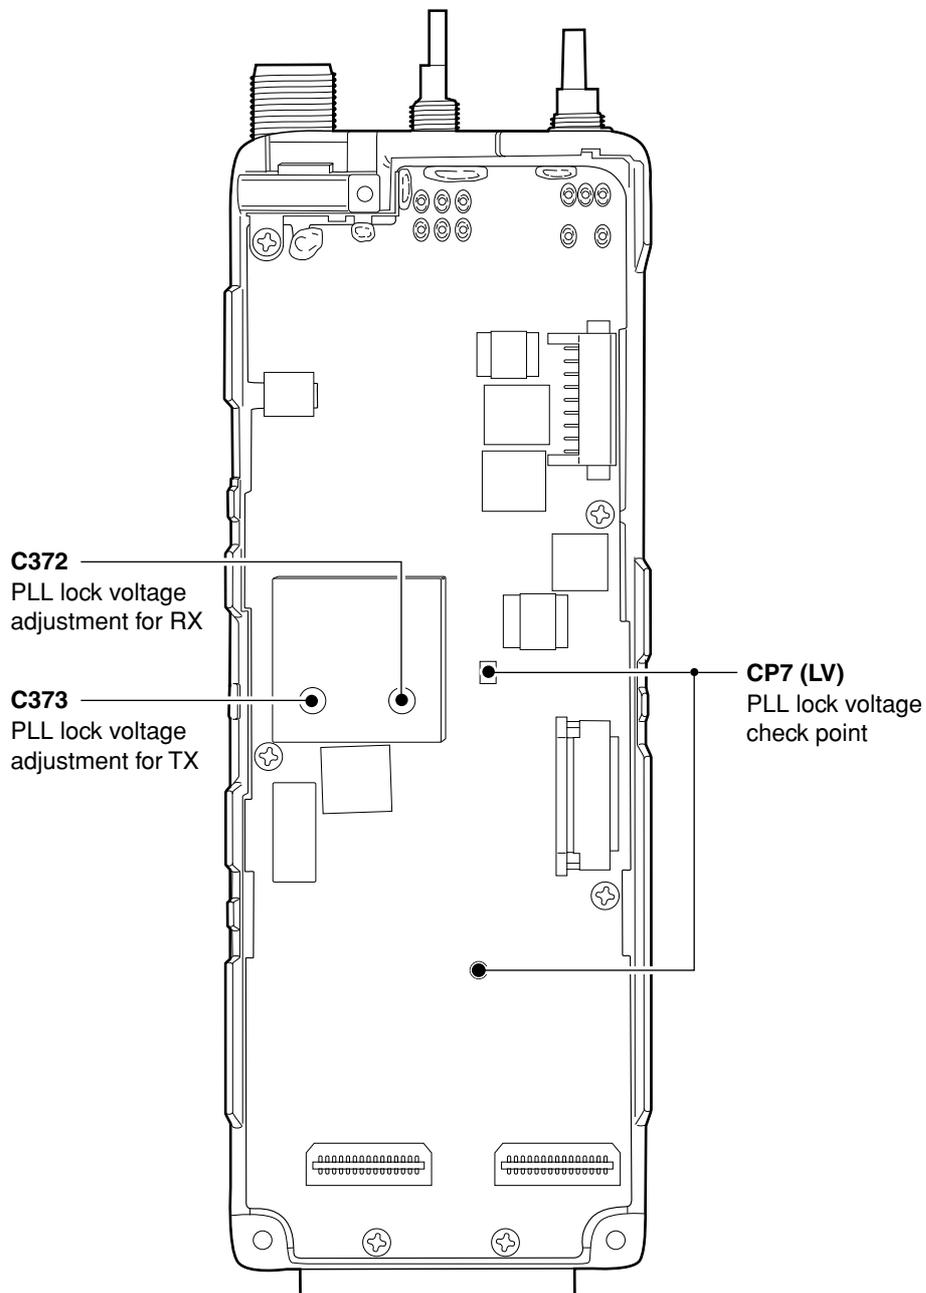

SOFTWARE ADJUSTMENT – continued

Select an operation using [↑] / [↓] keys, then set specified value using [←] / [→] keys on the connected computer keyboard.

ADJUSTMENT	ADJUSTMENT CONDITION	MEASUREMENT		VALUE
		UNIT	LOCATION	
CTCSS/DTCS DEVIATION [CTCS/DTCS]	1 <ul style="list-style-type: none"> • Operating freq. : 400.000 MHz [L] <li style="padding-left: 2.5em;">440.000 MHz [ML] <li style="padding-left: 2.5em;">450.000 MHz [MH] <li style="padding-left: 2.5em;">480.000 MHz [H] • Output power : Low1 • CTCSS : 88.5 Hz • DTCS code : 007 • Set the FM deviation meter as: <ul style="list-style-type: none"> HPF : OFF LPF : 20 kHz De-emphasis: OFF Detector : (P-P)/2 • No audio applied to the [MIC] input. • Transmitting 	Top panel	Connect an FM deviation meter to the antenna connector through the attenuator.	±0.70 kHz [Wide] Ⓐ ±0.56 kHz [Wide] Ⓑ ±0.35 kHz [Narrow]
RX SENSITIVITY [BPF T1] – [BPF T4]	1 <ul style="list-style-type: none"> • Operating freq. : 400.000 MHz [L] <li style="padding-left: 2.5em;">440.000 MHz [ML] <li style="padding-left: 2.5em;">450.000 MHz [MH] <li style="padding-left: 2.5em;">480.000 MHz [H] • IF bandwidth : Wide • Connect a standard signal generator to the antenna connector and set as: <ul style="list-style-type: none"> Frequency : 400.000 MHz [L] <li style="padding-left: 2.5em;">440.000 MHz [ML] <li style="padding-left: 2.5em;">450.000 MHz [MH] <li style="padding-left: 2.5em;">480.000 MHz [H] Level : 10 μV* (-87 dBm) Modulation : 1 kHz Deviation : ±3.5 kHz Ⓐ <li style="padding-left: 2.5em;">±2.8 kHz Ⓑ • Receiving <p>CONVENIENT: The BPF T1–BPF T4 can be adjusted automatically.</p> <p>①-1: Set the cursor to “BPF ALL” on the adjustment program and then push [ENTER] key. ①-2: The connected PC tunes BPF T1–BPF T4 to peak levels. or ②-1: Set the cursor to one of BPF T1, T2, T3, or T4 as desired. ②-2: Push [ENTER] key to start tuning. ②-3: Repeat ②-1 and ②-2 to perform additional BPF tuning.</p> <p>NOTE: After “RX SENSITIVITY” adjustment is finished, “S-METER (or RSSI L0/L2—[MPT])” adjustment (at page 5-9) must be re-adjusted.</p>	MAIN	Connect a SINAD meter with an 8 Ω load to the multi connector through the JIG cable (see page 5-5).	Minimum distortion level

*The output level of the standard signal generator (SSG) is indicated as the SSG’s open circuit.

Ⓐ: W/N version, Ⓑ: M/N version

SOFTWARE ADJUSTMENT – continued

Select an operation using [↑] / [↓] keys, then set specified value using [←] / [→] keys on the connected computer keyboard.
 “S-METER (or RSSI L0/L2—[MPT])” adjustment must be performed after “RX SENSITIVITY” adjustment (at page 5-8) is finished.

ADJUSTMENT	ADJUSTMENT CONDITION	MEASUREMENT		VALUE	
		UNIT	LOCATION		
S-METER [S-METER] RSSI L0/L2—[MPT] [RSSI]	1	<ul style="list-style-type: none"> • Operating freq. : 400.000 MHz [L] <li style="padding-left: 100px;">440.000 MHz [ML] <li style="padding-left: 100px;">450.000 MHz [MH] <li style="padding-left: 100px;">480.000 MHz [H] • IF bandwidth : Wide • Connect an SSG to the antenna connector and set as: <ul style="list-style-type: none"> Frequency : 400.000 MHz [L] <li style="padding-left: 100px;">440.000 MHz [ML] <li style="padding-left: 100px;">450.000 MHz [MH] <li style="padding-left: 100px;">480.000 MHz [H] Level : 14 μV* (-84 dBm) Modulation : 1 kHz Deviation : \pm3.5 kHz (A) <li style="padding-left: 100px;">\pm2.8 kHz (B) • Receiving 			Push [ENTER] key on the connected computer keyboard to set “S3 level (or L2 level—[MPT])”.
	2	<ul style="list-style-type: none"> • Set an SSG as : <ul style="list-style-type: none"> Level : 0.45 μV* (-114 dBm) Modulation : 1 kHz Deviation : \pm3.5 kHz (A) <li style="padding-left: 100px;">\pm2.8 kHz (B) • Receiving 			
SQUELCH LEVEL [SQL]	1	<ul style="list-style-type: none"> • Operating freq. : 415.000 MHz [L] <li style="padding-left: 100px;">460.000 MHz [ML] <li style="padding-left: 100px;">470.000 MHz [MH] <li style="padding-left: 100px;">496.000 MHz [H1] <li style="padding-left: 100px;">500.000 MHz [H2] • IF bandwidth : Wide • Connect an SSG to the antenna connector and set as: <ul style="list-style-type: none"> Frequency : 415.000 MHz [L] <li style="padding-left: 100px;">460.000 MHz [ML] <li style="padding-left: 100px;">470.000 MHz [MH] <li style="padding-left: 100px;">496.000 MHz [H1] <li style="padding-left: 100px;">500.000 MHz [H2] Level : 0.2 μV* (-121 dBm) Modulation : 1 kHz Deviation : \pm3.5 kHz (A) <li style="padding-left: 100px;">\pm2.8 kHz (B) • Receiving 	Front panel	Internal speaker	Set “SQL level” to close squelch. Then set “SQL level” at the point where the audio signals just appears.

*The output level of the standard signal generator (SSG) is indicated as the SSG’s open circuit.

(A): W/N version, (B): M/N version

SECTION 6 PARTS LIST

[FRONT UNIT]

REF NO.	ORDER NO.	DESCRIPTION		M.
IC1	1130009860	S.IC	TC74VHC373FT (EL)	T
IC2	1110002750	S.IC	TA75S01F (TE85R)	T
Q1	1530002850	S.TRANSISTOR	2SC4116-BL (TE85R)	T
Q2	1530002850	S.TRANSISTOR	2SC4116-BL (TE85R)	T
Q3	1590002150	S.TRANSISTOR	DTC144TE TL	T
Q4	1590002150	S.TRANSISTOR	DTC144TE TL	T
Q5	1590002150	S.TRANSISTOR	DTC144TE TL	T
Q6	1560001130	S.FET	CPH3403-TL	T
Q7	1560001130	S.FET	CPH3403-TL	T
Q8	1530002060	S.TRANSISTOR	2SC4081 T106 R	T
Q9	1590000430	S.TRANSISTOR	DTC144EUA T106	T
D1	1790001280	S.DIODE	MA111 (TX)	T
D2	1790001280	S.DIODE	MA111 (TX)	T
D3	1790001200	S.DIODE	MA6S121 (TX)	T
D4	1790001280	S.DIODE	MA111 (TX)	T
R1	7030009190	S.RESISTOR	RR0510P-332-D (3.3 kΩ)	T
R2	7030005030	S.RESISTOR	ERJ2GEJ 152 X (1.5 kΩ)	T
R3	7030007250	S.RESISTOR	ERJ2GEJ 220 X (22 Ω)	T
R4	7030009150	S.RESISTOR	ERJ2GEJ 824 X (820 kΩ)	T
R5	7030009150	S.RESISTOR	ERJ2GEJ 824 X (820 kΩ)	T
R6	7030006610	S.RESISTOR	ERJ2GEJ 394 X (390 kΩ)	T
R7	7030008310	S.RESISTOR	ERJ2GEJ 564 X (560 kΩ)	T
R8	7030008370	S.RESISTOR	ERJ2GEJ 561 X (560 Ω)	T
R9	7030004990	S.RESISTOR	ERJ2GEJ 221 X (220 Ω)	T
R10	7030005030	S.RESISTOR	ERJ2GEJ 152 X (1.5 kΩ)	T
R11	7030009190	S.RESISTOR	RR0510P-332-D (3.3 kΩ)	T
R12	7030005060	S.RESISTOR	ERJ2GEJ 333 X (33 kΩ)	T
R13	7030007280	S.RESISTOR	ERJ2GEJ 331 X (330 Ω)	T
R14	7030005090	S.RESISTOR	ERJ2GEJ 104 X (100 kΩ)	T
R17	7030005090	S.RESISTOR	ERJ2GEJ 104 X (100 kΩ)	T
R18	7410000750	S.ARRAY	EXB-V4V 104JV (100 kΩ)	T
R20	7030005170	S.RESISTOR	ERJ2GEJ 474 X (470 kΩ)	T
R21	7030005090	S.RESISTOR	ERJ2GEJ 104 X (100 kΩ)	T
R22	7030005170	S.RESISTOR	ERJ2GEJ 474 X (470 kΩ)	T
R23	7030005050	S.RESISTOR	ERJ2GEJ 103 X (10 kΩ)	T
R24	7030005240	S.RESISTOR	ERJ2GEJ 473 X (47 kΩ)	T
R25	7030008300	S.RESISTOR	ERJ2GEJ 184 X (180 kΩ)	T
R26	7030007340	S.RESISTOR	ERJ2GEJ 153 X (15 kΩ)	T
R27	7030008010	S.RESISTOR	ERJ2GEJ 123 X (12 kΩ)	T
C1	4030016930	S.CERAMIC	ECJ0EB1A104K	T
C2	4030016930	S.CERAMIC	ECJ0EB1A104K	T
C3	4030016930	S.CERAMIC	ECJ0EB1A104K	T
C4*	4550006150	S.TANTALUM	ECST1CY105R	T
C6*	4550006150	S.TANTALUM	ECST1CY105R	T
C7*	4550006150	S.TANTALUM	ECST1CY105R	T
C8*	4550006150	S.TANTALUM	ECST1CY105R	T
C9*	4550006150	S.TANTALUM	ECST1CY105R	T
C10*	4550006150	S.TANTALUM	ECST1CY105R	T
C11*	4550006150	S.TANTALUM	ECST1CY105R	T
C12	4030014180	S.CERAMIC	ECUE1H470JCQ	T
C13	4030014180	S.CERAMIC	ECUE1H470JCQ	T
C14	4030014180	S.CERAMIC	ECUE1H470JCQ	T
C15	4030014180	S.CERAMIC	ECUE1H470JCQ	T
C16	4030013850	S.CERAMIC	ECUE1E102KBQ	T
C17	4030014180	S.CERAMIC	ECUE1H470JCQ	T
C18	4030014180	S.CERAMIC	ECUE1H470JCQ	T
C19	4030016930	S.CERAMIC	ECJ0EB1A104K	T
C20	4030014180	S.CERAMIC	ECUE1H470JCQ	T
C21*	4550006150	S.TANTALUM	ECST1CY105R	T
C22	4030016930	S.CERAMIC	ECJ0EB1A104K	T
C23*	4550006150	S.TANTALUM	ECST1CY105R	T
C24	4030014430	S.CERAMIC	C1005 JB 1C 153K-T-A	T
C25	4030014180	S.CERAMIC	ECUE1H470JCQ	T
C26	4030016930	S.CERAMIC	ECJ0EB1A104K	T
C27	4030017230	S.CERAMIC	ECUE1E271KBQ	T
C28	4030009820	S.CERAMIC	C1005 JB 1E 103K-T-A	T
C29	4030013850	S.CERAMIC	ECUE1E102KBQ	T
C30	4030016930	S.CERAMIC	ECJ0EB1A104K	T
J1	6510022360	S.CONNECTOR	26FLZ-SM1-TB	T
J2	6510022200	S.CONNECTOR	40FLZ-SM1-R-TB	T

[FRONT UNIT]

REF NO.	ORDER NO.	DESCRIPTION		M.
DS1	5010000160	S.LED	LNJ310M6URA	B
DS2	5010000160	S.LED	LNJ310M6URA	B
DS3	5010000160	S.LED	LNJ310M6URA	B
DS4	5010000160	S.LED	LNJ310M6URA	B
DS5	5040002170	S.LED	LNJ210C6ARA	B
DS6	5010000120	S.LED	LN1371G-(TR)	[GT] only B
DS7	5010000120	S.LED	LN1371G-(TR)	[GT] only B
DS8	5010000120	S.LED	LN1371G-(TR)	[GT] only B
DS9	5010000120	S.LED	LN1371G-(TR)	[GT] only B
DS10	5030001870	LCD	EDMMUD1FA0	B
DS11	5010000120	S.LED	LN1371G-(TR)	[GT] only B
DS12	5010000120	S.LED	LN1371G-(TR)	[GT] only B
DS13	5010000160	S.LED	LNJ310M6URA	B
DS14	5010000120	S.LED	LN1371G-(TR)	[GS] only B
DS15	5010000120	S.LED	LN1371G-(TR)	[GS] only B
MC1	7700002310	MICROPHONE	EM-140	B
S1	2230001060	S.SWITCH	EVQ-PUL 02K	T
S2	2230001060	S.SWITCH	EVQ-PUL 02K	T
S3	2230001060	S.SWITCH	EVQ-PUL 02K	T
S4	2230001060	S.SWITCH	EVQ-PUL 02K	T
S5	2230001060	S.SWITCH	EVQ-PUL 02K	T
SP1	2510001060	SPEAKER	K036NA500-47	B
W1	7120000470	JUMPER	ERDS2T0	T
W3	7030003860	S.RESISTOR	ERJ3GE JPW V	T
EP1	0910055267	PCB	B 5489G	

[L]: L-band, [ML]: ML-band, [MH]: MH-band, [H]: H-band, [M]: ML and MH bands, [GT]: IC-F40GT/F41GT, [GS]: IC-F40GS/F41GS, [F40G]: IC-F40GT/F40GS, [F41G]: IC-F41GT/F41GS, [IS]: Intrinsically safe version, [BIIS]: BIIS version

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
 *=Safety critical components
 S.=Surface mount

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.
IC1	1130009130	S.IC SA7025DK-T	T
IC2	1130008560	S.IC TC75S51F (TE85L)	B
IC3	1110003490	S.IC TA31136FN (D,EL)	B
IC4	1130008560	S.IC TC75S51F (TE85L)	T
IC5	1110001810	S.IC TA7368F (ER)	B
IC6	1110002750	S.IC TA75S01F (TE85R)	T
IC7	1110002750	S.IC TA75S01F (TE85R)	B
IC8	1130008560	S.IC TC75S51F (TE85L)	B
IC9	1130009330	S.IC TC35453F (BR,DRY)	B
IC10	1110002750	S.IC TA75S01F (TE85R)	B
IC12	1110003390	S.IC AN8005M-(E1)	B
IC13	1190001350	S.IC M62364FP 600D	B
IC14	1140010140	S.IC HD64F2238BFA13	B
IC15	1110005770	S.IC S-80942CNMC-G9C-T2	B
IC16	1140008650	S.IC HN58X2464T1	B
IC17	1130009700	S.IC LC73872M-TRM	B
IC18	1110002750	S.IC TA75S01F (TE85R)	T
IC19	1130009980	S.IC TC7W53FK (TE85L)	T
IC20	1110003800	S.IC NJM2904V-TE1	B
IC21	1110002750	S.IC TA75S01F (TE85R)	T
IC23	1130007570	S.IC BU4094BCFV-E2	B
IC24	1140008650	S.IC HN58X2464T1	B
IC25	1130009980	S.IC TC7W53FK (TE85L)	T
IC26	1130009980	S.IC TC7W53FK (TE85L)	T
IC27	1190001340	S.IC M62334FP 600C	T
IC28	1130009980	S.IC TC7W53FK (TE85L)	T
IC29	1130009980	S.IC TC7W53FK (TE85L)	T
IC30	1130007020	S.IC TC7S66FU (TE85R)	T
IC31	1130008560	S.IC TC75S51F (TE85L)	T
Q1	1560001050	S.FET 2SK2974	T
Q2	1560001020	S.FET 2SK2973 (MTS101P)	T
Q3	1530002620	S.TRANSISTOR 2SC3585-T1B R44	T
Q5	1530003310	S.TRANSISTOR 2SC5107-O (TE85R)	B
Q6	1530003310	S.TRANSISTOR 2SC5107-O (TE85R)	B
Q7	1530003310	S.TRANSISTOR 2SC5107-O (TE85R)	B
Q8	1530003310	S.TRANSISTOR 2SC5107-O (TE85R)	B
Q9	1590000430	S.TRANSISTOR DTC144EUA T106	B
Q10	1590001400	S.TRANSISTOR XP1214 (TX)	B
Q11	1530002920	S.TRANSISTOR 2SC4226-T1 R25	T
Q12	1530002920	S.TRANSISTOR 2SC4226-T1 R25	T
Q13	1530002850	S.TRANSISTOR 2SC4116-BL (TE85R)	T
Q14	1560000540	S.FET 2SK880-Y (TE85R)	B
Q15	1530002060	S.TRANSISTOR 2SC4081 T106 R	T
Q16	1590000720	S.TRANSISTOR DTA144EUA T106	T
Q17	1530002060	S.TRANSISTOR 2SC4081 T106 R	B
Q18	1530002600	S.TRANSISTOR 2SC4215-O (TE85R)	B
Q19	1580000430	S.FET 3SK206-T1 U78	B
Q20	1580000730	S.FET 3SK293 (TE85L)	B
Q21	1560000840	S.FET 2SK1829 (TE85R)	B
Q22	1590000720	S.TRANSISTOR DTA144EUA T106	B
Q23	1520000460	S.TRANSISTOR 2SB1132 T100 R	T
Q24	1590001190	S.TRANSISTOR XP6501-(TX) .AB	B
Q26	1590000430	S.TRANSISTOR DTC144EUA T106	B
Q27	1530003090	S.TRANSISTOR 2SC4213-B (TE85R)	B
Q29	1510000580	S.TRANSISTOR 2SA1362-GR (TE85R)	B
Q30	1510000580	S.TRANSISTOR 2SA1362-GR (TE85R)	B
Q31	1510000580	S.TRANSISTOR 2SA1362-GR (TE85R)	B
Q32	1520000460	S.TRANSISTOR 2SB1132 T100 R	B
Q33	1590001190	S.TRANSISTOR XP6501-(TX) .AB	B
Q39	1530002060	S.TRANSISTOR 2SC4081 T106 R	B
Q40	1590001400	S.TRANSISTOR XP1214 (TX)	T
Q41	1590000430	S.TRANSISTOR DTC144EUA T106	T
Q43	1530002060	S.TRANSISTOR 2SC4081 T106 R	T
Q44	1590000430	S.TRANSISTOR DTC144EUA T106	T
Q45	1590002530	S.TRANSISTOR UN911H (TX)	T
Q46	1590000430	S.TRANSISTOR DTC144EUA T106	B
Q47	1530002060	S.TRANSISTOR 2SC4081 T106 R	T
D1	1750000580	S.DIODE 1SV307 (TPH3)	T
D2	1790001670	S.DIODE RB706F-40T106	T
D3	1790001670	S.DIODE RB706F-40T106	T
D4	1790000620	S.DIODE MA77 (TX)	T
D5	1790000620	S.DIODE MA77 (TX)	T
D6	1720000780	S.VARICAP HVU350B TRF	T
D7	1720000400	S.VARICAP 1SV245 (TPH3)	T
D8	1720000780	S.VARICAP HVU350B TRF	T
D9	1720000360	S.DIODE HSU88TRF	B
D10	1160000060	S.DIODE DAN202U T106	T
D13	1160000050	S.DIODE DAP202U T106	B
D14	1160000050	S.DIODE DAP202U T106	T
D15	1160000060	S.DIODE DAN202U T106	T
D16	1160000060	S.DIODE DAN202U T106	T
D17	1790001210	S.DIODE 1SS375-TL	B
D18	1750000720	S.VARICAP HVC375BTRF	B
D19	1750000720	S.VARICAP HVC375BTRF	B

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.
D20	1750000720	S.VARICAP HVC375BTRF	B
D21	1750000720	S.VARICAP HVC375BTRF	B
D22	1790001250	S.DIODE MA2S111-(TX)	B
D23	1790001210	S.DIODE 1SS375-TL	B
D24	1790000620	S.DIODE MA77 (TX)	T
D25	1790000620	S.DIODE MA77 (TX)	T
D26	1790001280	S.DIODE MA111 (TX)	T
D27	1790000620	S.DIODE MA77 (TX)	T
D29	1750000550	S.DIODE 1SS355 TE-17	T
D30	1730002360	S.ZENER MA8062-M (TX)	T
D31	1790001280	S.DIODE MA111 (TX)	B
D33	1790001280	S.DIODE MA111 (TX)	B
D34	1730002360	S.ZENER MA8062-M (TX)	B
D35	1730002360	S.ZENER MA8062-M (TX)	T
D36	1730002360	S.ZENER MA8062-M (TX)	B
D38	1790001280	S.DIODE MA111 (TX)	B
D39	1730002260	S.ZENER MA8030-H (TX)	Other T
	1730002590	S.ZENER MA8033-H (TX) [L]-F41G, [L]-BIIS	T
D40	1790000980	S.DIODE MA742 (TX)	T
F11	2010002310	S.MONOLITH FL-296 (47.250 MHz)	B
F12	2020001490	S.CERAMIC SFPCA450KE4A-R1	T
F13	2020001080	S.CERAMIC SFPCA450KG1A-R1	T
F14	2040001440	S.LC NFE31PT152Z1E9L	T
X1	6050010960	S.XTAL CR-667 (15.600 MHz)	B
X2	6070000190	S.DISCRIMINATOR CDBC450KAY24-R0	T
X3	6050011000	S.XTAL CR-681 (12.288 MHz)	B
X4	6050009910	S.XTAL CR-563 (3.579545 MHz)	T
L1	6200008510	S.COIL 0.30-0.9-4TR 10.5N	B
L2	6200008240	S.COIL 0.30-0.9-5TL 14N	B
L4	6200002850	S.COIL NL 252018T-R82J	B
L5	6200008240	S.COIL 0.30-0.9-5TL 14N	B
L7	6200009470	S.COIL 0.40-0.9-2TL	T
L9	6200003590	S.COIL EXCCL3225U1	B
L14	6200003590	S.COIL EXCCL3225U1	B
L15	6200001640	S.COIL ELJNC 10NK-F	[H] T
	6200001650	S.COIL ELJNC 18NK-F	[M]-F41G, [M]-BIIS T
	6200001750	S.COIL ELJNC 15NK-F	[L]-F40G except BIIS T
	6200001760	S.COIL ELJNC 22NK-F [L]-F41G, [L]-BIIS	T
	6200002470	S.COIL ELJNC 12NK-F	[M]-F40G except BIIS T
L16	6200005660	S.COIL ELJRE 10NG-F	[M], [H] T
	6200005680	S.COIL ELJRE 15NG-F [L]-F41G, [L]-BIIS	T
	6200005730	S.COIL ELJRE 39NG-F	Other T
L17	6200005700	S.COIL ELJRE 22NG-F	Other B
	6200005710	S.COIL ELJRE 27NG-F	[L], [ML], [BIIS] B
L18	6200005700	S.COIL ELJRE 22NG-F	[H] B
	6200005710	S.COIL ELJRE 27NG-F	Other B
L19	6200004660	S.COIL MLF1608A 1R8K-T	B
L20	6200009360	S.COIL 0.45-1.4-3TL 11N	T
L21	6200001980	S.COIL NL 252018T-1R0J	[L] B
	6200002860	S.COIL NL 252018T-4R7J	[M], [H] B
L22	6200004950	S.COIL NL 252018T-1R8J	B
L23	6200009360	S.COIL 0.45-1.4-3TL 11N	T
L24	6200002860	S.COIL NL 252018T-4R7J	B
L25	6200004950	S.COIL NL 252018T-1R8J	T
L26	6200001980	S.COIL NL 252018T-1R0J	T
L27	6200002850	S.COIL NL 252018T-R82J	T
L28	6200004950	S.COIL NL 252018T-1R8J	T
L29	6200005680	S.COIL ELJRE 15NG-F	B
L30	6200004950	S.COIL NL 252018T-1R8J	B
L31	6200004480	S.COIL MLF1608D R82K-T	B
L32	6200005740	S.COIL ELJRE 47NG-F	Other B
	6200006670	S.COIL ELJRE 68NG-F	[L], [ML], [BIIS] B
L33	6200002320	S.COIL LQW31HN8N8J01L	B
L34	6200002320	S.COIL LQW31HN8N8J01L	B
L35	6200001980	S.COIL NL 252018T-1R0J	B
L36	6200002320	S.COIL LQW31HN8N8J01L	B
L37	6200002320	S.COIL LQW31HN8N8J01L	B
L38	6200002370	S.COIL LQW31HN39N01L	[H] B
	6200002820	S.COIL LQW31HN47N01L	Other B
L39	6200009220	S.COIL LQW18AN15NG00D	T
L40	6200009220	S.COIL LQW18AN15NG00D	T
L41	6200003590	S.COIL EXCCL3225U1	B
L42	6200004950	S.COIL NL 252018T-1R8J	B
L43	6200002860	S.COIL NL 252018T-4R7J	B
L44	6200001980	S.COIL NL 252018T-1R0J	B
L45	6200004660	S.COIL MLF1608A 1R8K-T	T
L46	6200004780	S.COIL MLF1608A 1R5K-T	B
L47	6200001980	S.COIL NL 252018T-1R0J	B
L48	6200003960	S.COIL MLF1608A 1R0K-T	B

[L]: L-band, [ML]: ML-band, [MH]: MH-band, [H]: H-band, [M]: ML and MH bands, [GT]: IC-F40GT/F41GT, [GS]: IC-F40GS/F41GS, [F40G]: IC-F40GT/F40GS, [F41G]: IC-F41GT/F41GS, [IS]: Intrinsically safe version, [BIIS]: BIIS version

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side) * =Safety critical components S.=Surface mount

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.
L49	6200003960	S.COIL MLF1608A 1R0K-T	B
L50	6200005700	S.COIL ELJRE 22NG-F	T
L51	6200005590	S.COIL ELJRE 2N7Z-F	Other B
	6200006770	S.COIL ELJRE 1N5Z-F	[M], [H] B
	6200006780	S.COIL ELJRE 1N8Z-F	[L]-F41G, [L]-BIIS B
L53	6200007920	S.COIL ELJRF 15NJF2	[F41G], [BIIS] only T
L54	6200007920	S.COIL ELJRF 15NJF2	[F41G], [BIIS] only T
L55	6200003960	S.COIL MLF1608A 1R0K-T	T
L56	6200006190	S.COIL BLM21PG300SN1D	[F41G], [BIIS] only T
L57	6200007920	S.COIL ELJRF 15NJF2	[F41G], [BIIS] only T
L58	6200007920	S.COIL ELJRF 15NJF2	[F41G], [BIIS] only B
L59	6200007930	S.COIL ELJRF 12NJF2	[F41G], [BIIS] only B
R1	7030000610	S.RESISTOR MCR10EZHZJ 82 kΩ	B
R2	7030000290	S.RESISTOR MCR10EZHZJ 180 Ω (181)	B
R3	7030003480	S.RESISTOR ERJ3GEYJ 222 V (2.2 kΩ)	B
R4	7030003480	S.RESISTOR ERJ3GEYJ 222 V (2.2 kΩ)	B
R5	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	T
R6	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	T
R8	7030005720	S.RESISTOR ERJ2GEJ 563 X (56 kΩ)	[F41G], [BIIS] T
R10	7030007340	S.RESISTOR ERJ2GEJ 153 X (15 kΩ)	Other T
	7030004980	S.RESISTOR ERJ2GEJ 101 X (100 Ω)	Other T
	7030004990	S.RESISTOR ERJ2GEJ 221 X (220 Ω)	T
	7030005000	S.RESISTOR ERJ2GEJ 471 X (470 Ω)	[M]-F41G, [M]-BIIS T
R11	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	[L]-F41G, [L]-BIIS T
R12	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	T
R13	7030005000	S.RESISTOR ERJ2GEJ 471 X (470 Ω)	[L]-F41G, [L]-BIIS T
	7030009320	S.RESISTOR ERJ2GEJ 4R7 X (4.7 Ω)	[M]-F41G, [M]-BIIS T
R14	7030005530	S.RESISTOR ERJ2GEJ 100 X (10 Ω)	T
R15	7030005040	S.RESISTOR ERJ2GEJ 472 X (4.7 kΩ)	T
R16	7030004990	S.RESISTOR ERJ2GEJ 221 X (220 Ω)	T
R17	7030005720	S.RESISTOR ERJ2GEJ 563 X (56 kΩ)	T
R18	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	B
R19	7030004980	S.RESISTOR ERJ2GEJ 101 X (100 Ω)	T
R20	7030005040	S.RESISTOR ERJ2GEJ 472 X (4.7 kΩ)	T
R21	7030004980	S.RESISTOR ERJ2GEJ 101 X (100 Ω)	B
R22	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	B
R23	7030007250	S.RESISTOR ERJ2GEJ 220 X (22 Ω)	[F40G]-except BIIS only B
R24	7030004990	S.RESISTOR ERJ2GEJ 221 X (220 Ω)	B
R25	7030005070	S.RESISTOR ERJ2GEJ 683 X (68 kΩ)	B
R26	7030004990	S.RESISTOR ERJ2GEJ 221 X (220 Ω)	T
R27	7030004990	S.RESISTOR ERJ2GEJ 221 X (220 Ω)	[F40G]-except BIIS only T
R28	7030005070	S.RESISTOR ERJ2GEJ 683 X (68 kΩ)	T
R29	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	B
R30	7030010990	S.RESISTOR RR0510P-272-D	T
R31	7030009190	S.RESISTOR RR0510P-332-D (3.3 kΩ)	T
R33	7030005710	S.RESISTOR ERJ2GEJ 121 X (120 Ω)	[L] B
	7030008280	S.RESISTOR ERJ2GEJ 271 X (270 Ω)	[M], [H] B
R34	7030009190	S.RESISTOR RR0510P-332-D (3.3 kΩ)	T
R35	7030009190	S.RESISTOR RR0510P-332-D (3.3 kΩ)	T
R36	7030009320	S.RESISTOR ERJ2GEJ 4R7 X (4.7 Ω)	T
R37	7030007280	S.RESISTOR ERJ2GEJ 331 X (330 Ω)	[H] B
	7030009280	S.RESISTOR ERJ2GE 391 X (390 Ω)	Other B
R38	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	Other T
	7030007290	S.RESISTOR ERJ2GEJ 222 X (2.2 kΩ)	[M] T
R39	7030005530	S.RESISTOR ERJ2GEJ 100 X (10 Ω)	B
R40	7030005530	S.RESISTOR ERJ2GEJ 100 X (10 Ω)	B
R41	7030005110	S.RESISTOR ERJ2GEJ 224 X (220 kΩ)	B
R42	7030005530	S.RESISTOR ERJ2GEJ 100 X (10 Ω)	B
R43	7030009700	S.RESISTOR ERJ2GEJ 202 X (2 kΩ)	B
R44	7030008410	S.RESISTOR ERJ2GEJ 392 X (3.9 kΩ)	B
R45	7030005530	S.RESISTOR ERJ2GEJ 100 X (10 Ω)	B
R46	7030008010	S.RESISTOR ERJ2GEJ 123 X (12 kΩ)	T
R47	7030009710	S.RESISTOR ERJ2GEJ 203 X (20 kΩ)	T
R48	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	B
R49	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	B
R50	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	B
R51	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	B
R52	7030004980	S.RESISTOR ERJ2GEJ 101 X (100 Ω)	B
R53	7030005110	S.RESISTOR ERJ2GEJ 224 X (220 kΩ)	B
R54	7030004980	S.RESISTOR ERJ2GEJ 101 X (100 Ω)	B
R55	7030005220	S.RESISTOR ERJ2GEJ 223 X (22 kΩ)	T

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.
R57	7030009700	S.RESISTOR ERJ2GEJ 202 X (2 kΩ)	B
R58	7410000950	S.ARRAY EXB-V8V 102JV	T
R59	7030009700	S.RESISTOR ERJ2GEJ 202 X (2 kΩ)	T
R60	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R61	7030007060	S.RESISTOR ERJ2GEJ 684X (680 kΩ)	T
R62	7030007570	S.RESISTOR ERJ2GEJ 122X (1.2 kΩ)	T
R63	7030005580	S.RESISTOR ERJ2GEJ 560 X (56 Ω)	B
R64	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	T
R65	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	T
R66	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	T
R67	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R69	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R73	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	B
R75	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	B
R77	7030007340	S.RESISTOR ERJ2GEJ 153 X (15 kΩ)	T
R78	7030005220	S.RESISTOR ERJ2GEJ 223 X (22 kΩ)	T
R79	7030008010	S.RESISTOR ERJ2GEJ 123 X (12 kΩ)	T
R80	7030005220	S.RESISTOR ERJ2GEJ 223 X (22 kΩ)	T
R81	7030009320	S.RESISTOR ERJ2GEJ 4R7 X (4.7 Ω)	T
R82	7030007340	S.RESISTOR ERJ2GEJ 153 X (15 kΩ)	B
R83	7030007350	S.RESISTOR ERJ2GEJ 393 X (39 kΩ)	B
R85	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	B
R86	7030005100	S.RESISTOR ERJ2GEJ 154 X (150 kΩ)	B
R87	7030009270	S.RESISTOR ERJ2GEJ 821 X (820 Ω)	T
R88	7030005220	S.RESISTOR ERJ2GEJ 223 X (22 kΩ)	B
R89	7030005030	S.RESISTOR ERJ2GEJ 152 X (1.5 kΩ)	T
R90	7030004970	S.RESISTOR ERJ2GEJ 470 X (47 Ω)	T
R91	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	T
R92	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	B
R93	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	B
R94	7030007570	S.RESISTOR ERJ2GEJ 122X (1.2 kΩ)	B
R96	7030007290	S.RESISTOR ERJ2GEJ 222 X (2.2 kΩ)	T
R97	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	T
R98	7030005310	S.RESISTOR ERJ2GEJ 124 X (120 kΩ)	B
R99	7030008280	S.RESISTOR ERJ2GEJ 271 X (270 Ω)	B
R101	7030008410	S.RESISTOR ERJ2GEJ 392 X (3.9 kΩ)	B
R103	7030004990	S.RESISTOR ERJ2GEJ 221 X (220 Ω)	B
R104	7030009710	S.RESISTOR ERJ2GEJ 203 X (20 kΩ)	B
R105	7030005040	S.RESISTOR ERJ2GEJ 472 X (4.7 kΩ)	B
R106	7030009270	S.RESISTOR ERJ2GEJ 821 X (820 Ω)	B
R107	7030010130	S.RESISTOR ERJ2GE 6R8 X (6.8 Ω)	B
R108	7030009270	S.RESISTOR ERJ2GEJ 821 X (820 Ω)	B
R109	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	T
R110	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	T
R111	7030005100	S.RESISTOR ERJ2GEJ 154 X (150 kΩ)	B
R112	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	B
R113	7030005110	S.RESISTOR ERJ2GEJ 224 X (220 kΩ)	B
R114	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	B
R115	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	B
R116	7030005110	S.RESISTOR ERJ2GEJ 224 X (220 kΩ)	B
R117	7030007280	S.RESISTOR ERJ2GEJ 331 X (330 Ω)	B
R118	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	B
R119	7030005170	S.RESISTOR ERJ2GEJ 474 X (470 kΩ)	B
R120	7030007340	S.RESISTOR ERJ2GEJ 153 X (15 kΩ)	B
R121	7030009320	S.RESISTOR ERJ2GEJ 4R7 X (4.7 Ω)	B
R122	7030008400	S.RESISTOR ERJ2GEJ 182 X (1.8 kΩ)	B
R123	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	B
R124	7030005170	S.RESISTOR ERJ2GEJ 474 X (470 kΩ)	B
R125	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	B
R126	7030005110	S.RESISTOR ERJ2GEJ 224 X (220 kΩ)	B
R127	7030004970	S.RESISTOR ERJ2GEJ 470 X (47 Ω)	T
R128	7030005170	S.RESISTOR ERJ2GEJ 474 X (470 kΩ)	T
R129	7030007290	S.RESISTOR ERJ2GEJ 222 X (2.2 kΩ)	T
R130	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	T
R131	7030005230	S.RESISTOR ERJ2GEJ 334 X (330 kΩ)	T
R132	7030005100	S.RESISTOR ERJ2GEJ 154 X (150 kΩ)	T
R133	7030005290	S.RESISTOR ERJ2GEJ 682 X (6.8 kΩ)	T
R134	7030003200	S.RESISTOR ERJ3GEYJ 100 V (10 Ω)	B
R135	7030003200	S.RESISTOR ERJ3GEYJ 100 V (10 Ω)	B
R136	7030005290	S.RESISTOR ERJ2GEJ 682 X (6.8 kΩ)	B
R137	7030009140	S.RESISTOR ERJ2GEJ 272 X (2.7 kΩ)	B
R138	7030007300	S.RESISTOR ERJ2GEJ 332 X (3.3 kΩ)	B
R139	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	B
R140	7030005160	S.RESISTOR ERJ2GEJ 105 X (1 MΩ)	B
R141	7030005070	S.RESISTOR ERJ2GEJ 683 X (68 kΩ)	B
R142	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R143	7030008010	S.RESISTOR ERJ2GEJ 123 X (12 kΩ)	T
R144	7030005720	S.RESISTOR ERJ2GEJ 563 X (56 kΩ)	T
R145	7030004980	S.RESISTOR ERJ2GEJ 101 X (100 Ω)	T
R146	7030005040	S.RESISTOR ERJ2GEJ 472 X (4.7 kΩ)	T
R150	7030005110	S.RESISTOR ERJ2GEJ 224 X (220 kΩ)	B
R151	7030005100	S.RESISTOR ERJ2GEJ 154 X (150 kΩ)	B
R152	7030005310	S.RESISTOR ERJ2GEJ 124 X (120 kΩ)	B
R153	7030009320	S.RESISTOR ERJ2GEJ 4R7 X (4.7 Ω)	B
R155	7030007350	S.RESISTOR ERJ2GEJ 393 X (39 kΩ)	B
R157	7030005220	S.RESISTOR ERJ2GEJ 223 X (22 kΩ)	B
R159	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	B
R161	7030005070	S.RESISTOR ERJ2GEJ 683 X (68 kΩ)	B

[L]: L-band, [ML]: ML-band, [MH]: MH-band, [H]: H-band, [M]: ML and MH bands, [GT]: IC-F40GT/F41GT, [GS]: IC-F40GS/F41GS, [F40G]: IC-F40GT/F40GS, [F41G]: IC-F41GT/F41GS, [IS]: Intrinsically safe version, [BIIS]: BIIS version

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side) * =Safety critical components S.=Surface mount

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.
R162	7030005070	S.RESISTOR ERJ2GEJ 683 X (68 kΩ)	B
R163	7030005060	S.RESISTOR ERJ2GEJ 333 X (33 kΩ)	B
R164	7030005110	S.RESISTOR ERJ2GEJ 224 X (220 kΩ)	B
R165	7030005600	S.RESISTOR ERJ2GEJ 273 X (27 kΩ)	B
R166	7030005530	S.RESISTOR ERJ2GEJ 100 X (10 Ω)	T
R167	7030005170	S.RESISTOR ERJ2GEJ 474 X (470 kΩ)	T
R168	7030007350	S.RESISTOR ERJ2GEJ 393 X (39 kΩ)	B
R171	7030005070	S.RESISTOR ERJ2GEJ 683 X (68 kΩ)	B
R172	7030005070	S.RESISTOR ERJ2GEJ 683 X (68 kΩ)	B
R173	7030005100	S.RESISTOR ERJ2GEJ 154 X (150 kΩ)	B
R174	7030005600	S.RESISTOR ERJ2GEJ 273 X (27 kΩ)	B
R175	7030009290	S.RESISTOR ERJ2GEJ 562 X (5.6 kΩ)	B
R176	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	T
R177	7030008290	S.RESISTOR ERJ2GEJ 183 X (18 kΩ)	B
R178	7030005600	S.RESISTOR ERJ2GEJ 273 X (27 kΩ)	T
R179	7030005600	S.RESISTOR ERJ2GEJ 273 X (27 kΩ)	T
R180	7030007340	S.RESISTOR ERJ2GEJ 153 X (15 kΩ)	B
R181	7030005600	S.RESISTOR ERJ2GEJ 273 X (27 kΩ)	B
R182	7030005600	S.RESISTOR ERJ2GEJ 273 X (27 kΩ)	B
R183	7030005030	S.RESISTOR ERJ2GEJ 152 X (1.5 kΩ)	B
R184	7030008010	S.RESISTOR ERJ2GEJ 123 X (12 kΩ)	B
R185	7030005310	S.RESISTOR ERJ2GEJ 124 X (120 kΩ)	B
R186	7030005070	S.RESISTOR ERJ2GEJ 683 X (68 kΩ)	B
R187	7030005040	S.RESISTOR ERJ2GEJ 472 X (4.7 kΩ)	T
R188	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	B
R189	7030005000	S.RESISTOR ERJ2GEJ 471 X (470 Ω)	T
R190	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R192	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	B
R193	7210003060	VARIABLE TP76N00N-15F-10KA-2251	T
R195	7030005040	S.RESISTOR ERJ2GEJ 472 X (4.7 kΩ)	B
R196	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	B
R197	7030005040	S.RESISTOR ERJ2GEJ 472 X (4.7 kΩ)	B
R198	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	B
R199	7030005040	S.RESISTOR ERJ2GEJ 472 X (4.7 kΩ)	B
R200	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	B
R201	7030007290	S.RESISTOR ERJ2GEJ 222 X (2.2 kΩ)	B
R202	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	B
R203	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	B
R206	7030004980	S.RESISTOR ERJ2GEJ 101 X (100 Ω)	T
R207	7030005220	S.RESISTOR ERJ2GEJ 223 X (22 kΩ)	T
R208	7030007340	S.RESISTOR ERJ2GEJ 153 X (15 kΩ)	T
R209	7030005230	S.RESISTOR ERJ2GEJ 334 X (330 kΩ)	T
R210	7030006610	S.RESISTOR ERJ2GEJ 394 X (390 kΩ)	T
R211	7030007570	S.RESISTOR ERJ2GEJ 122X (1.2 kΩ)	T
R212	7030003830	S.RESISTOR ERJ2GEJ 185 V (1.8 MΩ)	T
R215	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R216	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	[GS] only T [GT] only B
R217	7030005000	S.RESISTOR ERJ2GEJ 471 X (470 Ω)	T
R218	7030007350	S.RESISTOR ERJ2GEJ 393 X (39 kΩ)	T
R219	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	T
R220	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	B
R221	7030005060	S.RESISTOR ERJ2GEJ 333 X (33 kΩ)	B
R222	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R223	7410000580	S.ARRAY EXB-V4V 224JV (220 kΩ)	T
R224	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R225	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R226	7510001470	S.THERMISTOR NTCG20 4AG 473JT	B
R227	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R228	7030010080	S.RESISTOR ERJ2RHD 104 X (100 kΩ)	T
R229	7030010080	S.RESISTOR ERJ2RHD 104 X (100 kΩ)	T
R230	7030008010	S.RESISTOR ERJ2GEJ 123 X (12 kΩ)	T
R231	7030008010	S.RESISTOR ERJ2GEJ 123 X (12 kΩ)	T
R232	7030008010	S.RESISTOR ERJ2GEJ 123 X (12 kΩ)	T
R233	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R234	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	B
R235	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	T
R236	7410000950	S.ARRAY EXB-V8V 102JV	B
R237	7410000950	S.ARRAY EXB-V8V 102JV	B
R238	7410000950	S.ARRAY EXB-V8V 102JV	B
R239	7410000770	S.ARRAY EXB-V4V 102JV (1 kΩ)	B
R240	7410000770	S.ARRAY EXB-V4V 102JV (1 kΩ)	B
R241	7410000770	S.ARRAY EXB-V4V 102JV (1 kΩ)	B
R242	7410000700	S.ARRAY EXB-V8V 105JV (1 MΩ)	T
R243	7410000900	S.ARRAY EXB-V4V 105JV (1 MΩ)	T
R244	7410000950	S.ARRAY EXB-V8V 102JV	T
R245	7410000770	S.ARRAY EXB-V4V 102JV (1 kΩ)	T
R246	7410000950	S.ARRAY EXB-V8V 102JV	B
R247	7410000950	S.ARRAY EXB-V8V 102JV	T
R248	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	T
R249	7410000950	S.ARRAY EXB-V8V 102JV	B
R250	7410000770	S.ARRAY EXB-V4V 102JV (1 kΩ)	T
R251	7410000950	S.ARRAY EXB-V8V 102JV	T
R252	7410000950	S.ARRAY EXB-V8V 102JV	B
R253	7410000750	S.ARRAY EXB-V4V 104JV (100 kΩ)	T
R254	7030008300	S.RESISTOR ERJ2GEJ 184 X (180 kΩ)	T
R257	7030005220	S.RESISTOR ERJ2GEJ 223 X (22 kΩ)	T

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.
R258	7030005220	S.RESISTOR ERJ2GEJ 223 X (22 kΩ)	T
R259	7030007350	S.RESISTOR ERJ2GEJ 393 X (39 kΩ)	T
R260	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	T
R261	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	T
R262	7030009290	S.RESISTOR ERJ2GEJ 562 X (5.6 kΩ)	T
R264	7030005000	S.RESISTOR ERJ2GEJ 471 X (470 Ω)	B
R266	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	B
R267	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	B
R268	7030004980	S.RESISTOR ERJ2GEJ 101 X (100 Ω)	B
R269	7030005310	S.RESISTOR ERJ2GEJ 124 X (120 kΩ)	B
R270	7030008290	S.RESISTOR ERJ2GEJ 183 X (18 kΩ)	B
R271	7030005110	S.RESISTOR ERJ2GEJ 224 X (220 kΩ)	B
R272	7030005070	S.RESISTOR ERJ2GEJ 683 X (68 kΩ)	B
R273	7030005220	S.RESISTOR ERJ2GEJ 223 X (22 kΩ)	T
R274	7030005220	S.RESISTOR ERJ2GEJ 223 X (22 kΩ)	T
R275	7030005220	S.RESISTOR ERJ2GEJ 223 X (22 kΩ)	T
R276	7030004970	S.RESISTOR ERJ2GEJ 470 X (47 Ω)	T
R277	7030005800	S.RESISTOR RR0510P-102-D (1 kΩ)	T
R278	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	B
R279	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	T
R280	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	B
R281	7030005600	S.RESISTOR ERJ2GEJ 273 X (27 kΩ)	T
R283	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	B
R284	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	T
R285	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	T
R288	7030005530	S.RESISTOR ERJ2GEJ 100 X (10 Ω)	T
R289	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R291	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R292	7030009290	S.RESISTOR ERJ2GEJ 562 X (5.6 kΩ)	T
R293	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	B
R294	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	T
R295	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	T
R296	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	B
R297	7410000950	S.ARRAY EXB-V8V 102JV	T
R298	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	B
R299	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	B
R307	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	B
R312	7030005220	S.RESISTOR ERJ2GEJ 223 X (22 kΩ)	T
R313	7030005060	S.RESISTOR ERJ2GEJ 333 X (33 kΩ)	T
R314	7030005060	S.RESISTOR ERJ2GEJ 333 X (33 kΩ)	T
R315	7030005060	S.RESISTOR ERJ2GEJ 333 X (33 kΩ)	T
R316	7030010990	S.RESISTOR RR0510P-272-D	T
R317	7030005170	S.RESISTOR ERJ2GEJ 474 X (470 kΩ)	B
R318	7030005060	S.RESISTOR ERJ2GEJ 333 X (33 kΩ)	T
R321	7030005030	S.RESISTOR ERJ2GEJ 152 X (1.5 kΩ)	[H] B
	7030007290	S.RESISTOR ERJ2GEJ 222 X (2.2 kΩ)	Other B
R322	7410000710	S.ARRAY EXB-V8V 224JV (220 kΩ)	T
R323	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	B
R324	7030005000	S.RESISTOR ERJ2GEJ 471 X (470 Ω)	T
R325	7030005820	S.RESISTOR RR0510P-103-D (10 kΩ)	B
R326	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	T
R327	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	T
	7030009280	S.RESISTOR ERJ2GE 391 X (390 Ω)	[L]-F41G, [L]-BIS Other T
R329	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	T
R330	7030009320	S.RESISTOR ERJ2GEJ 4R7 X (4.7 Ω)	T
R331	7030005170	S.RESISTOR ERJ2GEJ 474 X (470 kΩ)	B
R332	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R333	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	B
R334	7030005080	S.RESISTOR ERJ2GEJ 823 X (82 kΩ)	B
R336	7030005600	S.RESISTOR ERJ2GEJ 273 X (27 kΩ)	B
R337	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	B
R338	7030007570	S.RESISTOR ERJ2GEJ 122X (1.2 kΩ)	B
R339	7030007570	S.RESISTOR ERJ2GEJ 122X (1.2 kΩ)	B
R340	7030007570	S.RESISTOR ERJ2GEJ 122X (1.2 kΩ)	B
R342	7030007300	S.RESISTOR ERJ2GEJ 332 X (3.3 kΩ)	B
R343	7030007570	S.RESISTOR ERJ2GEJ 122X (1.2 kΩ)	B
R346	7030007570	S.RESISTOR ERJ2GEJ 122X (1.2 kΩ)	T
R347	7030007570	S.RESISTOR ERJ2GEJ 122X (1.2 kΩ)	T
R348	7030007570	S.RESISTOR ERJ2GEJ 122X (1.2 kΩ)	T
R349	7030007570	S.RESISTOR ERJ2GEJ 122X (1.2 kΩ)	T
R350	7030007570	S.RESISTOR ERJ2GEJ 122X (1.2 kΩ)	T
R357	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	T
R358	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	T
R359	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	T
R360	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	T
R361	7030005720	S.RESISTOR ERJ2GEJ 563 X (56 kΩ)	T
R362	7030005210	S.RESISTOR ERJ2GEJ 822 X (8.2 kΩ)	Other T
	7030005290	S.RESISTOR ERJ2GEJ 682 X (6.8 kΩ)	[H] T
R363	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R364	7030005090	S.RESISTOR ERJ2GEJ 104 X (100 kΩ)	T
R365	7030007350	S.RESISTOR ERJ2GEJ 393 X (39 kΩ)	T
R366	7030005080	S.RESISTOR ERJ2GEJ 823 X (82 kΩ)	T
R367	7030005030	S.RESISTOR ERJ2GEJ 152 X (1.5 kΩ)	T
R368	7030006610	S.RESISTOR ERJ2GEJ 394 X (390 kΩ)	T
R369	7030008300	S.RESISTOR ERJ2GEJ 184 X (180 kΩ)	T
R370	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	T
R371	7030005220	S.RESISTOR ERJ2GEJ 223 X (22 kΩ)	T

[L]: L-band, [ML]: ML-band, [MH]: MH-band, [H]: H-band, [M]: ML and MH bands, [GT]: IC-F40GT/F41GT, [GS]: IC-F40GS/F41GS, [F40G]: IC-F40GT/F40GS, [F41G]: IC-F41GT/F41GS, [IS]: Intrinsically safe version, [BIS]: BIS version

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side) * =Safety critical components S.=Surface mount

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.
R372	7030005060	S.RESISTOR ERJ2GEJ 333 X (33 kΩ)	T
R373	7030005040	S.RESISTOR ERJ2GEJ 472 X (4.7 kΩ)	T
R374	7030005240	S.RESISTOR ERJ2GEJ 473 X (47 kΩ)	T
R375	7030005040	S.RESISTOR ERJ2GEJ 472 X (4.7 kΩ)	T
R376	7030008410	S.RESISTOR ERJ2GEJ 392 X (3.9 kΩ)	B
R377	7030005500	S.RESISTOR RR0816R-124-D (120 kΩ)	B
R378	7030005840	S.RESISTOR RR0510R-473-D (47 kΩ)	B
R379	7030005050	S.RESISTOR ERJ2GEJ 103 X (10 kΩ)	B
R380	7030005120	S.RESISTOR ERJ2GEJ 102 X (1 kΩ)	T
R381	7030007280	S.RESISTOR ERJ2GEJ 331 X (330 Ω)	T
R382	7030010460	S.RESISTOR ERJ8GEYJ 330V (33 Ω)	T
C1	4030006990	S.CERAMIC C1608 CH 1H 080D-T [H]	B
	4030007000	S.CERAMIC C1608 CH 1H 090D-T Other	B
	4030007010	S.CERAMIC C1608 CH 1H 100D-T [L]-F41G, [L]-BIIS	B
C2	4030006980	S.CERAMIC C1608 CH 1H 070D-T [L]	B
	4030009530	S.CERAMIC C1608 CH 1H 030B-T [M], [H]	B
C4	4030006860	S.CERAMIC C1608 JB 1H 102K-T	T
C5	4030014220	S.CERAMIC ECUE1E471KBQ	B
C6	4030013850	S.CERAMIC ECUE1E102KBQ	B
C7	4030013850	S.CERAMIC ECUE1E102KBQ	B
C8	4030013850	S.CERAMIC ECUE1E102KBQ	B
C9	4030013980	S.CERAMIC ECUE1H010BCQ	B
C10	4030013850	S.CERAMIC ECUE1E102KBQ	T
C11	4030013850	S.CERAMIC ECUE1E102KBQ	T
C12	4030014050	S.CERAMIC ECUE1H030BCQ [L]-except BIIS	T
	4030017360	S.CERAMIC ECJ0EC1H030B [L]-BIIS	T
C14	4030004880	S.CERAMIC C2012 CH 1H 120J-T [H]	T
	4030004900	S.CERAMIC C2012 CH 1H 180J-T [L], [M]	T
C16*	4030008680	S.CERAMIC C2012 JF 1C 105Z-T	B
C17	4030013850	S.CERAMIC ECUE1E102KBQ	B
C18	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	T
C19	4030009780	S.CERAMIC C1005 CH 1H 270J-T-A [L], [M]	T
	4030014170	S.CERAMIC ECUE1H330JCQ [H]	T
C20	4030016930	S.CERAMIC ECJ0EB1A104K [F41G], [BIIS]	T
	4030013850	S.CERAMIC ECUE1E102KBQ Other	T
C21	4030014220	S.CERAMIC ECUE1E471KBQ	B
C23*	4550006660	S.TANTALUM ECST1CC226R	T
C24	4030014220	S.CERAMIC ECUE1E471KBQ	B
C26	4030014180	S.CERAMIC ECUE1H470JCQ	B
C27	4030013850	S.CERAMIC ECUE1E102KBQ	B
C28	4030014180	S.CERAMIC ECUE1H470JCQ	B
C29	4030013850	S.CERAMIC ECUE1E102KBQ	B
C30	4030014220	S.CERAMIC ECUE1E471KBQ	T
C32	4030014180	S.CERAMIC ECUE1H470JCQ	T
C33	4030013850	S.CERAMIC ECUE1E102KBQ	T
C34	4030009780	S.CERAMIC C1005 CH 1H 270J-T-A [L]-F41G, [L]-BIIS	T
	4030014090	S.CERAMIC ECUE1H060CCQ [L]-F40G except BIIS	T
	4030014130	S.CERAMIC ECUE1H120JCQ [H], [M]-F40G except BIIS	T
	4030017390	S.CERAMIC ECUCJ0EC1H180J [M]-F41G, [M]-BIIS	T
C35	4030014180	S.CERAMIC ECUE1H470JCQ	B
C36	4030014180	S.CERAMIC ECUE1H470JCQ	T
C37	4030016930	S.CERAMIC ECJ0EB1A104K [L]-F41G, [L]-BIIS	T
	4030014220	S.CERAMIC ECUE1E471KBQ Other	T
C38	4030017350	S.CERAMIC ECJ0EC1H020B [L]-F41G, [L]-BIIS	T
	4030014080	S.CERAMIC ECUE1H050BCQ Other	T
C39	4030014080	S.CERAMIC ECUE1H050BCQ	T
	4030017360	S.CERAMIC ECJ0EC1H030B [L]-F41G, [L]-BIIS	T
	4030017380	S.CERAMIC ECJ0EC1H050B [M]-BIIS	T
C40	4030016930	S.CERAMIC ECJ0EB1A104K	T
C41	4030014180	S.CERAMIC ECUE1H470JCQ	T
C42	4030013850	S.CERAMIC ECUE1E102KBQ	B
C43	4030014220	S.CERAMIC ECUE1E471KBQ	B
C44	4030014120	S.CERAMIC ECUE1H100CCQ Other	T
	4030017600	S.CERAMIC ECJ0EC1H080C [L]-F41G, [L]-BIIS	T
	4030017620	S.CERAMIC ECJ0EC1H100C [M]-BIIS	T
C46	4030014090	S.CERAMIC ECUE1H060CCQ [L]-F40G except BIIS	B
	4030017360	S.CERAMIC ECJ0EC1H030B [ML]-F41G, [M]-BIIS	B
	4030017380	S.CERAMIC ECJ0EC1H050B Other	B
C47	4030014220	S.CERAMIC ECUE1E471KBQ	B
C48	4030014080	S.CERAMIC ECUE1H050BCQ [F41G]-except BIIS	B
	4030014130	S.CERAMIC ECUE1H120JCQ [F40G]-except BIIS	B
	4030017360	S.CERAMIC ECJ0EC1H030B [M]-BIIS	B
	4030017380	S.CERAMIC ECJ0EC1H050B [L]-BIIS	B
C49	4030014130	S.CERAMIC ECUE1H120JCQ	B

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.
C50	4030013980	S.CERAMIC ECUE1H010BCQ	T
C51	4030014220	S.CERAMIC ECUE1E471KBQ	B
C52	4030014220	S.CERAMIC ECUE1E471KBQ	T
C53	4030014180	S.CERAMIC ECUE1H470JCQ	B
C54	4030013850	S.CERAMIC ECUE1E102KBQ [H]	T
	4030014220	S.CERAMIC ECUE1E471KBQ Other	T
	4030017420	S.CERAMIC ECJ0EC1H470J [F41G], [BIIS]	T
C55	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A [F40G]-except BIIS	T
	4030017460	S.CERAMIC ECJ0EB1E102K [F41G], [BIIS]	T
C56	4030013980	S.CERAMIC ECUE1H010BCQ [F40G]-except BIIS	T
	4030014220	S.CERAMIC ECUE1E471KBQ [F41G]-except BIIS	T
	4030017530	S.CERAMIC ECJ0EC1H0R5B [BIIS]	T
C57	4030014110	S.CERAMIC ECUE1H080CCQ [H]	T
	4030017390	S.CERAMIC ECUCJ0EC1H180J [L]	T
	4030017620	S.CERAMIC ECJ0EC1H100C [M]	T
C58	4030014050	S.CERAMIC ECUE1H030BCQ [H]	T
	4030014090	S.CERAMIC ECUE1H060CCQ Other	T
	4030017580	S.CERAMIC ECJ0EC1H060C [BIIS]	T
C59	4030008180	S.CERAMIC C1608 UJ 1H 030C-T [L]	T
	4030008190	S.CERAMIC C1608 UJ 1H 040C-T [M], [H]	T
C61	4030014070	S.CERAMIC ECUE1H040BCQ [H]	T
	4030014090	S.CERAMIC ECUE1H060CCQ [MH]-except BIIS	T
	4030014120	S.CERAMIC ECUE1H100CCQ [ML]-except BIIS	T
	4030017610	S.CERAMIC ECJ0EC1H090C [L]	T
	4030017620	S.CERAMIC ECJ0EC1H100C [M]-BIIS	T
C62	4550006700	S.TANTALUM ECST1AY106R	T
C63	4550006700	S.TANTALUM ECST1AY106R	B
C64	4030013850	S.CERAMIC ECUE1E102KBQ	T
C65	4030014220	S.CERAMIC ECUE1E471KBQ	T
C66	4030014280	S.CERAMIC ECUE1H0R3BCQ [L]-F41G except BIIS	T
	4030014420	S.CERAMIC ECUE1H0R5BCQ Other	T
	4030017520	S.CERAMIC ECJ0EC1H0R3B [L]-BIIS	T
	4030017530	S.CERAMIC ECJ0EC1H0R5B [M]-BIIS	T
C67	4030014070	S.CERAMIC ECUE1H040BCQ [H], [MH]-except BIIS	T
	4030017580	S.CERAMIC ECJ0EC1H060C [L], [ML], [BIIS]	T
C68	4030014100	S.CERAMIC ECUE1H070CCQ [H]	T
	4030014050	S.CERAMIC ECUE1H030BCQ Other	T
	4030017590	S.CERAMIC ECJ0EC1H070C [BIIS]	T
C69	4030008180	S.CERAMIC C1608 UJ 1H 030C-T [H]	T
	4030008200	S.CERAMIC C1608 UJ 1H 050C-T Other	T
C71	4030014280	S.CERAMIC ECUE1H0R3BCQ	T
C72	4030014080	S.CERAMIC ECUE1H050BCQ [H]	T
	4030014100	S.CERAMIC ECUE1H070CCQ Other	T
	4030017590	S.CERAMIC ECJ0EC1H070C [BIIS]	T
C73	4030014180	S.CERAMIC ECUE1H470JCQ	B
C74	4550006810	S.TANTALUM ECST1VY473R	B
C76	4030007130	S.CERAMIC C1608 CH 1H 101J-T	B
C77	4550006410	S.TANTALUM ECST1VY334R	T
C78	4030006860	S.CERAMIC C1608 JB 1H 102K-T	T
C79	4030013850	S.CERAMIC ECUE1E102KBQ	T
C80	4030016930	S.CERAMIC ECJ0EB1A104K	T
C81	4030014180	S.CERAMIC ECUE1H470JCQ	T
C82	4030014120	S.CERAMIC ECUE1H100CCQ	B
C83	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	T
C84	4030014070	S.CERAMIC ECUE1H040BCQ	T
C85	4030014070	S.CERAMIC ECUE1H040BCQ	T
C86	4030014080	S.CERAMIC ECUE1H050BCQ	T
C87	4030014050	S.CERAMIC ECUE1H030BCQ	T
C88	4030013850	S.CERAMIC ECUE1E102KBQ	B
C89	4030014090	S.CERAMIC ECUE1H060CCQ	B
C90	4030014090	S.CERAMIC ECUE1H060CCQ	B
C91	4030016930	S.CERAMIC ECJ0EB1A104K	T
C95	4030014180	S.CERAMIC ECUE1H470JCQ	T
C98	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	T
C99	4030014180	S.CERAMIC ECUE1H470JCQ	T
C100	4030013850	S.CERAMIC ECUE1E102KBQ	B
C101	4030013850	S.CERAMIC ECUE1E102KBQ	B
C102	4030013910	S.CERAMIC C1005 JB 1H472K-T-N	B
C103	4030014120	S.CERAMIC ECUE1H100CCQ	B
C104	4030016930	S.CERAMIC ECJ0EB1A104K	T
C105	4030013850	S.CERAMIC ECUE1E102KBQ	T
C106	4030016930	S.CERAMIC ECJ0EB1A104K	B
C107	4030014180	S.CERAMIC ECUE1H470JCQ	B
C108	4030014180	S.CERAMIC ECUE1H470JCQ	T
C109	4030016930	S.CERAMIC ECJ0EB1A104K	T
C110	4030016930	S.CERAMIC ECJ0EB1A104K	T
C111	4030013850	S.CERAMIC ECUE1E102KBQ	B
C112	4030014220	S.CERAMIC ECUE1E471KBQ	B
C113	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	B
C114	4030016930	S.CERAMIC ECJ0EB1A104K	B
C115	4030013850	S.CERAMIC ECUE1E102KBQ	T
C116	4030014220	S.CERAMIC ECUE1E471KBQ	B
C117	4030013850	S.CERAMIC ECUE1E102KBQ	B

[L]: L-band, [ML]: ML-band, [MH]: MH-band, [H]: H-band, [M]: ML and MH bands, [GT]: IC-F40GT/F41GT, [GS]: IC-F40GS/F41GS, [F40G]: IC-F40GT/F40GS, [F41G]: IC-F41GT/F41GS, [IS]: Intrinsically safe version, [BIIS]: BIIS version

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)

*=Safety critical components

S.=Surface mount

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.
C118	4030013850	S.CERAMIC ECUE1E102KBQ	B
C121	4030016930	S.CERAMIC ECJ0EB1A104K	B
C123	4030014200	S.CERAMIC ECUE1H101JCQ	B
C124*	4550006700	S.TANTALUM ECST1AY106R	T
C125	4030014200	S.CERAMIC ECUE1H101JCQ	B
C126	4030014220	S.CERAMIC ECUE1E471KBQ	T
C127*	4550006170	S.TANTALUM ECST1AY225R	T
C128	4030014140	S.CERAMIC ECUE1H150JCQ	B
C129	4030014070	S.CERAMIC ECUE1H040BCQ	B
C131	4030014130	S.CERAMIC ECUE1H120JCQ	B
C132	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A Other	B
	4030017400	S.CERAMIC ECJ0EC1H220J [F41], [BIIS]	B
C133	4030013850	S.CERAMIC ECUE1E102KBQ	B
C134	4030013850	S.CERAMIC ECUE1E102KBQ	B
C135	4030014150	S.CERAMIC ECUE1H220JCQ	B
C136	4030013980	S.CERAMIC ECUE1H010BCQ	B
		[L]-F41G except BIIS	B
	4030014420	S.CERAMIC ECUE1H0R5BCQ Other	B
	4030017340	S.CERAMIC ECJ0EC1H010B [L]-BIIS	B
	4030017530	S.CERAMIC ECJ0EC1H0R5B [M]-BIIS	B
C137	4030014070	S.CERAMIC ECUE1H040BCQ [H]	B
	4030014080	S.CERAMIC ECUE1H050BCQ [MH]-except BIIS	B
	4030017580	S.CERAMIC ECJ0EC1H060C [ML], [M]-BIIS	B
	4030017600	S.CERAMIC ECJ0EC1H080C [L]	B
C138	4030014100	S.CERAMIC ECUE1H070CCQ Other	B
	4030014290	S.CERAMIC ECUE1H090CCQ	B
		[L]-F40G except BIIS	B
	4030017600	S.CERAMIC ECJ0EC1H080C	B
		[ML]-F41G, [M]-BIIS	B
	4030017620	S.CERAMIC ECJ0EC1H100C	B
		[L]-F41G, [L]-BIIS	B
C139	4030014180	S.CERAMIC ECUE1H470JCQ	B
C140	4030014420	S.CERAMIC ECUE1H0R5BCQ Other	B
	4030017530	S.CERAMIC ECJ0EC1H0R5B [M]-BIIS	B
	4030017540	S.CERAMIC ECJ0EC1HR75B [L]	B
C141	4030014090	S.CERAMIC ECUE1H060CCQ [H]	B
	4030014110	S.CERAMIC ECUE1H080CCQ [MH]-except BIIS	B
	4030017610	S.CERAMIC ECJ0EC1H090C [ML], [M]-BIIS	B
	4030017620	S.CERAMIC ECJ0EC1H100C [L]	B
C142	4030014180	S.CERAMIC ECUE1H470JCQ	B
C143	4030017360	S.CERAMIC ECJ0EC1H030B [ML], [M]-BIIS	B
	4030017530	S.CERAMIC ECJ0EC1H0R5B [L], [H]	B
C144	4030014070	S.CERAMIC ECUE1H040BCQ [ML]-except BIIS	B
	4030014090	S.CERAMIC ECUE1H060CCQ [H]	B
	4030014100	S.CERAMIC ECUE1H070CCQ [MH]-except BIIS	B
	4030017570	S.CERAMIC ECJ0EC1H040B [M]-BIIS	B
	4030017620	S.CERAMIC ECJ0EC1H100C [L]	B
C145	4030014420	S.CERAMIC ECUE1H0R5BCQ	B
C146	4030014110	S.CERAMIC ECUE1H080CCQ Other	B
	4030017620	S.CERAMIC ECJ0EC1H100C [ML], [M]-BIIS	B
	4030017630	S.CERAMIC ECJ0EC1H120J [L]	B
C147	4030014180	S.CERAMIC ECUE1H470JCQ	B
C148	4030013850	S.CERAMIC ECUE1E102KBQ	T
C149	4030014220	S.CERAMIC ECUE1E471KBQ	T
C150	4030014180	S.CERAMIC ECUE1H470JCQ	T
C151	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	B
C152	4030014070	S.CERAMIC ECUE1H040BCQ	B
C154	4030014180	S.CERAMIC ECUE1H470JCQ	B
C155	4030013850	S.CERAMIC ECUE1E102KBQ	B
C156	4030014240	S.CERAMIC ECUE1H180JCQ Other	B
	4030017390	S.CERAMIC ECJ0EC1H180J [M]-BIIS	B
	4030017610	S.CERAMIC ECJ0EC1H090C [L]	B
C157	4550006140	S.TANTALUM ECST1EY474R	B
C158	4030014180	S.CERAMIC ECUE1H470JCQ	B
C159	4030013850	S.CERAMIC ECUE1E102KBQ	B
C160	4030014020	S.CERAMIC ECUE1H020BCQ [H]	B
	4030017360	S.CERAMIC ECJ0EC1H030B [ML], [M]-BIIS	B
	4030017570	S.CERAMIC ECJ0EC1H040B Other	B
C161	4030014060	S.CERAMIC ECUE1H3R5BCQ [MH]-except BIIS	B
	4030014080	S.CERAMIC ECUE1H050BCQ [H]	B
	4030017590	S.CERAMIC ECJ0EC1H070C [ML], [M]-BIIS	B
	4030017600	S.CERAMIC ECJ0EC1H080C [L]	B
C162	4030014180	S.CERAMIC ECUE1H470JCQ	B
C163	4030014020	S.CERAMIC ECUE1H020BCQ	B
C165	4030014070	S.CERAMIC ECUE1H040BCQ [H]	B
	4030017360	S.CERAMIC ECJ0EC1H030B [M]	B
	4030017380	S.CERAMIC ECJ0EC1H050B [L]	B
C166	4030014180	S.CERAMIC ECUE1H470JCQ	B
C167	4030017380	S.CERAMIC ECJ0EC1H050B [M]	T
	4030017420	S.CERAMIC ECJ0EC1H470J [L], [H]	T
C168	4030017360	S.CERAMIC ECJ0EC1H030B [M],[H]	T
	4030017380	S.CERAMIC ECJ0EC1H050B [L]	T
C169	4030014100	S.CERAMIC ECUE1H070CCQ [H]	T
	4030017600	S.CERAMIC ECJ0EC1H080C [M]	T
	4030017620	S.CERAMIC ECJ0EC1H100C [L]	T
C170	4030007000	S.CERAMIC C1608 CH 1H 090D-T [M]	T
	4030007010	S.CERAMIC C1608 CH 1H 100D-T [H]	T
	4030011770	S.CERAMIC C1608 CH 1H 060B-T [L]	T

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.
C171	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	T
C172*	4550006700	S.TANTALUM ECST1AY106R	T
C173	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	T
		[F40G]-except BIIS	T
C174	4030014180	S.CERAMIC ECUE1H470JCQ	T
C175	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	T
		[L]-F41G, [L]-BIIS	T
	4030017040	S.CERAMIC ECJ0EB1A333K [F40G]-except BIIS	T
C176	4030013850	S.CERAMIC ECUE1E102KBQ	T
C177	4030014220	S.CERAMIC ECUE1E471KBQ	T
C178*	4550006670	S.TANTALUM ECST1AD107R	B
C179	4030013960	S.CERAMIC C1005 JB 1C 473K-T-N	B
C180	4030014180	S.CERAMIC ECUE1H470JCQ	B
C181*	4550006700	S.TANTALUM ECST1AY106R	B
C182	4030013930	S.CERAMIC C1005 JE 1E 183K-T-N	B
C183	4030013850	S.CERAMIC ECUE1E102KBQ	B
C184*	4550006210	S.TANTALUM ECST1CX106R	T
C185	4030016930	S.CERAMIC ECJ0EB1A104K	B
C186	4030016930	S.CERAMIC ECJ0EB1A104K	B
C187	4030014180	S.CERAMIC ECUE1H470JCQ	B
C188	4030014180	S.CERAMIC ECUE1H470JCQ	T
C189	4030013850	S.CERAMIC ECUE1E102KBQ	T
C190	4030013850	S.CERAMIC ECUE1E102KBQ	T
C191	4030016930	S.CERAMIC ECJ0EB1A104K	T
C192	4030013910	S.CERAMIC C1005 JB 1H472K-T-N	T
C193*	4550006320	S.TANTALUM ECST0JY475R	B
C194	4030013910	S.CERAMIC C1005 JB 1H472K-T-N	B
C195	4030014220	S.CERAMIC ECUE1E471KBQ	B
C197	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	B
C198	4030013910	S.CERAMIC C1005 JB 1H472K-T-N	B
C199	4030014500	S.CERAMIC ECUE1H121JCQ	B
C200	4030014350	S.CERAMIC ECUE1H560JCQ	B
C202	4030017230	S.CERAMIC ECUE1E271KBQ	B
C203	4030016920	S.CERAMIC ECUE1H222KBQ	T
C205	4550006360	S.TANTALUM ECST1VY104R	B
C206	4030016930	S.CERAMIC ECJ0EB1A104K	B
C207	4030016930	S.CERAMIC ECJ0EB1A104K	B
C208*	4550006320	S.TANTALUM ECST0JY475R	B
C213*	4550006320	S.TANTALUM ECST0JY475R	B
C214	4550006360	S.TANTALUM ECST1VY104R	B
C215	4030016930	S.CERAMIC ECJ0EB1A104K	B
C216	4030013960	S.CERAMIC C1005 JB 1C 473K-T-N	B
C217	4030016930	S.CERAMIC ECJ0EB1A104K	B
C218	4030013910	S.CERAMIC C1005 JB 1H472K-T-N	B
C219	4030011300	S.CERAMIC C1005 CH 1H 121J-T-A	B
C220	4030013850	S.CERAMIC ECUE1E102KBQ [H]	T
C224	4030016930	S.CERAMIC ECJ0EB1A104K	B
C225	4030013960	S.CERAMIC C1005 JB 1C 473K-T-N	B
C226	4030013960	S.CERAMIC C1005 JB 1C 473K-T-N	B
C227	4030017040	S.CERAMIC ECJ0EB1A333K	B
C230*	4550006700	S.TANTALUM ECST1AY106R	T
C231	4030013910	S.CERAMIC C1005 JB 1H472K-T-N	T
C232	4030016920	S.CERAMIC ECUE1H222KBQ	T
C233	4030016930	S.CERAMIC ECJ0EB1A104K	T
C234	4030014180	S.CERAMIC ECUE1H470JCQ	T
C235*	4550006620	S.TANTALUM ECST0JY226R	B
C236*	4550006620	S.TANTALUM ECST0JY226R	T
C237*	4550006620	S.TANTALUM ECST0JY226R	B
C238*	4550006620	S.TANTALUM ECST0JY226R	B
C239	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	B
C240	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	B
C241	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	B
C242*	4550006320	S.TANTALUM ECST0JY475R	B
C243*	4550006950	S.TANTALUM ECST0JX476R	T
C244	4030013850	S.CERAMIC ECUE1E102KBQ	B
C246	4030013850	S.CERAMIC ECUE1E102KBQ	B
C247*	4550006210	S.TANTALUM ECST1CX106R	T
C248	4030013930	S.CERAMIC C1005 JE 1E 183K-T-N	T
C249	4030013930	S.CERAMIC C1005 JE 1E 183K-T-N	T
C250	4030014220	S.CERAMIC ECUE1E471KBQ	T
C251*	4550006170	S.TANTALUM ECST1AY225R	B
C252	4030014220	S.CERAMIC ECUE1E471KBQ	T
C253	4030013850	S.CERAMIC ECUE1E102KBQ	T
C254*	4550006320	S.TANTALUM ECST0JY475R	B
C257	4030016930	S.CERAMIC ECJ0EB1A104K	B
C258	4030016930	S.CERAMIC ECJ0EB1A104K	T
C259	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	B
C260	4030013850	S.CERAMIC ECUE1E102KBQ	B
C261	4030016930	S.CERAMIC ECJ0EB1A104K	B
C262	4030014220	S.CERAMIC ECUE1E471KBQ	B
C264*	4550006780	S.TANTALUM TEESVB2 0J 476M8R	B
C265*	4550006780	S.TANTALUM TEESVB2 0J 476M8R	B
C266	4030014220	S.CERAMIC ECUE1E471KBQ	B
C268	4030016930	S.CERAMIC ECJ0EB1A104K	T
C271	4030017030	S.CERAMIC ECJ0EB1A273K	B
C272	4030014180	S.CERAMIC ECUE1H470JCQ	T
C273	4030014180	S.CERAMIC ECUE1H470JCQ	B
C275	4030014180	S.CERAMIC ECUE1H470JCQ	T

[L]: L-band, [ML]: ML-band, [MH]: MH-band, [H]: H-band, [M]: ML and MH bands, [GT]: IC-F40GT/F41GT, [GS]: IC-F40GS/F41GS, [F40G]: IC-F40GT/F40GS, [F41G]: IC-F41GT/F41GS, [IS]: Intrinsically safe version, [BIIS]: BIIS version

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)

*=Safety critical components

S.=Surface mount

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.
C276	4030014150	S.CERAMIC ECUE1H220JCC	B
C277	40300114100	S.CERAMIC ECUE1H070CCQ	B
C278	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	T
C279	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	T
C280	4030014170	S.CERAMIC ECUE1H330JCC	T
C282	4030014180	S.CERAMIC ECUE1H470JCC	T
C283	4030014180	S.CERAMIC ECUE1H470JCC	B
C284	4030014180	S.CERAMIC ECUE1H470JCC	B
C285	4030014180	S.CERAMIC ECUE1H470JCC	B
C287	4030014180	S.CERAMIC ECUE1H470JCC	B
C288	4030014180	S.CERAMIC ECUE1H470JCC	B
C289	4030014180	S.CERAMIC ECUE1H470JCC	T
C291	4030014180	S.CERAMIC ECUE1H470JCC	B
C292	4030014180	S.CERAMIC ECUE1H470JCC	T
C293	4030014180	S.CERAMIC ECUE1H470JCC	T
C294	4030014180	S.CERAMIC ECUE1H470JCC	B
C295	4030014180	S.CERAMIC ECUE1H470JCC	B
C296	4030014180	S.CERAMIC ECUE1H470JCC	B
C297	4030014180	S.CERAMIC ECUE1H470JCC	T
C298	4030014180	S.CERAMIC ECUE1H470JCC	T
C299	4030014180	S.CERAMIC ECUE1H470JCC	B
C300	4030014180	S.CERAMIC ECUE1H470JCC	B
C304	4030014180	S.CERAMIC ECUE1H470JCC	B
C305	4030014180	S.CERAMIC ECUE1H470JCC	B
C306	4030016930	S.CERAMIC ECJ0EB1A104K	B
C307	4030014180	S.CERAMIC ECUE1H470JCC	B
C309	4030014180	S.CERAMIC ECUE1H470JCC	T
C310	4030014180	S.CERAMIC ECUE1H470JCC	B
C311	4030014180	S.CERAMIC ECUE1H470JCC	T
C312	4030014180	S.CERAMIC ECUE1H470JCC	T
C313	4030014180	S.CERAMIC ECUE1H470JCC	T
C314	4030014180	S.CERAMIC ECUE1H470JCC	B
C315	4030014180	S.CERAMIC ECUE1H470JCC	T
C316	4030013910	S.CERAMIC C1005 JB 1H472K-T-N	T
C317	4030013910	S.CERAMIC C1005 JB 1H472K-T-N	T
C319	4030014180	S.CERAMIC ECUE1H470JCC	T
C320	4030014180	S.CERAMIC ECUE1H470JCC	T
C321	4030014180	S.CERAMIC ECUE1H470JCC	T
C322	4030014180	S.CERAMIC ECUE1H470JCC	T
C323	4030014180	S.CERAMIC ECUE1H470JCC	T
C324	4030014180	S.CERAMIC ECUE1H470JCC	T
C325	4030014180	S.CERAMIC ECUE1H470JCC	T
C326	4030014180	S.CERAMIC ECUE1H470JCC	B
C327	4030014180	S.CERAMIC ECUE1H470JCC	B
C328	4030014180	S.CERAMIC ECUE1H470JCC	B
C329	4030014180	S.CERAMIC ECUE1H470JCC	T
C330	4030016930	S.CERAMIC ECJ0EB1A104K	T
C331	4030014180	S.CERAMIC ECUE1H470JCC	T
C332	4030014180	S.CERAMIC ECUE1H470JCC	B
C333	4030014180	S.CERAMIC ECUE1H470JCC	T
C334	4030014180	S.CERAMIC ECUE1H470JCC	T
C335	4030014180	S.CERAMIC ECUE1H470JCC	T
C336	4030014180	S.CERAMIC ECUE1H470JCC	B
C338	4030014180	S.CERAMIC ECUE1H470JCC	T
C340	4030014180	S.CERAMIC ECUE1H470JCC	T
C341	4030013930	S.CERAMIC C1005 JB 1E 183K-T-N	T
C342	4030016930	S.CERAMIC ECJ0EB1A104K	T
C343	4030017250	S.CERAMIC ECUE1E821KBQ	T
C345	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	B
C346	4030017060	S.CERAMIC ECUE1E332KBQ	B
C347	4030016930	S.CERAMIC ECJ0EB1A104K	B
C348	4030016930	S.CERAMIC ECJ0EB1A104K	B
C349	4030017240	S.CERAMIC ECUE1C682KBQ	T
C350	4030009820	S.CERAMIC C1005 JB 1E 103K-T-A	T
C351	4030016930	S.CERAMIC ECJ0EB1A104K	T
C352	4030013950	S.CERAMIC C1005 JB 1A 393K-T-N	T
C353	4030013850	S.CERAMIC ECUE1E102KBQ	T
C354	4030013850	S.CERAMIC ECUE1E102KBQ	T
C355	4030013850	S.CERAMIC ECUE1E102KBQ	B
C356	4030014180	S.CERAMIC ECUE1H470JCC	T
C357*	4550006770	S.TANTALUM TEESVD2 1C 476M-12R	T
C358	4030014220	S.CERAMIC ECUE1E471KBQ	T
	4030017730	S.CERAMIC ECJ0EB1E471K [BIIS]	T
C359	4030013850	S.CERAMIC ECUE1E102KBQ	Other
	4030017460	S.CERAMIC ECJ0EB1E102K [BIIS]	T
C360*	4030012600	S.CERAMIC C2012 JB 1A 105M-T	B
C361	4030014130	S.CERAMIC ECUE1H120JCC [MH]-except BIIS	B
	4030014140	S.CERAMIC ECUE1H150JCC [H]-except BIIS	B
	4030017590	S.CERAMIC ECJ0EC1H070C [ML], [M]-BIIS	B
	4030017620	S.CERAMIC ECJ0EC1H100C [L]	B
C362	4030017220	S.CERAMIC ECUE1E122KBQ	B
C364	4030014180	S.CERAMIC ECUE1H470JCC	T
C365	4030014180	S.CERAMIC ECUE1H470JCC	T
C366	4030014180	S.CERAMIC ECUE1H470JCC	T
C367	4030014180	S.CERAMIC ECUE1H470JCC	T
C369	4030014130	S.CERAMIC ECUE1H120JCC	B
C371	4030014180	S.CERAMIC ECUE1H470JCC	B
C372	4610001590	S.TRIMMER TZC3R100A110R00	T

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	M.
C373	4610001920	S.TRIMMER TZC3Z060A110R00	T
C375	4030016930	S.CERAMIC ECJ0EB1A104K	T
C377	4030014180	S.CERAMIC ECUE1H470JCC	T
C378	4030016930	S.CERAMIC ECJ0EB1A104K	B
C379	4030014180	S.CERAMIC ECUE1H470JCC	T
C380	4030014180	S.CERAMIC ECUE1H470JCC	T
C381	4030014180	S.CERAMIC ECUE1H470JCC	T
C382	4030014180	S.CERAMIC ECUE1H470JCC	T
C383	4030016930	S.CERAMIC ECJ0EB1A104K	B
C384	4030013850	S.CERAMIC ECUE1E102KBQ	T
C385	4030016930	S.CERAMIC ECJ0EB1A104K	T
C386	4030014180	S.CERAMIC ECUE1H470JCC	T
C393*	4030012600	S.CERAMIC C2012 JB 1A 105M-T	T
C394	4030013930	S.CERAMIC C1005 JE 1E 183K-T-N	T
C395	4030014190	S.CERAMIC ECUE1H680JCC	T
C396*	4030012600	S.CERAMIC C2012 JB 1A 105M-T	T
C397	4030013910	S.CERAMIC C1005 JB 1H472K-T-N	B
C398	4030013910	S.CERAMIC C1005 JB 1H472K-T-N	B
C399	4030013910	S.CERAMIC C1005 JB 1H472K-T-N	B
C400	4030013850	S.CERAMIC ECUE1E102KBQ	T
C401	4030014180	S.CERAMIC ECUE1H470JCC	T
C402*	4550006780	S.TANTALUM TEESVB2 0J 476M8R	B
C403	4030013850	S.CERAMIC ECUE1E102KBQ	T
C404	4030014180	S.CERAMIC ECUE1H470JCC	T
C405	4030014180	S.CERAMIC ECUE1H470JCC	T
C406	4030016970	S.CERAMIC ECJ0EB1C223K	T
C407	4030016930	S.CERAMIC ECJ0EB1A104K	T
C408	4030016930	S.CERAMIC ECJ0EB1A104K	B
C409	4030016930	S.CERAMIC ECJ0EB1A104K	B
C410	4030016930	S.CERAMIC ECJ0EB1A104K	T
C411*	4550006620	S.TANTALUM ECST0JY226R	B
C412	4030014180	S.CERAMIC ECUE1H470JCC	T
C414	4030016930	S.CERAMIC ECJ0EB1A104K	T
C415*	4550006170	S.TANTALUM ECST1AY225R	B
C416	4030016930	S.CERAMIC ECJ0EB1A104K	T
C417	4030014000	S.CERAMIC ECUE1H1R5BCQ [H]	T
	4030017560	S.CERAMIC ECJ0EC1H2R5B [M]	T
	4030017590	S.CERAMIC ECJ0EC1H070C [L]	T
C418	4030013980	S.CERAMIC ECUE1H010BCQ [MH]-except BIIS	B
	4030017370	S.CERAMIC ECJ0EC1H3R5B [L]	B
	4030017530	S.CERAMIC ECJ0EC1H0R5B [ML], [M]-BIIS	T
C419	4030007080	S.CERAMIC C1608 CH 1H 390J-T	B
C420	4030009520	S.CERAMIC C1608 CH 1H 020B-T	T
		[L]-except BIIS, [M]	T
	4030009910	S.CERAMIC C1608 CH 1H 040B-T [H]	T
C421	4030014220	S.CERAMIC ECUE1E471KBQ	T
C422	4030013850	S.CERAMIC ECUE1E102KBQ	T
C423	4030011810	S.CERAMIC C1608 JB 1A 224K-T	T
C424*	4550006320	S.TANTALUM ECST0JY475R	B
C425	4030016930	S.CERAMIC ECJ0EB1A104K	T
C426	4030016930	S.CERAMIC ECJ0EB1A104K	T
C427	4030014180	S.CERAMIC ECUE1H470JCC	T
C428	4030014180	S.CERAMIC ECUE1H470JCC	T
C429	4030014180	S.CERAMIC ECUE1H470JCC	T
C430	4030014220	S.CERAMIC ECUE1E471KBQ	T
C432	4030014220	S.CERAMIC ECUE1E471KBQ	T
C433	4030014180	S.CERAMIC ECUE1H470JCC	T
C434	4030014180	S.CERAMIC ECUE1H470JCC	T
C435	4030014180	S.CERAMIC ECUE1H470JCC	T
C436	4030014180	S.CERAMIC ECUE1H470JCC	T
C437	4030014180	S.CERAMIC ECUE1H470JCC	T
C438	4030014180	S.CERAMIC ECUE1H470JCC	T
C440	4030006860	S.CERAMIC C1608 JB 1H 102K-T	T
C441	4030004800	S.CERAMIC C2012 CH 1H 030C-T [MH]	T
	4030004810	S.CERAMIC C2012 CH 1H 040C-T [ML]	T
	4030004820	S.CERAMIC C2012 CH 1H 050C-T [H]	T
	4030004850	S.CERAMIC C2012 CH 1H 080D-T	T
		[L]-F40G except BIIS	T
	4030004860	S.CERAMIC C2012 CH 1H 090D-T [L]-F41G, [L]-BIIS	T
C442	4030017530	S.CERAMIC ECJ0EC1H0R5B [M]	B
	4030017560	S.CERAMIC ECJ0EC1H2R5B [L]	B
C443	4030013850	S.CERAMIC ECUE1E102KBQ	T
C444	4030014490	S.CERAMIC ECUE1H331KBQ	B
C445	4030013940	S.CERAMIC C1005 JB 1E 223K-T-N	T
C446	4030017250	S.CERAMIC ECUE1E821KBQ	T
C447	4030017250	S.CERAMIC ECUE1E821KBQ	T
C448	4030013960	S.CERAMIC C1005 JB 1C 473K-T-N	T
C449	4030016930	S.CERAMIC ECJ0EB1A104K	T
C450	4030016930	S.CERAMIC ECJ0EB1A104K	B
C451	4030016930	S.CERAMIC ECJ0EB1A104K	B
C452	4030016930	S.CERAMIC ECJ0EB1A104K	T
C453	4030014140	S.CERAMIC ECUE1H150JCC	T
C454	4030014240	S.CERAMIC ECUE1H180JCC	T
C455	4030016930	S.CERAMIC ECJ0EB1A104K	T
C456	4030016930	S.CERAMIC ECJ0EB1A104K	B
C457	4030014070	S.CERAMIC ECUE1H040BCQ	Other
	4030017570	S.CERAMIC ECJ0EC1H040B [BIIS]	T

[L]: L-band, [ML]: ML-band, [MH]: MH-band, [H]: H-band, [M]: ML and MH bands, [GT]: IC-F40GT/F41GT, [GS]: IC-F40GS/F41GS, [F40G]: IC-F40GT/F40GS, [F41G]: IC-F41GT/F41GS, [IS]: Intrinsically safe version, [BIIS]: BIIS version

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)

*=Safety critical components

S.=Surface mount

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION		M.
C458	4030014200	S.CERAMIC	ECUE1H101JCQ	T
C459	4030017420	S.CERAMIC	ECJ0EC1H470J	
			[F41G], [BIIS] only	B
C460	4030017630	S.CERAMIC	ECJ0EC1H120J	
			[F41G], [BIIS] only	T
C461	4030017380	S.CERAMIC	ECJ0EC1H050B	
			[F41G], [BIIS] only	T
C462	4030017380	S.CERAMIC	ECJ0EC1H050B	
			[F41G], [BIIS] only	T
C463	4030017420	S.CERAMIC	ECJ0EC1H470J	
			[F41G], [BIIS] only	T
C464	4030017420	S.CERAMIC	ECJ0EC1H470J	
			[F41G], [BIIS] only	T
C465	4030017420	S.CERAMIC	ECJ0EC1H470J	
			[F41G], [BIIS] only	T
C466	4030017420	S.CERAMIC	ECJ0EC1H470J	
			[F41G], [BIIS] only	T
C467	4030017380	S.CERAMIC	ECJ0EC1H050B	
			[F41G], [BIIS] only	T
C468	4030017380	S.CERAMIC	ECJ0EC1H050B	
			[F41G], [BIIS] only	B
C469	4030017380	S.CERAMIC	ECJ0EC1H050B	
			[F41G], [BIIS] only	B
C470	4030017380	S.CERAMIC	ECJ0EC1H050B	
			[F41G], [BIIS] only	B
C471	4030017420	S.CERAMIC	ECJ0EC1H470J	
			[F41G], [BIIS] only	B
C472	4030017420	S.CERAMIC	ECJ0EC1H470J	
			[F41G], [BIIS] only	B
C473	4550006700	S.TANTALUM	ECST1AY106R	
			[F41G], [BIIS] only	T
C474	4030009520	S.CERAMIC	C1608 CH 1H 020B-T	
			[H] only	T
J1	6510018430	S.CONNECTOR	AXN330C038P	T
J2	6510018430	S.CONNECTOR	AXN330C038P	T
J3	6510022360	S.CONNECTOR	26FLZ-SM1-TB	T
F1	5210000710	S.FUSE	KAB 2402 322 NA29	T
	5210000880	S.FUSE	043403.5NRP	T
			[F41G], [IS] Other	
S1	2250000180	ENCODER	EC10SP16-47	B
W2	7030003860	S.RESISTOR	ERJ3GE JPW V	B
W3	7030003860	S.RESISTOR	ERJ3GE JPW V	T
W5	8900009790	CABLE	OPC-972	T
W7	7030003860	S.RESISTOR	ERJ3GE JPW V	T
W8	7030009970	S.JUMPER	MJ-0.1	T
W9	7030003860	S.RESISTOR	ERJ3GE JPW V	T
W10	7030000010	S.RESISTOR	MCR10EZHZ JPW (000)	T
W11	7030010040	S.RESISTOR	ERJ2GE-JPW	T
W12	7030010040	S.RESISTOR	ERJ2GE-JPW [F40G] except BIIS	T
W13	7030003860	S.RESISTOR	ERJ3GE JPW V	T
			[H]	
EP1	0910053620	PCB	B 5619	[F41G], [BIIS]
	0910055274	PCB	B 5488D	Other
EP2	6910013350	S.BEAD	BLM15AG121PN1D	[F41G], [BIIS] only

[L]: L-band, [ML]: ML-band, [MH]: MH-band, [H]: H-band, [M]: ML and MH bands,
 [GT]: IC-F40GT/F41GT, [GS]: IC-F40GS/F41GS, [F40G]: IC-F40GT/F40GS,
 [F41G]: IC-F41GT/F41GS, [IS]: Intrinsically safe version, [BIIS]: BIIS version

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)

*=Safety critical components

S.=Surface mount

SECTION 7 MECHANICAL PARTS AND DISASSEMBLY

[CHASSIS PARTS]

REF NO.	ORDER NO.	DESCRIPTION	QTY.
MP1	8210017211	2337 front panel-1 assembly [GT]	1
	8210017350	2337 S-front panel assembly [GS]	1
MP2	8310049450	2337 window plate	1
MP4	8930052850	2337 release button	1
MP5	8930052970	2337 PTT plate	1
MP8	8210017100	2337 rear panel	1
MP9	8210017080	2337 reflector	1
MP10	8930052981	2337 S.W plate-1	1
MP12	8010018251	2337 chassis-1	1
MP13	8930052640	2337 key board [GT]	1
	8930053170	2337 4-key [GS]	1
MP14	8930053650	2336 main seal	1
MP16	8930052840	2337 T-rubber	1
MP17	8930054540	2336 top key	1
MP18	8930052991	2337 terminal-1	1
MP19	8610010910	Knob N281	1
MP20	8610010920	Knob N282	1
MP21	8510013161	2337 main shield-1	1
MP22	8930053670	2337 side plate	1
MP23	8930053000	2337 window sheet	1
MP24	8610007510	Knob spring No.7800	1
MP26	8830001480	VR nut (O)	1
MP29	8930053210	2337 microphone sheet	1
MP32	8830001500	2337 nut	1
MP33	8830001511	Nut (I)-1	1
MP34	8810009220	Screw FH B0 M2 × 8 ZK (BT)	2
MP35	8930042080	1922 minus terminal	1
MP36	8610007920	LECTRA spring #1500	1
MP37	8950004420	1652 9-pin connector	1
MP40	8810008970	Screw FH BT No.0 M2 × 3.5 NI-ZU	6
MP41	8810009180	Screw FH BT No.0 M2 × 5 NI-ZU	1
MP43	8210017091	2337 terminal holder-1	1
MP44	8950005311	Antenna connector-103-1	1
MP49	8510013220	2337 antenna plate	1
MP50	8930053440	2337 A-PTT plate	1
MP51	8930053431	Sponge (GP)-1	2
MP52	8820000801	1327 screw-1	2
MP53	8930053630	Seal O-ring (AH)	1
MP54	8930053680	Spring (AG)	1
MP55	8810004890	Screw PH No.0 M2 × 6 ZK	2
MP56	8810005360	Screw PH No.0 M2 × 3 ZK	10
MP57	8810009560	Screw PH BT M2 × 6 ZK	2
MP58	8810005700	Screw PH No.0 M2 × 4 ZK	3
MP59	8810009510	Screw PH BT M2 × 4 NI-ZU	8
MP60	8930046000	1903 microphone sponge [GS] only	1
MP61	8930053660	2337 side seal	1
MP63	8930053880	2337 key sheet [GT]	1
	8930054010	2337 4-key sheet [GS]	1
MP64	8930051781	Insulation sheet GA-1	1
MP65	8930053890	2337 T-K sheet	1
MP66	8930054230	2337 main plate [F41G] only	1
MP67	8930023660	Sponge (CU) [H-band] only	1
MP68	8930030380	Ferrite sheet (C) [F41G] only	1
MP69	8930052270	Shield spong (D) [F41G] only	1
MP72	8310051560	2337 caution seal (BG) [USA] only	1
MP74	8930058080	O-ring (AR) [GT] only	1

[FRONT UNIT]

REF NO.	ORDER NO.	DESCRIPTION	QTY.
DS10	5030001870	LCD EDMUD1FA0	1
SP1*	2510001060	Speaker K036NA500-47	1
MC1	7700002310	Microphone EM-140	1
W1	7120000470	Jumper ERDS2T0	2
MP1	8510013230	2337 LOGIC shield	1
MP2	8930053320	2337 LOGIC spring	1
MP3	8930034250	Sponge (DS)	1
MP4	8930050030	Sponge (GI)	1

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	QTY.
W5	8900009790	Flexible cable OPC-972	1
MP1	8510013000	2336 VCO case	1
MP2	8510011180	1923 VCO cover	1
MP3	8410002370	2337 PA heatsink	1
MP6	8950005330	M.connector 2337 9-pin base	1
MP7	8950005320	M.connector 2337 contact	1
MP8	8510013242	2337 VR shield-2	1
MP11	8930053460	Thermally sheet (Q)	1
MP12	8930053110	Aluminium sheet (AE) [F41G] only	1

Screw abbreviations

B0, BT: Self-tapping PH: Pan head FH: Flat head
 NI-ZU: Nickel-Zinc ZK: Black

[GT] : IC-F40GT/F41GT

[GS] : IC-F40GS/F41GS


[F40G]: IC-F40GT/F40GS


[F41G]: IC-F41GT/F41GS

[ACCESSORIES]

REF NO.	ORDER NO.	DESCRIPTION	QTY.
EP1	Optional product	Antenna FA-SC25U [L-band]	1
	Optional product	Antenna FA-SC57U [M-band]	1
	Optional product	Antenna FA-SC72U [H-band]	1
EP2*	Optional product	Battery BP-210FM	1
		for intrinsically safe version	
		Battery BP-210 for other version	1
MP1	8010019360	MB-74N	1
MP2	8210017071	2337 C-panel-1	1
MP3	8810003700	ICOM screw B4	1

* : Safety critical components

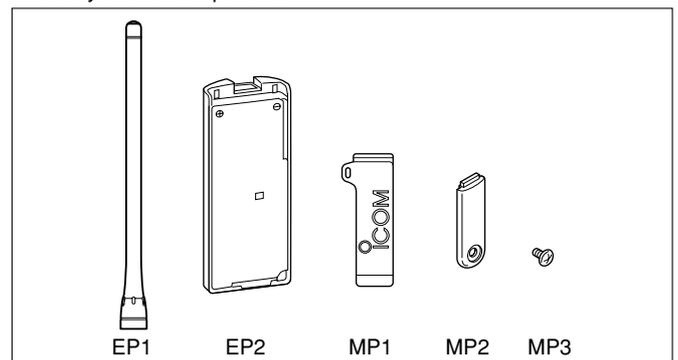

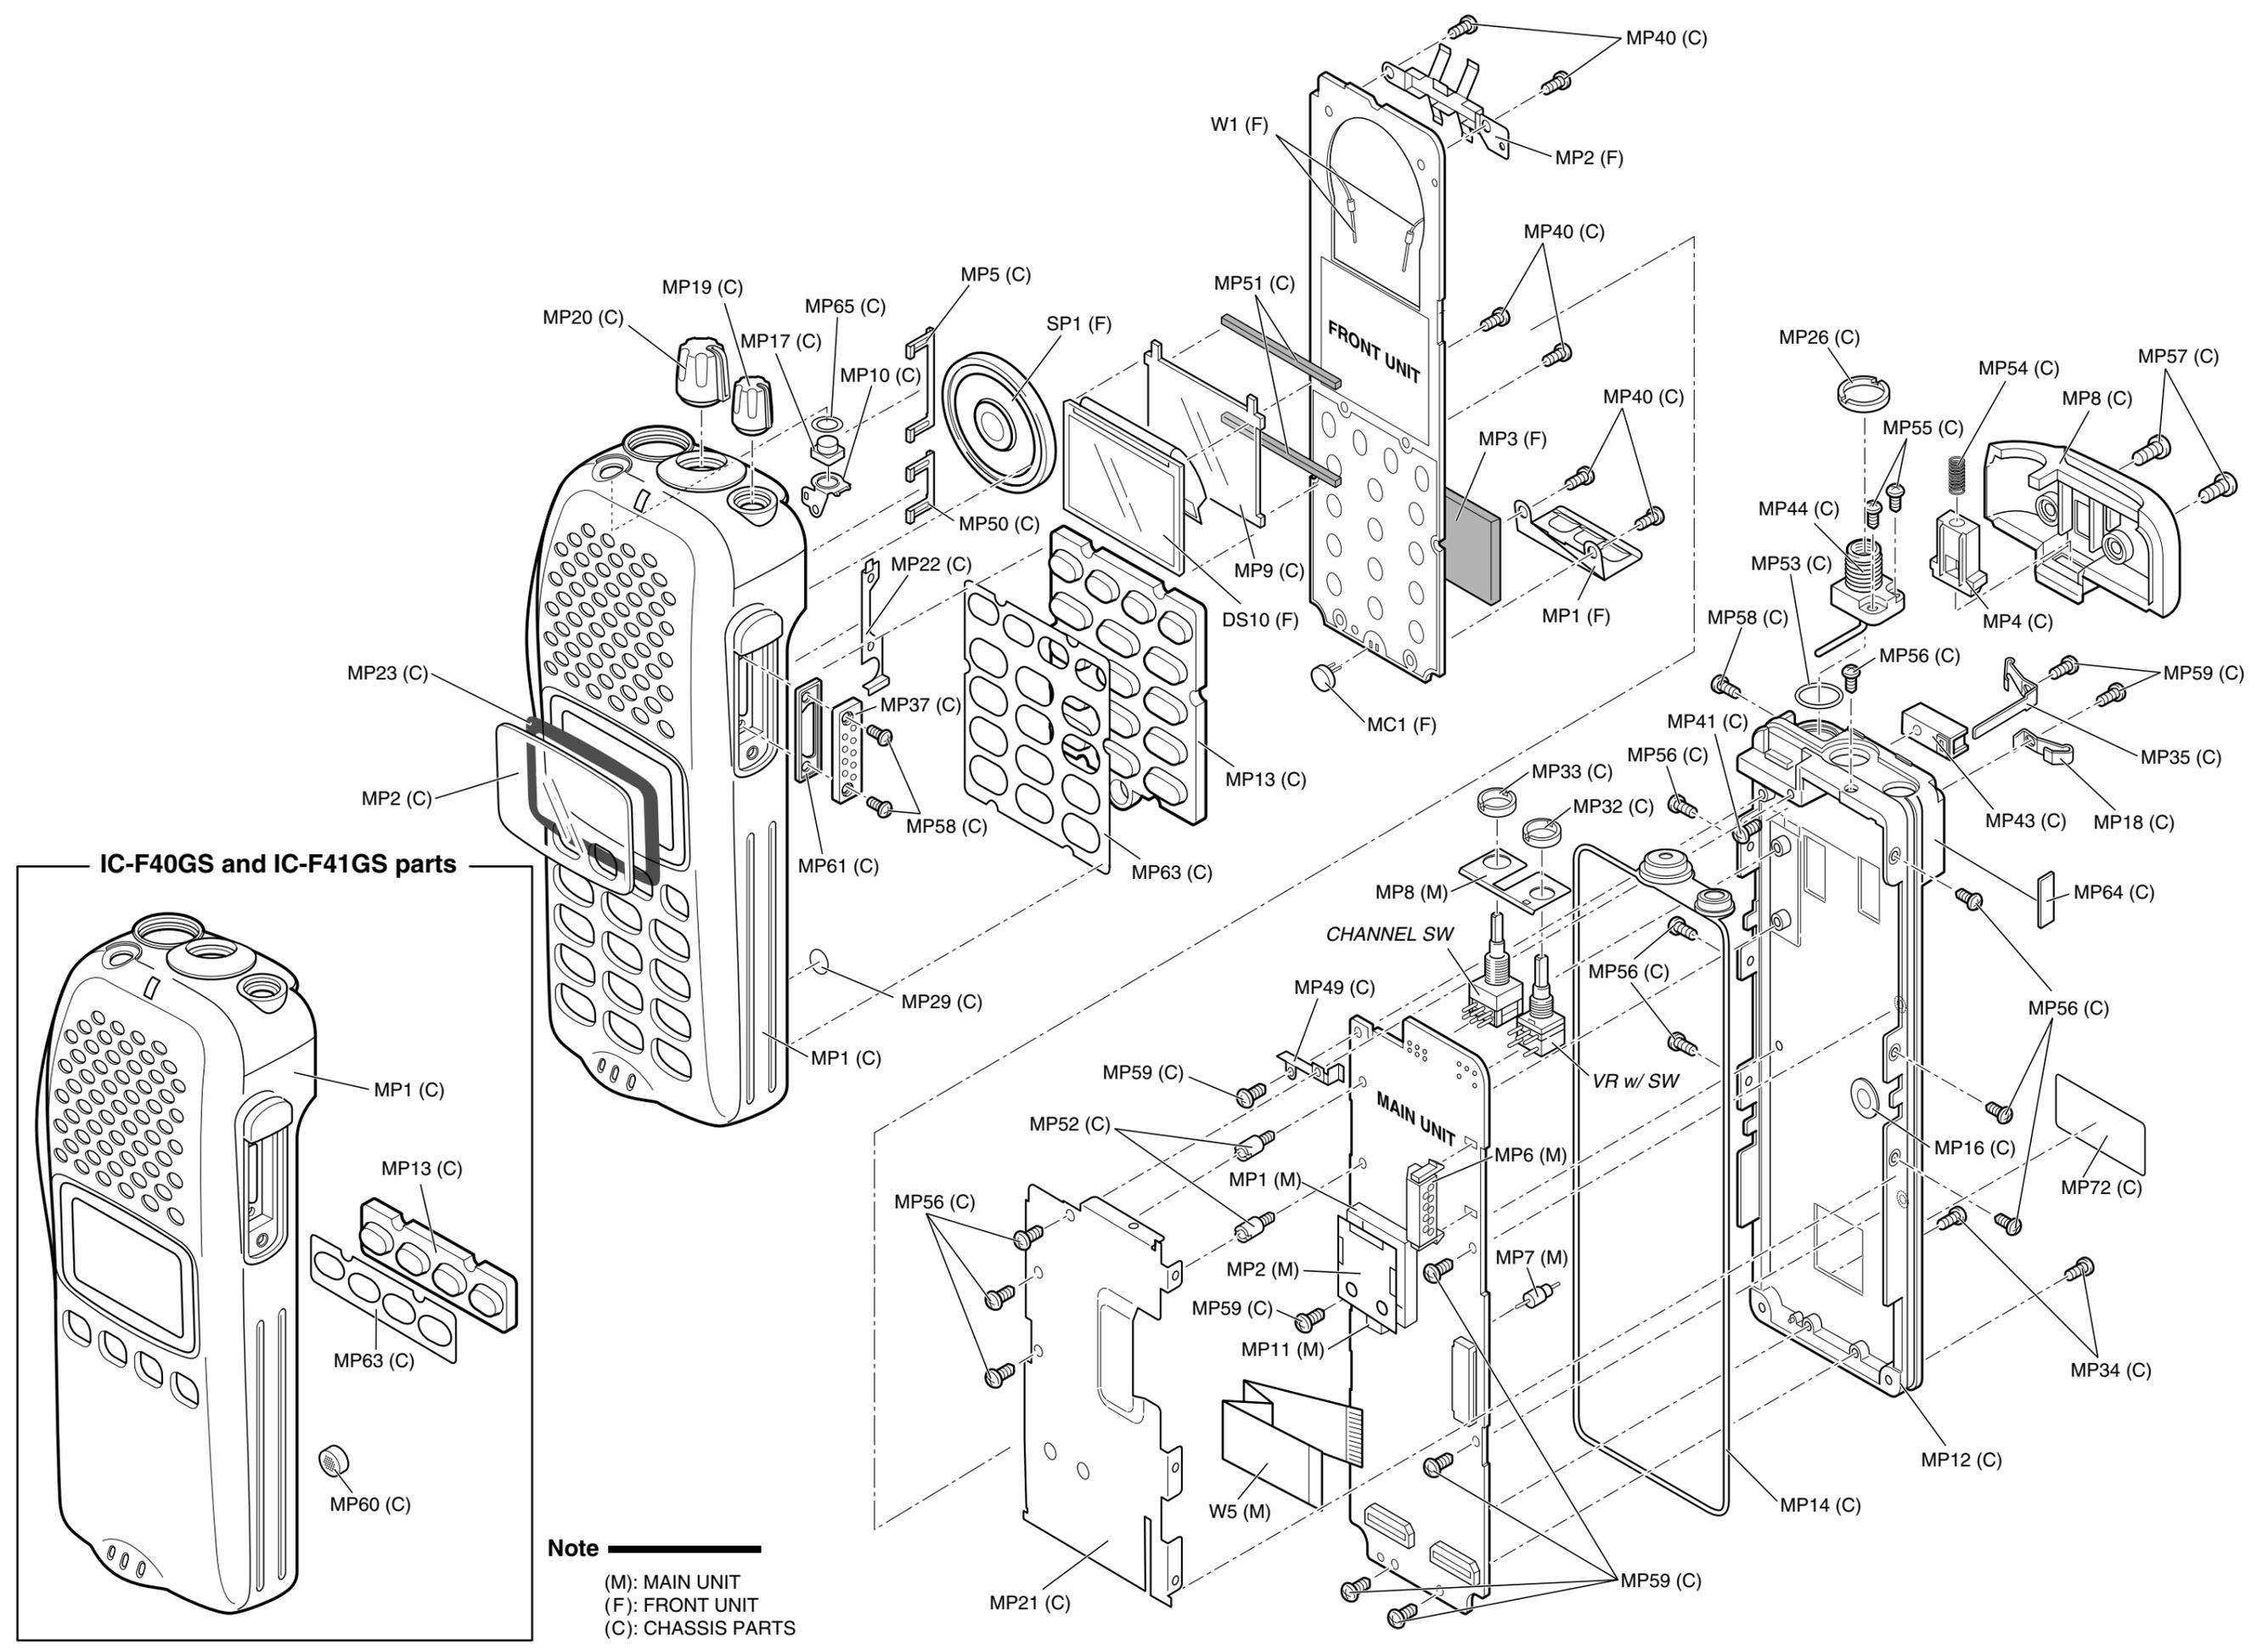

Note
 (M): MAIN UNIT
 (F): FRONT UNIT
 (C): CHASSIS PARTS

SECTION 8 SEMI-CONDUCTOR INFORMATION

8 - 1 TRANSISTORS AND FETS

NAME	SYMBOL	INSIDE VIEW
2SA1362 GR	AEG	
2SB1132 R	BARB	
2SC3585 R44 2SC4081 R 2SC4116 BL 2SC4213 B 2SC4215 O 2SC4226 R25 2SC5107 O	R44 BR LL AB QO R25 MFO	
2SK880-Y	XY	
2SK1829	K1	
2SK2973	K1	
2SK2974	K2974	

NAME	SYMBOL	INSIDE VIEW
3SK206-T1 U78 3SK293	U78 UF	
CPH3403-TL	KC	
DTA144EUA	16	
DTC144EUA	26	
DTC144TE TL	06	
UN911H	6P	
XP1214	9H	
XP6501 AB	5N	

8 - 2 DIODES


NAME	SYMBOL	INSIDE VIEW
1SS355 1SV307	A TX	
1SS375 MA742 RB706F-40	FH M1U 3J	
1SV245 HVC375BTRF HVU350BTRF	T3 B8 B0	
DAN202U	N	
DAP202U	P	
HSU88TRF MA111 MA2S111	9 1B A	
MA6S121	M2D	

NAME	SYMBOL	INSIDE VIEW
MA77	4B	
MA8030-H MA8033-H MA8062-M	3^0 3^3 6-2	

SECTION 9 BOARD LAYOUTS

9 - 1 FRONT UNIT


• TOP VIEW

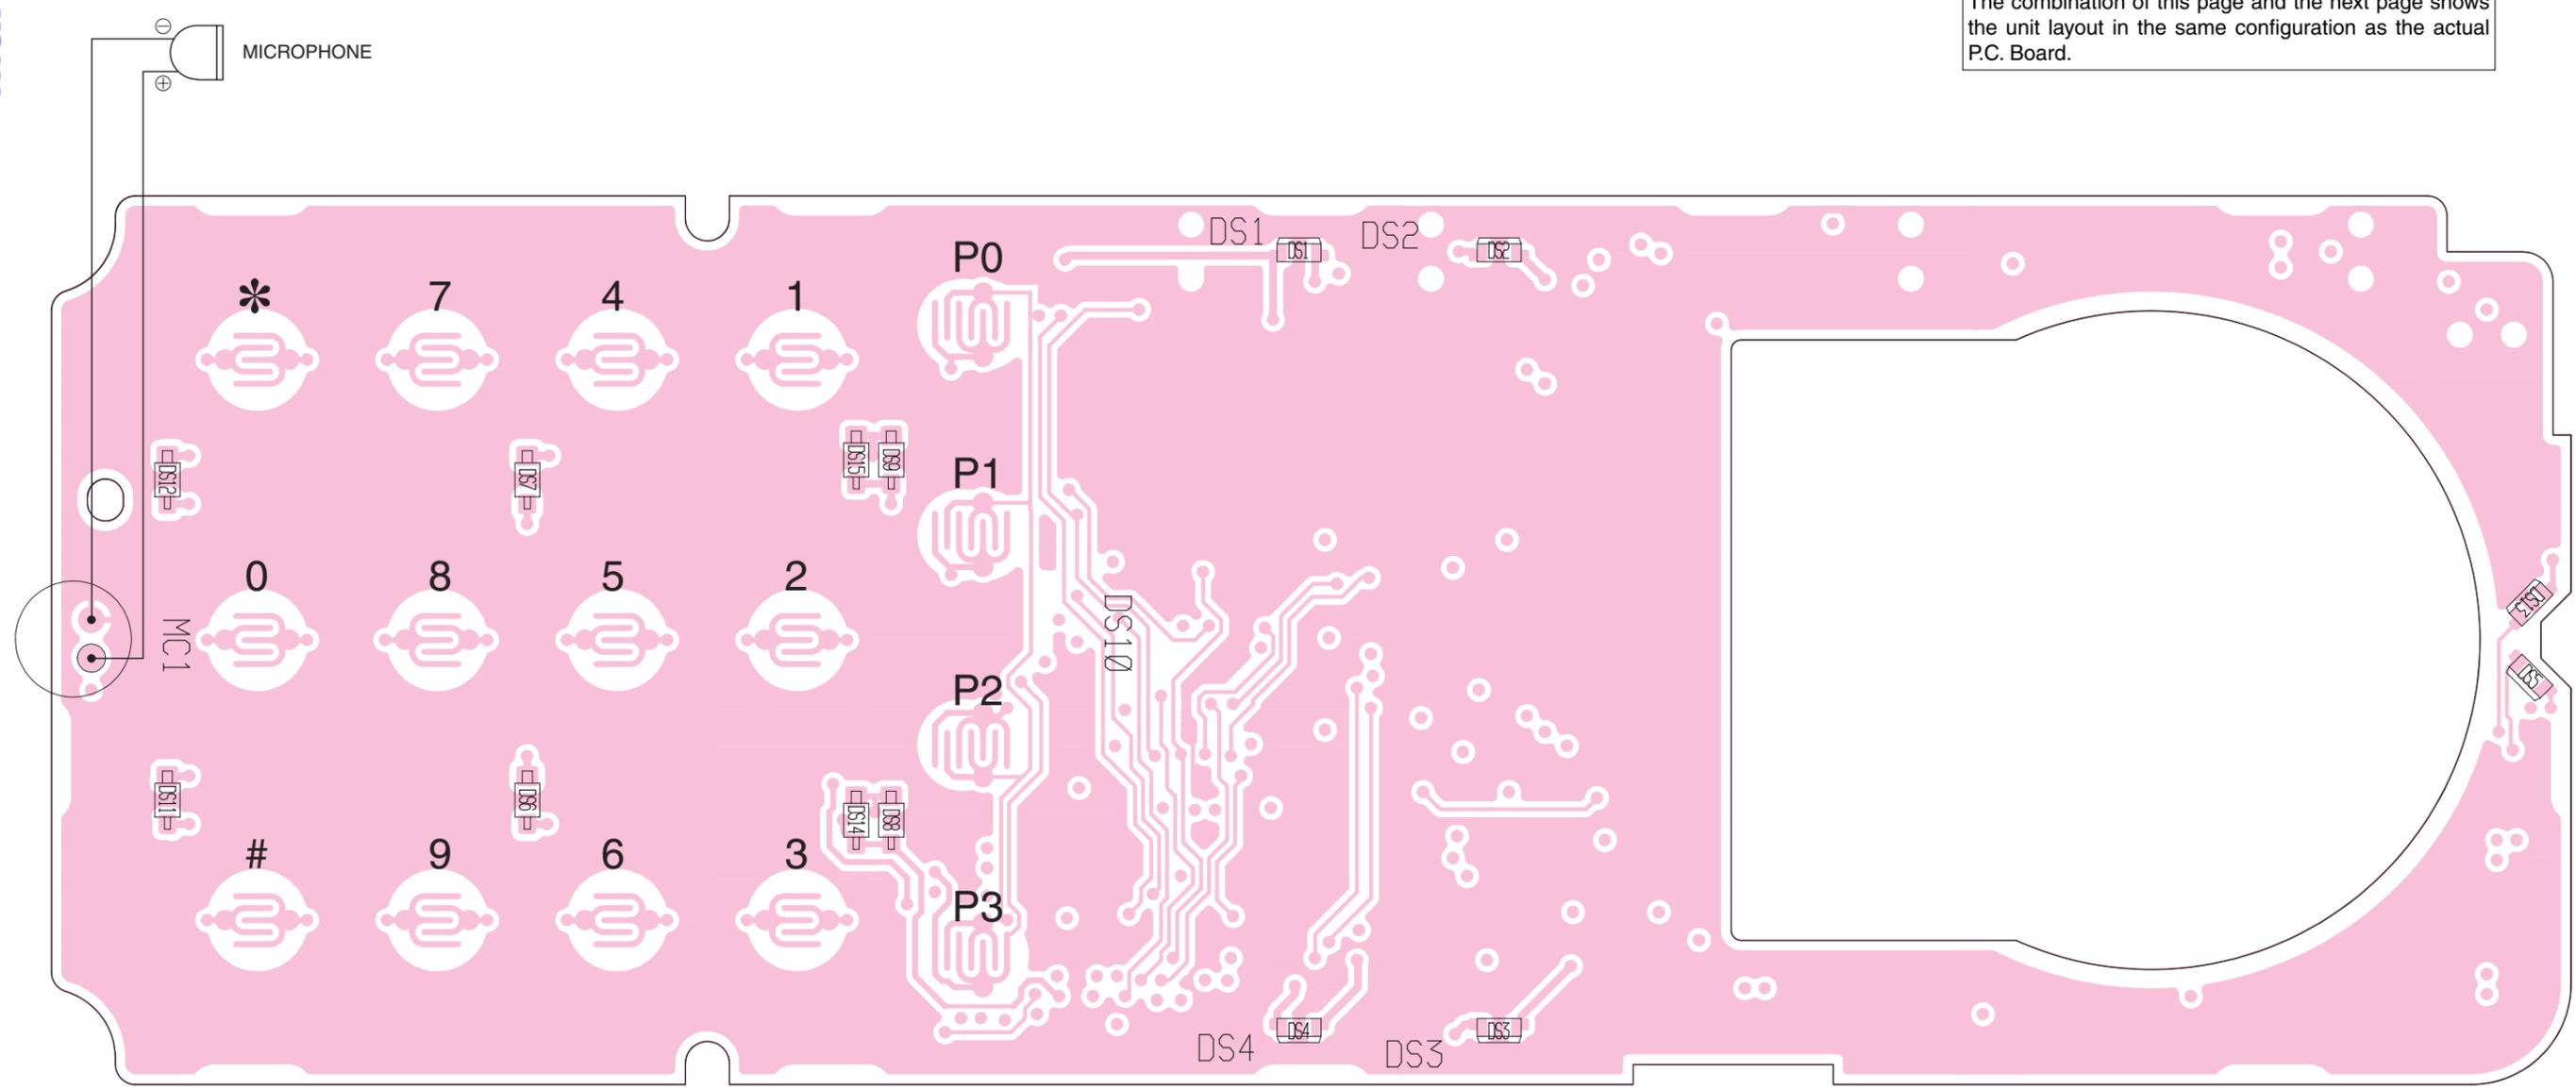

The combination of this page and the next page shows the unit layout in the same configuration as the actual P.C. Board.


FRONT unit
• **BOTTOM VIEW**

The combination of this page and the previous page shows the unit layout in the same configuration as the actual P.C. Board.

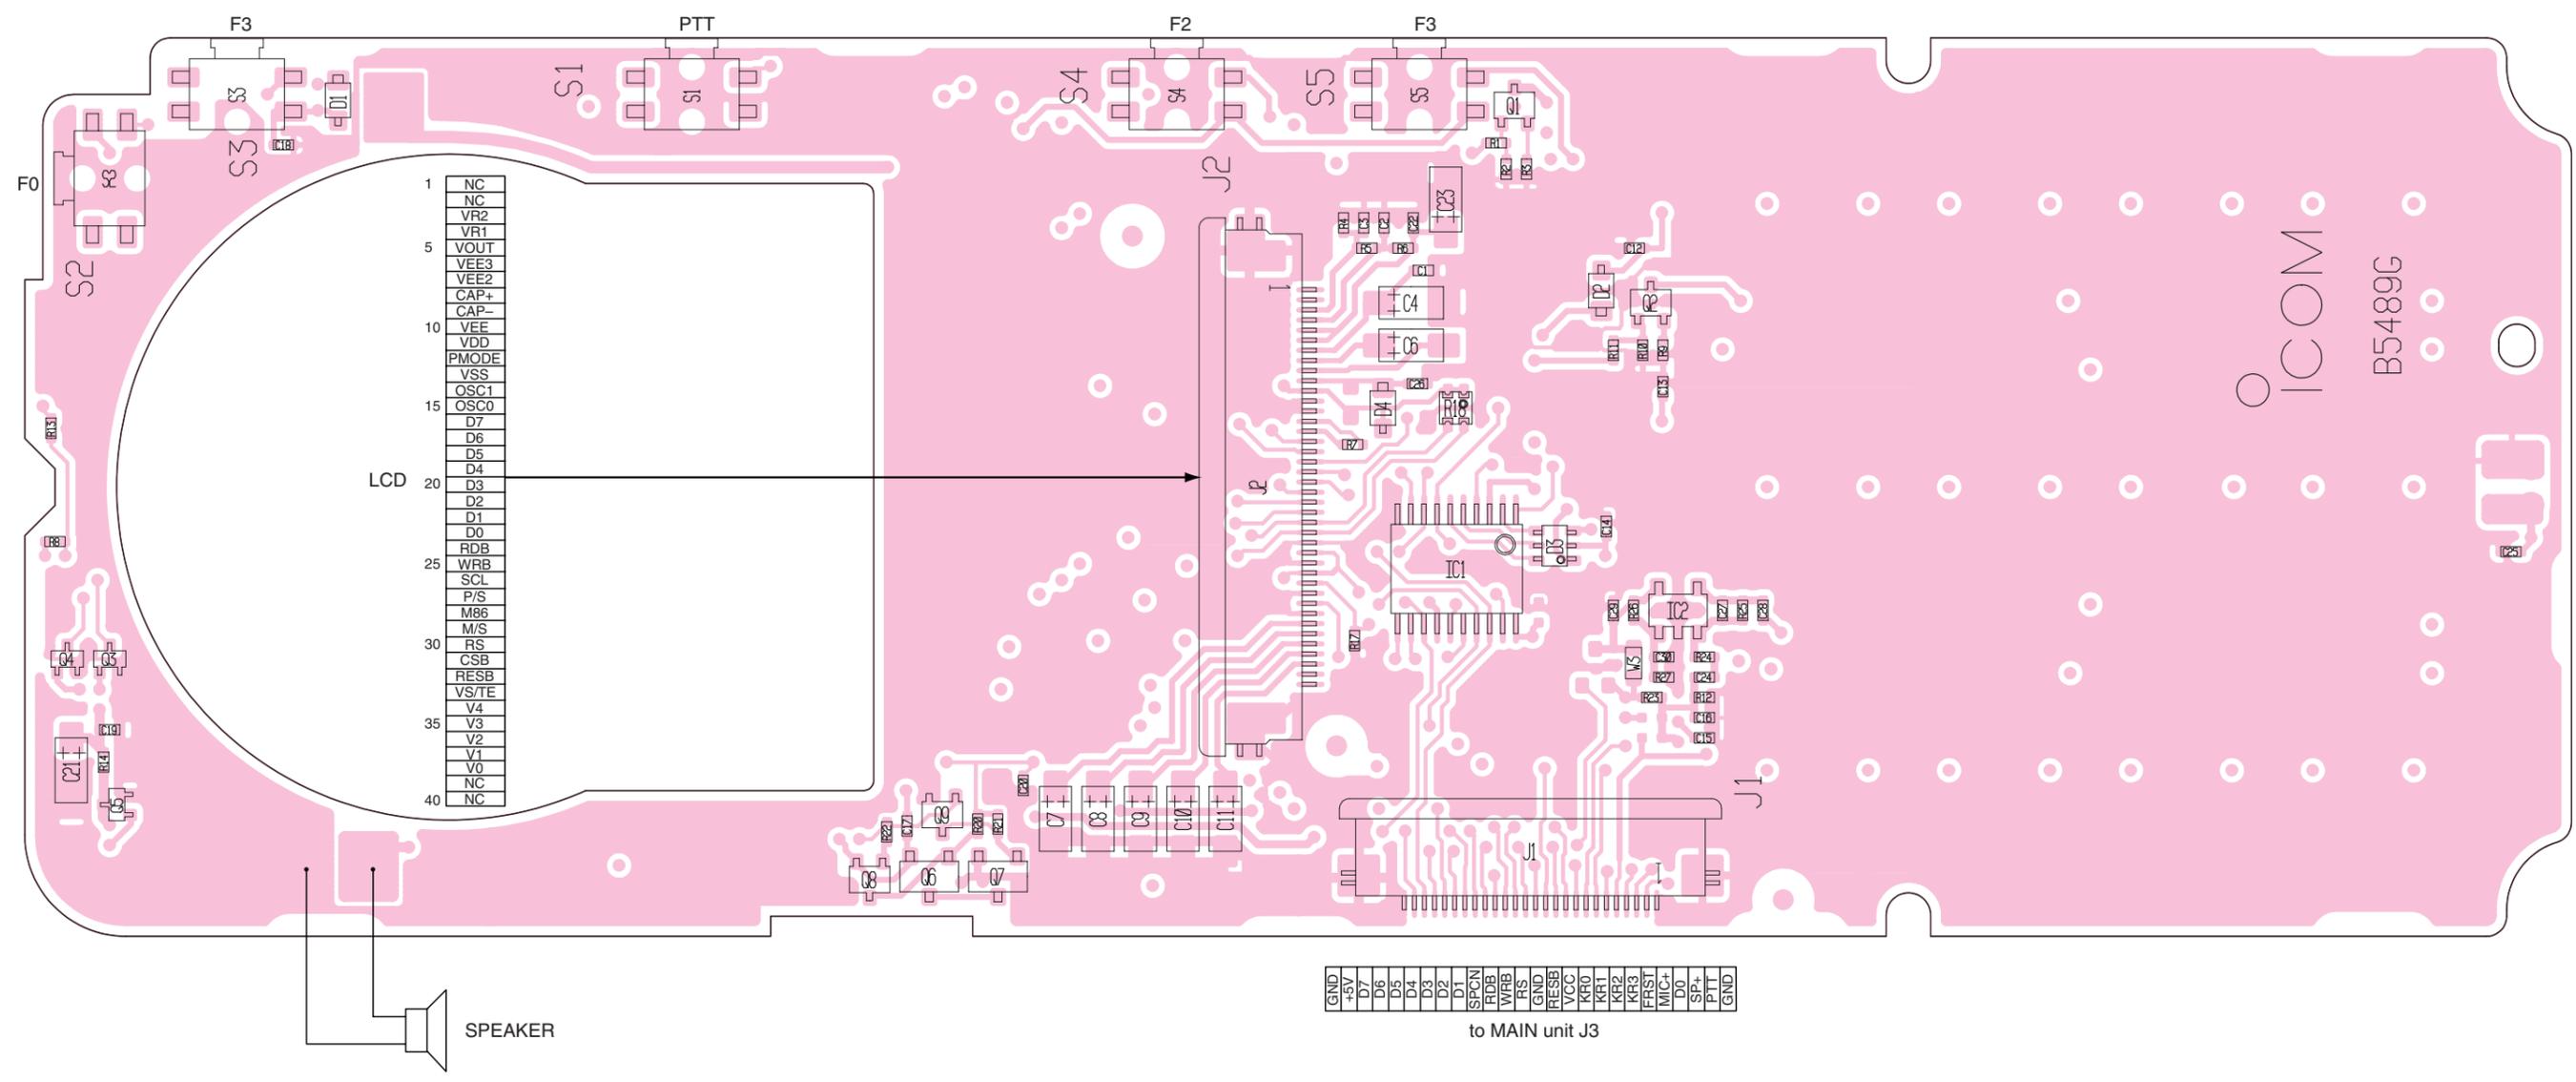


9 - 2 F40G MAIN UNIT

• TOP VIEW

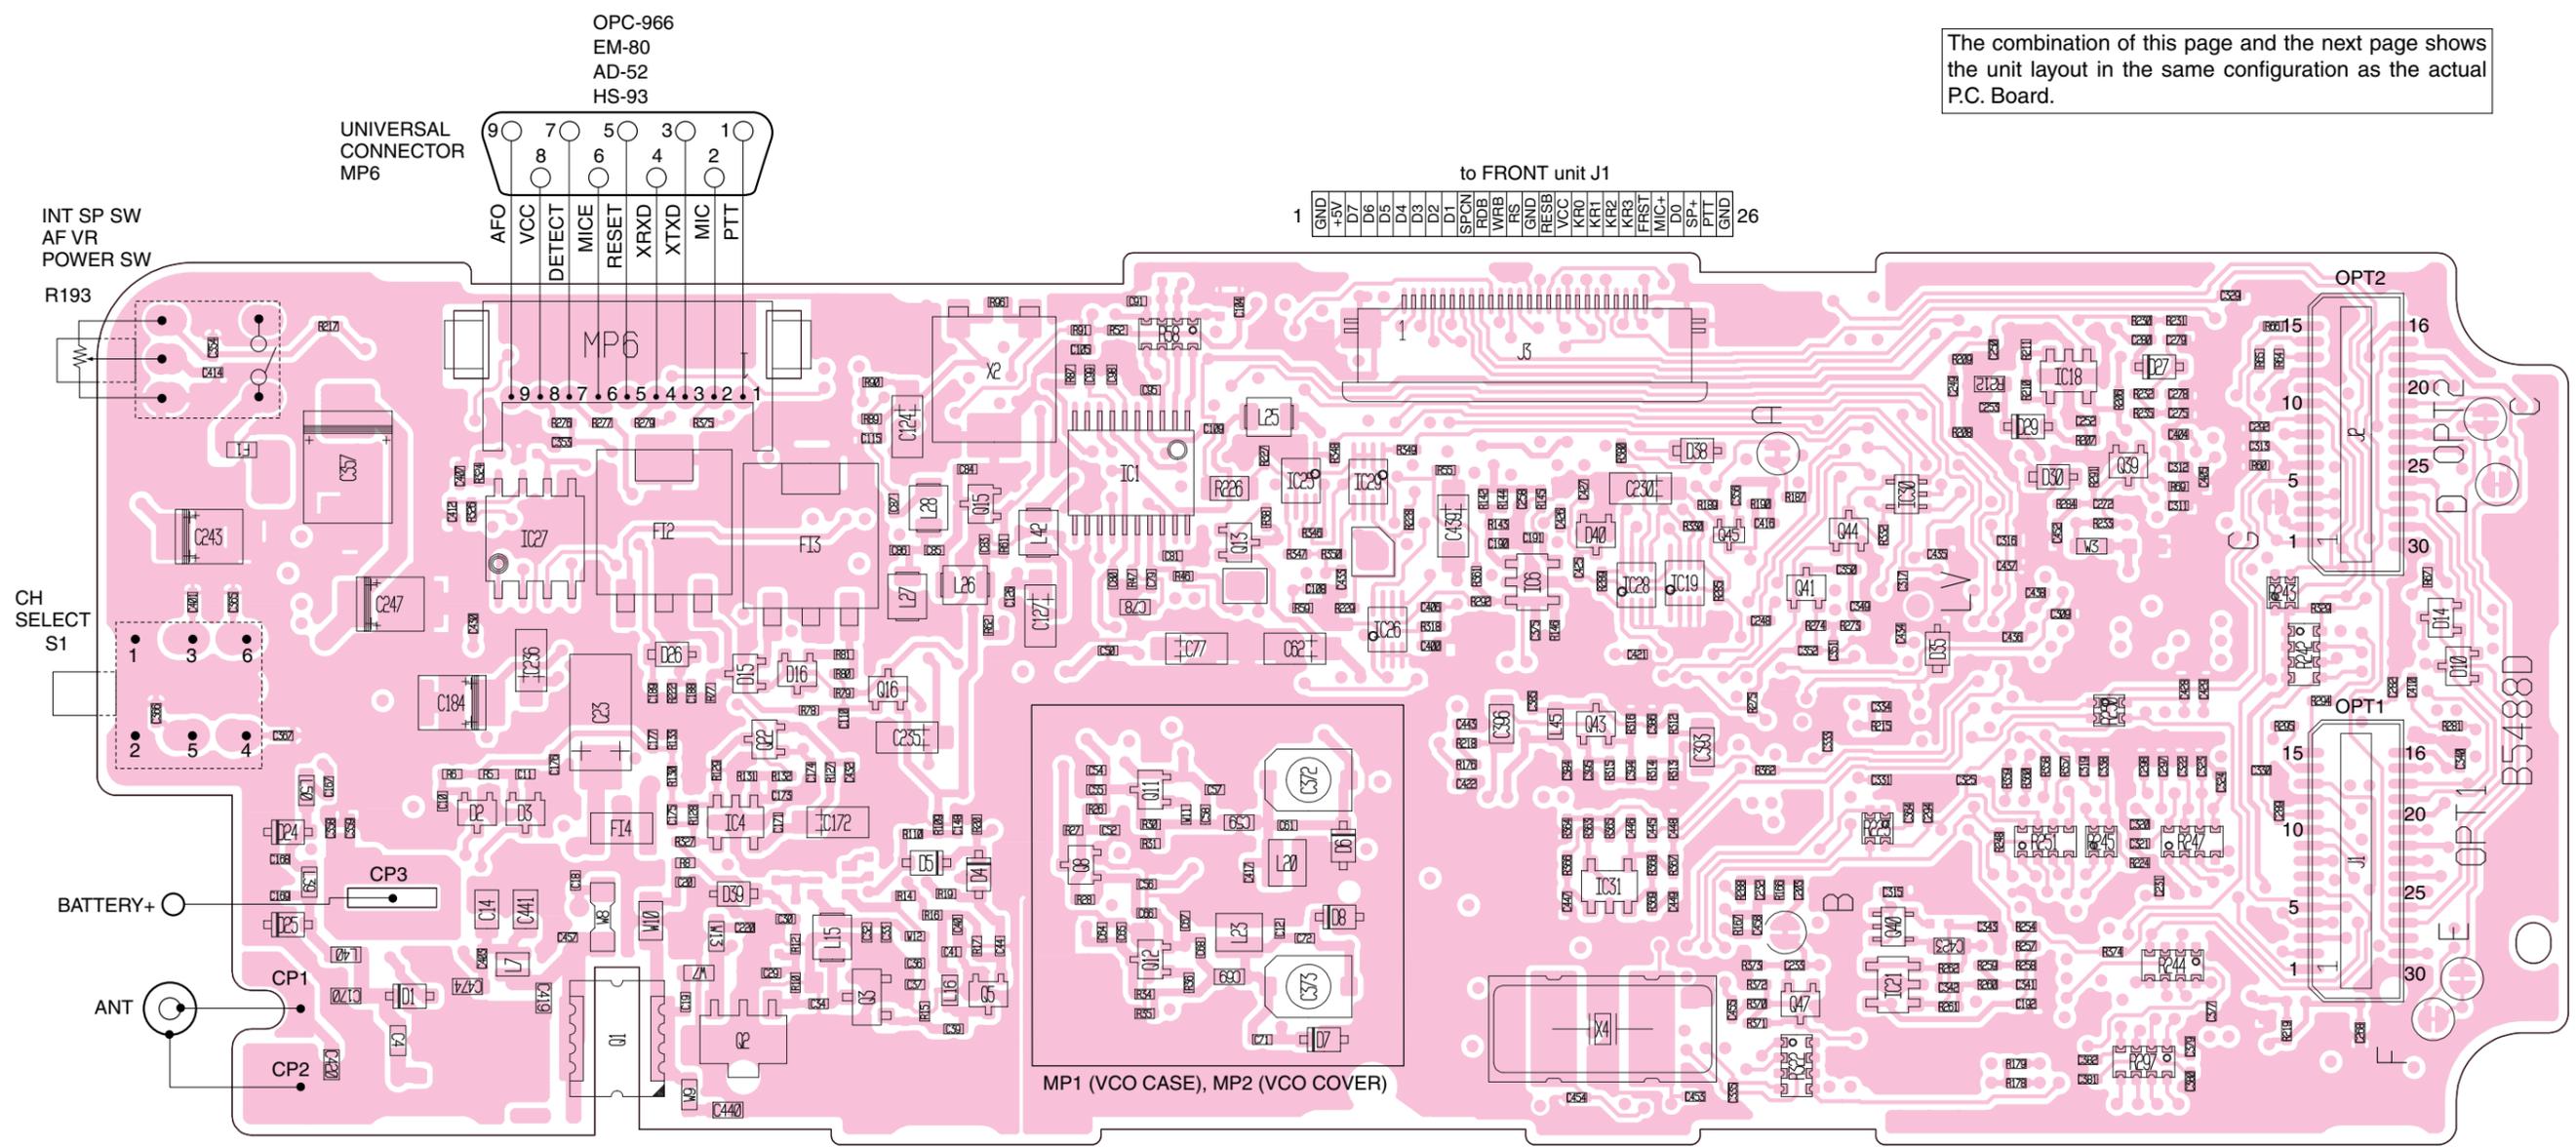


F40G (MAIN unit)
• BOTTOM VIEW

The combination of this page and the previous page shows the unit layout in the same configuration as the actual P.C. Board.

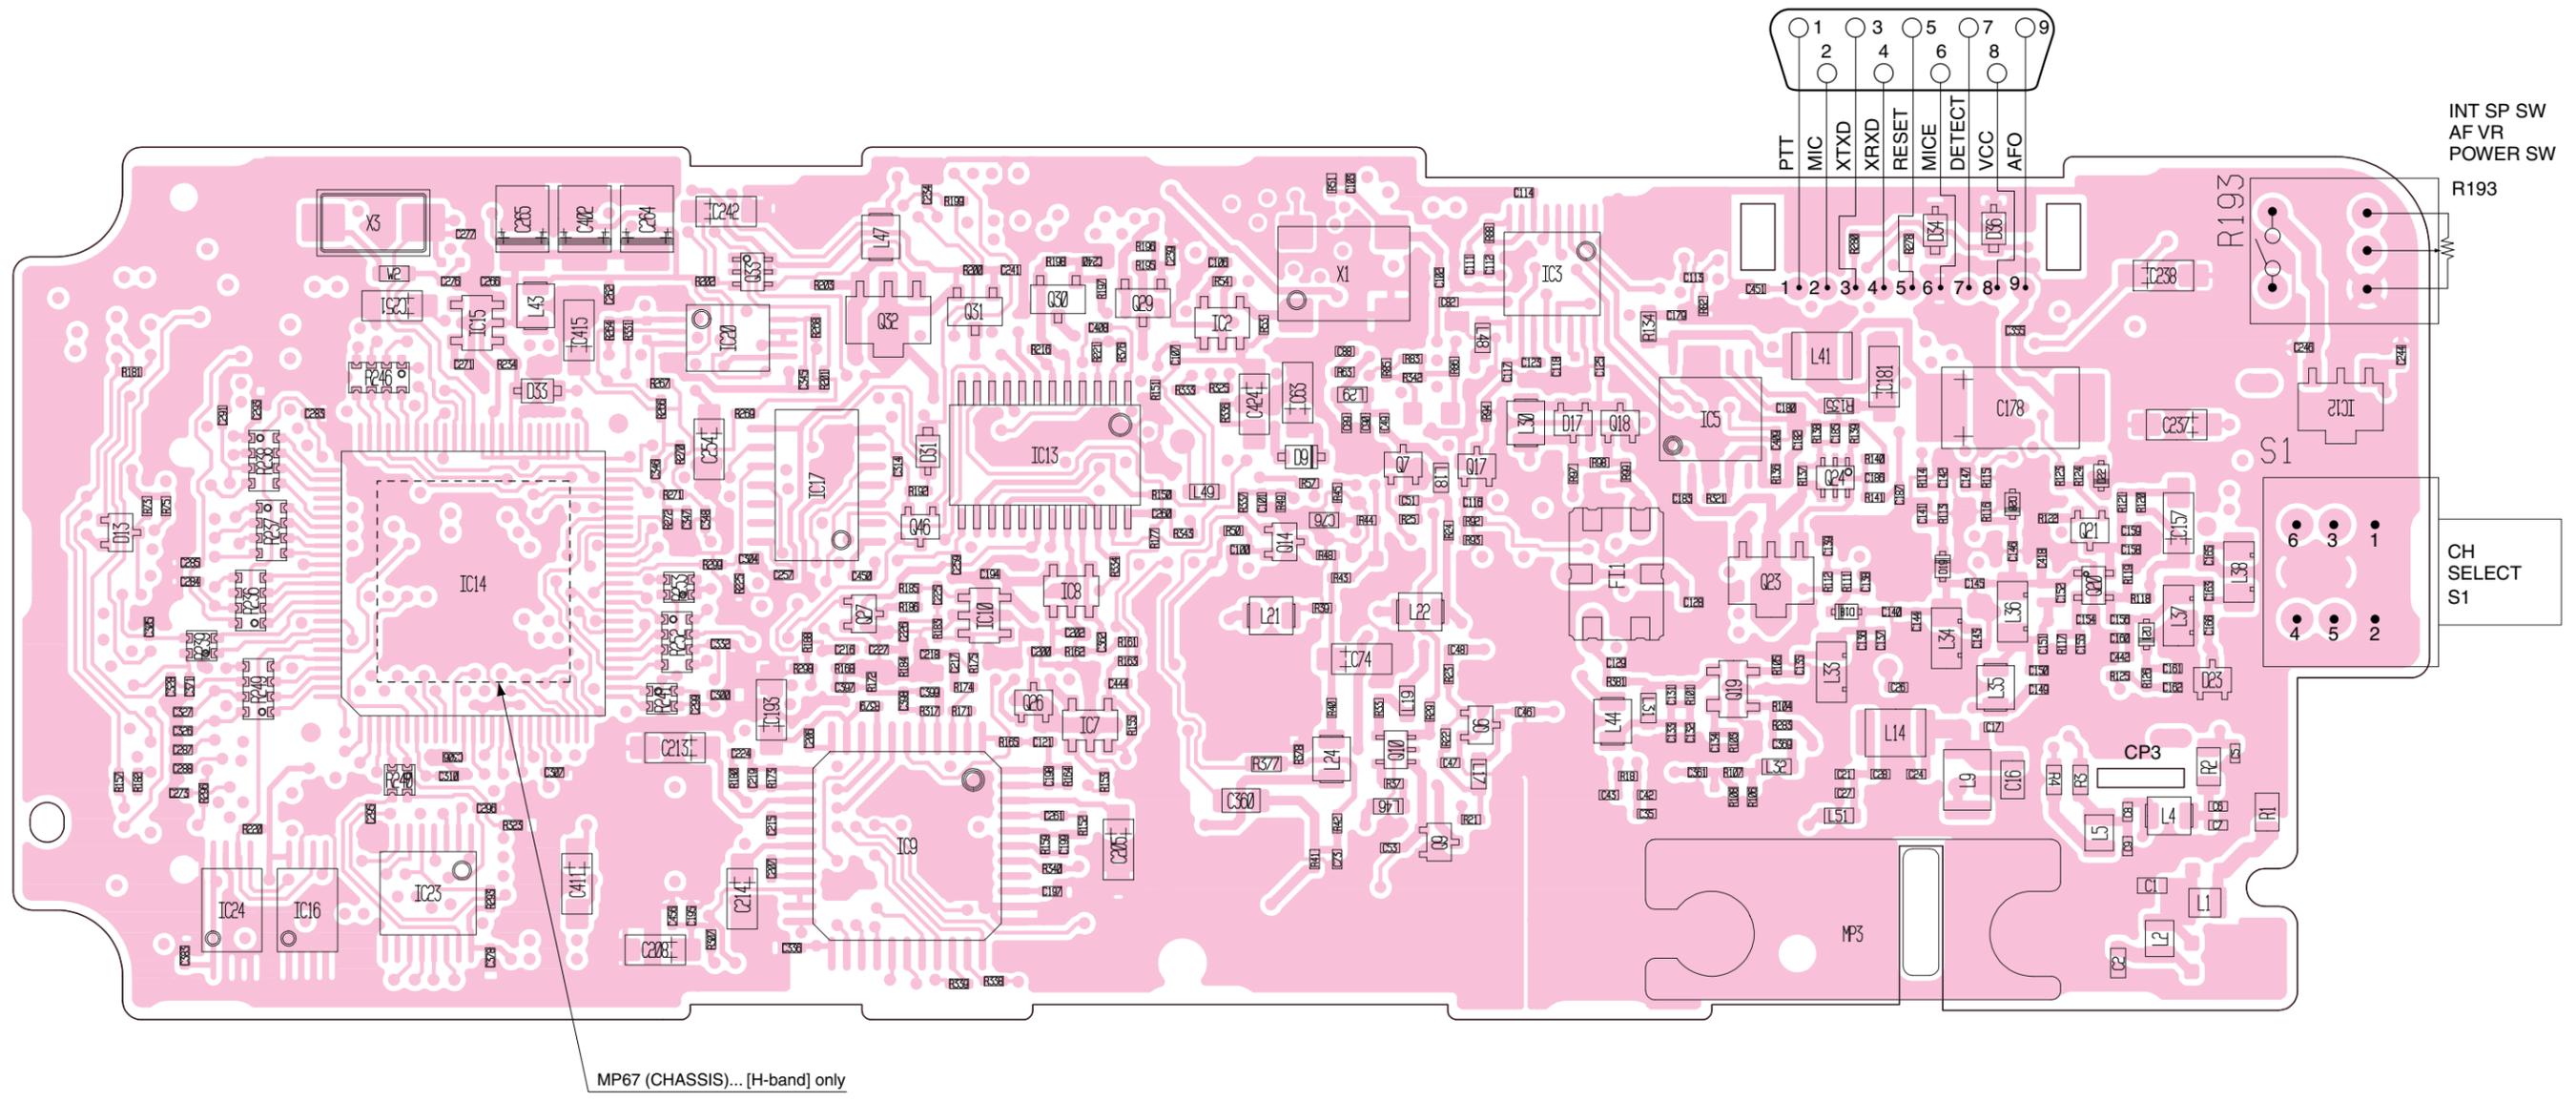

9 - 3 F41G MAIN UNIT


• TOP VIEW

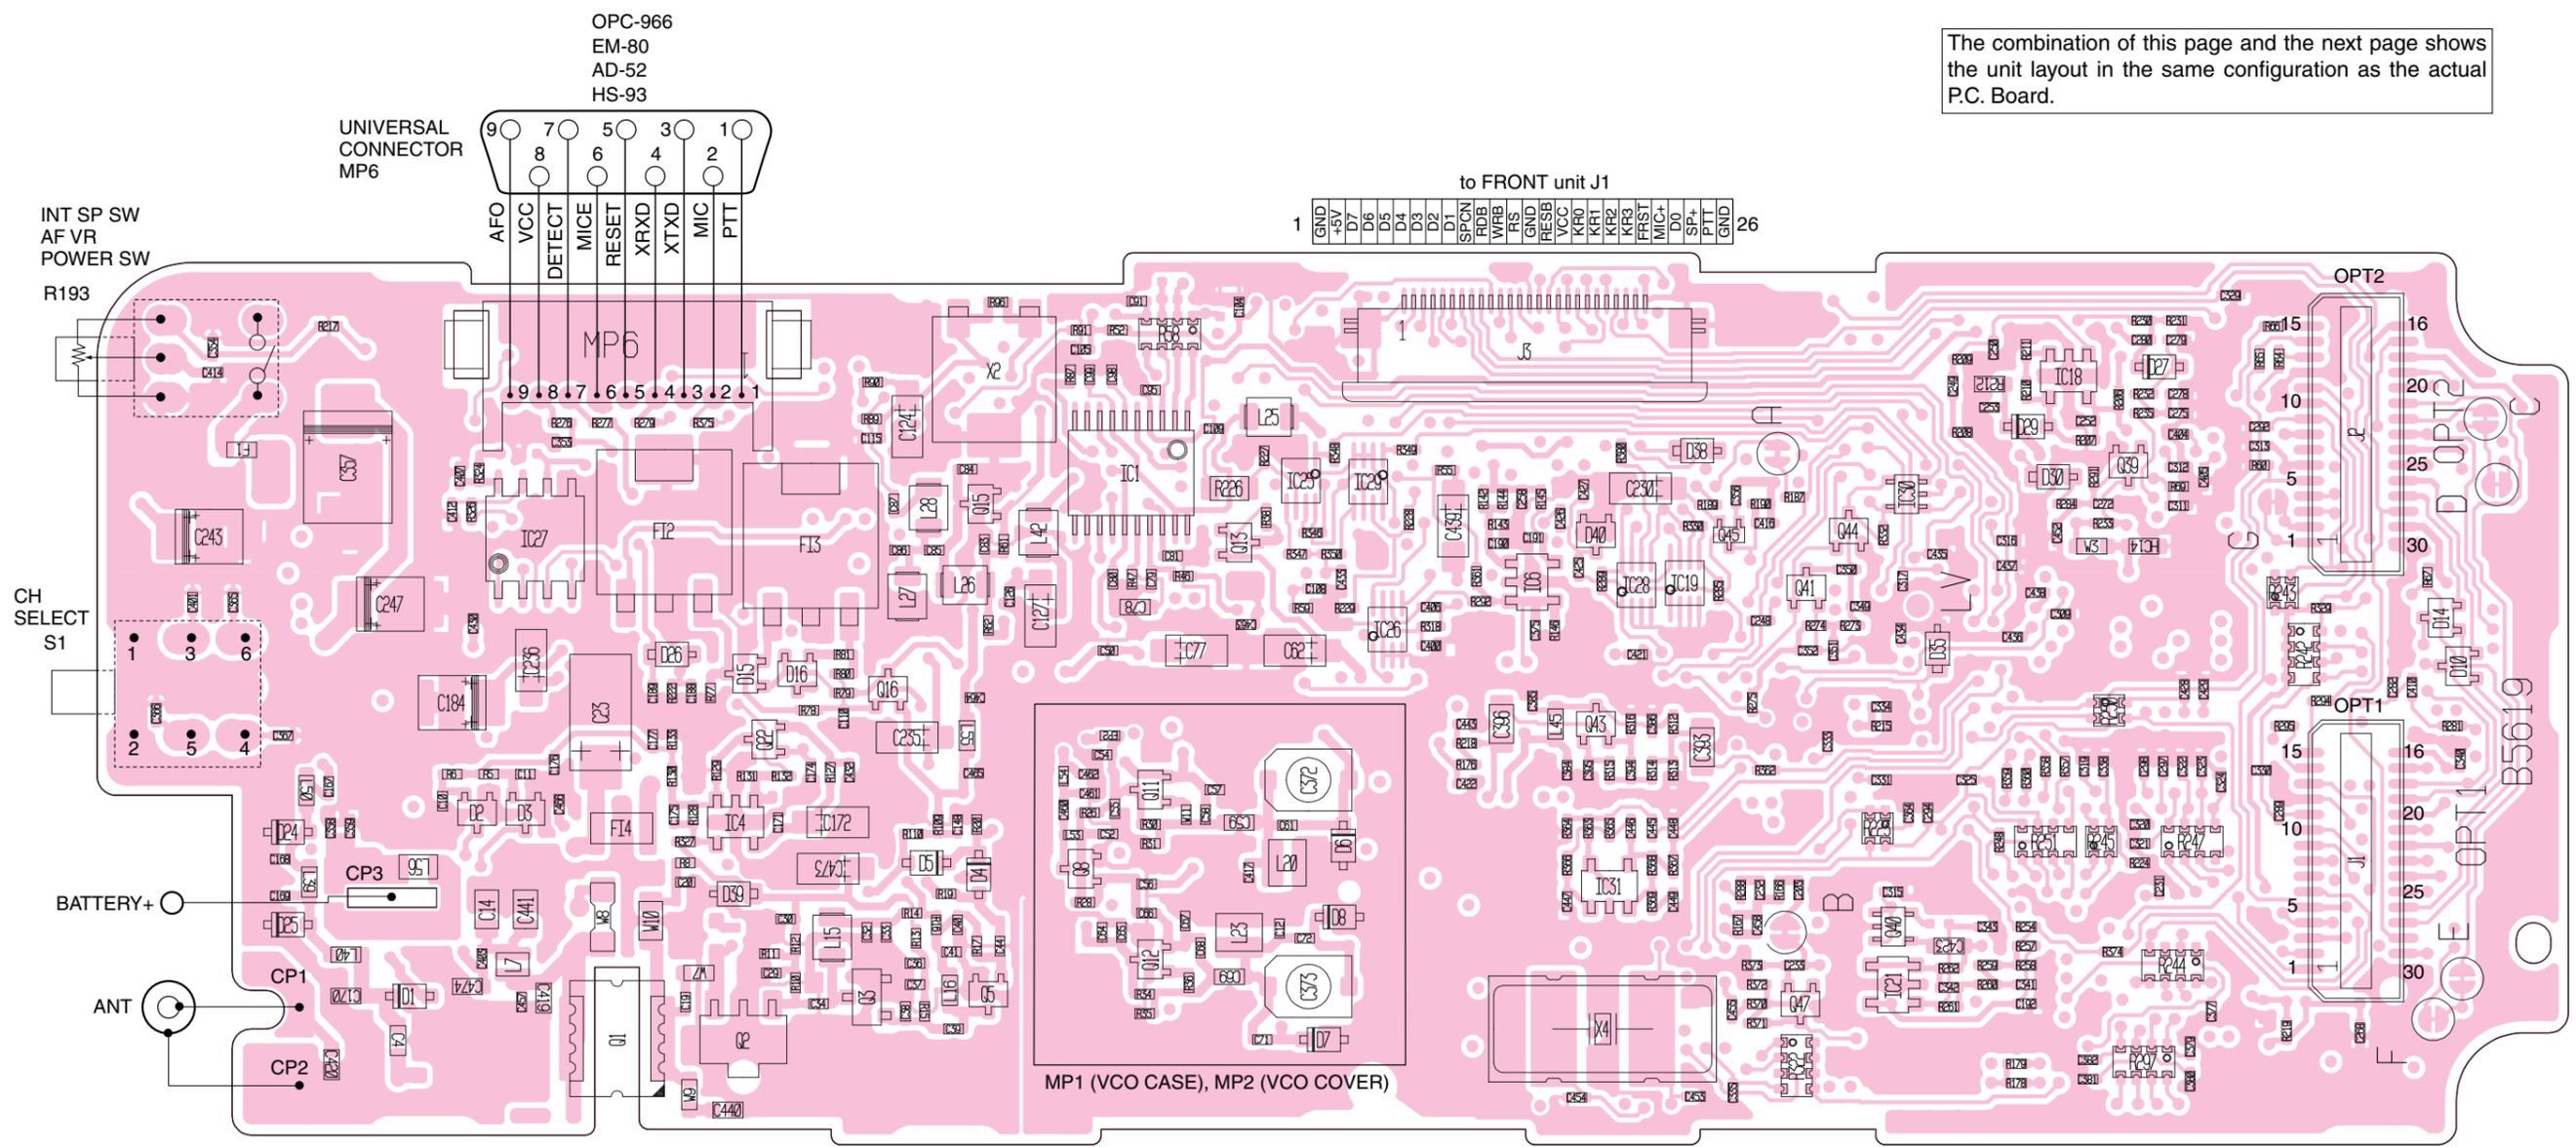

The combination of this page and the next page shows the unit layout in the same configuration as the actual P.C. Board.

F41G (MAIN unit)
• BOTTOM VIEW

The combination of this page and the previous page shows the unit layout in the same configuration as the actual P.C. Board.

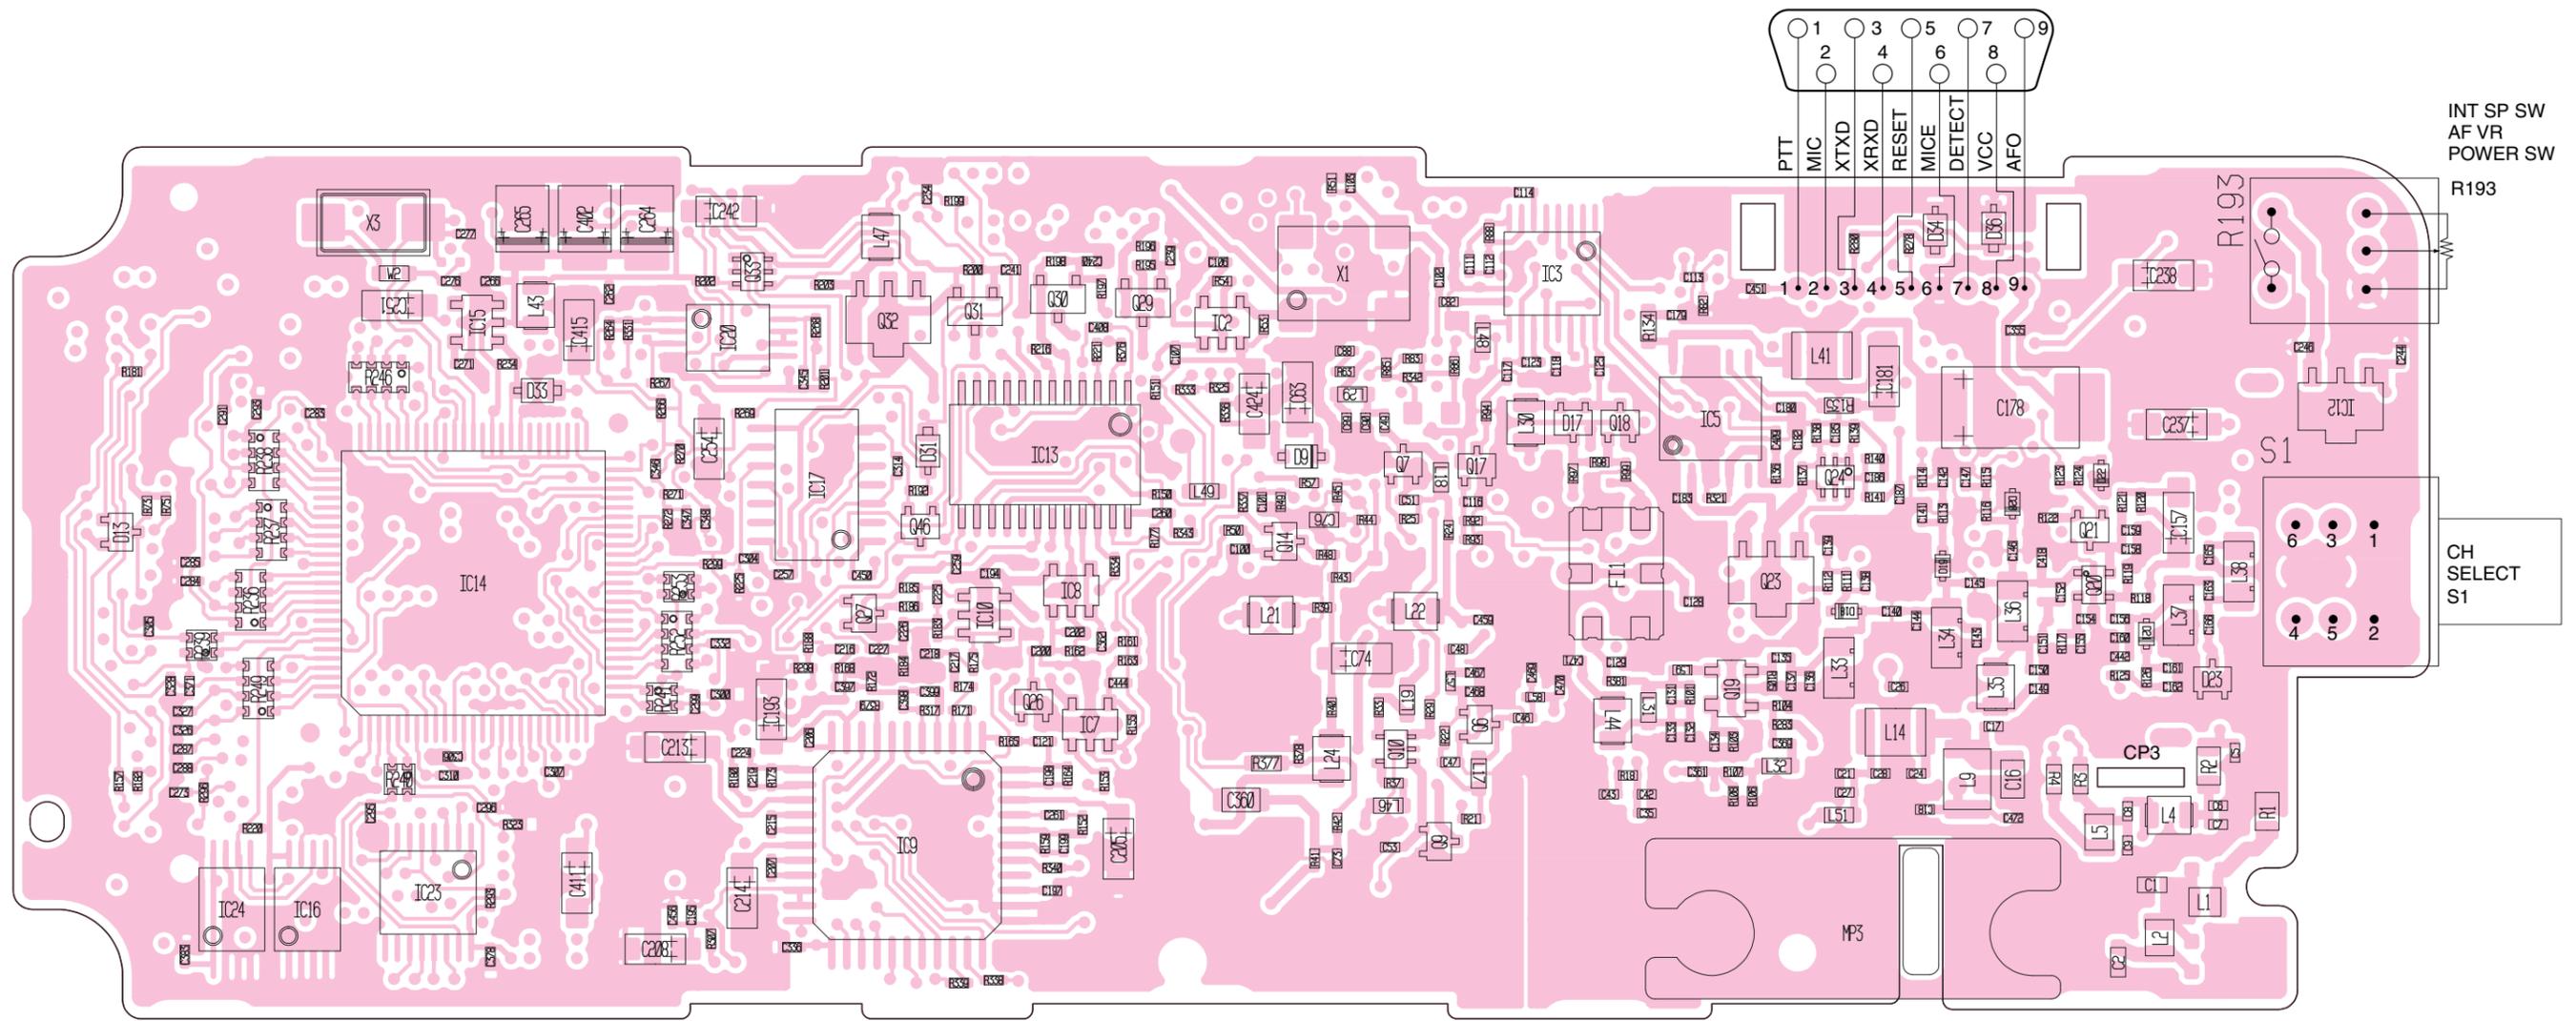

SECTION 10 BC-137 OPTIONAL DESKTOP CHARGER INFORMASION


10-1 PARTS LIST

[MAIN UNIT]

REF. NO.	ODER NO.	DESCRIPTION	QTY.
Q1	1520000650	S.TRANSISTOR 2SB1201-S-TL	1
Q2	1590000480	S.TRANSISTOR RN2402 (TE85R)	1
Q3	1590000510	S.TRANSISTOR RN1409 (TE85R)	1
Q4	1530001950	S.TRANSISTOR 2SC2712-GR (TE85R)	1
D1	1750000550	S.DIODE 1SS355 TE-17	1
D2	1750000020	S.DIODE 1SS184 (TE85R)	1
D3	1790000950	S.ZENER MA8056-M (TX)	1
R1	7030010000	S.RESISTOR MCR10EZHf 24R0 Ω (240)	1
R2	7030010000	S.RESISTOR MCR10EZHf 24R0 Ω (240)	1
R3	7030000190	S.RESISTOR MCR10EZHJ 27 Ω (270)	1
R4	7030000500	S.RESISTOR MCR10EZHJ 10 kΩ	1
R5	7030000500	S.RESISTOR MCR10EZHJ 10 kΩ	1
R6	7030000190	S.RESISTOR MCR10EZHJ 27 Ω (270)	1
R7	7030001740	S.RESISTOR MCR10EZHJ 2 kΩ	1
R8	7030001740	S.RESISTOR MCR10EZHJ 2 kΩ	1
R9	7030000590	S.RESISTOR MCR10EZHJ 56 kΩ	1
R10	7030000500	S.RESISTOR MCR10EZHJ 10 kΩ	1
R11	7030000380	S.RESISTOR MCR10EZHJ 1 kΩ	1
C1	4030001150	S.CERAMIC GRM40 F 104Z 25PT	1
C2	4030001150	S.CERAMIC GRM40 F 104Z 25PT	1
C3	4030001150	S.CERAMIC GRM40 F 104Z 25PT	1
C4	4030001150	S.CERAMIC GRM40 F 104Z 25PT	1
J1	6510021470	CONNECTOR HEC0470-01-230	1
J2	6510021470	CONNECTOR HEC0470-01-230	1
DS1	5040001390	LED TLG124A	1
W1	7030003970	S.JUMPER MCR18EZHJ JPW (000)	1
EP1	0910052602	PCB B 5493B	1
EP2	6910012240	SPACER TLE60-05	1
MP1	8930051340	2338 TERMINAL	3

S.=Surface mount

10-2 DISASSEMBLY INFORMATION

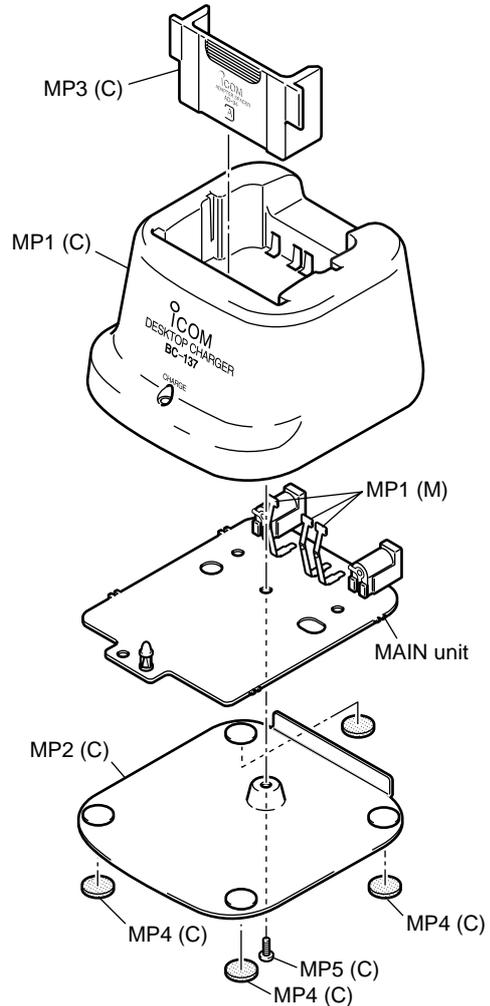

NOTE: (C) : CHASSIS
(M) : MAIN UNIT

[CHASSIS UNIT]


REF. NO.	ODER NO.	DESCRIPTION	QTY.
MP1	8010018030	2338 case	1
MP2	8110007080	2338 cover	1
MP3	8930050920	2327 spacer	1
MP4	8930039620	Leg cushion (A)	4
MP5	8810008660	Screw BT M3 x 8 NI-ZU	1

Screw abbreviations BT : Self-tapping
NI : Nickel


CONVENIENT:

BC-137 is connectable max. 6 pieces in parallel.
When connect BC-137 in parallel, JIG cable (as shown below) is required.


• CONNECTION

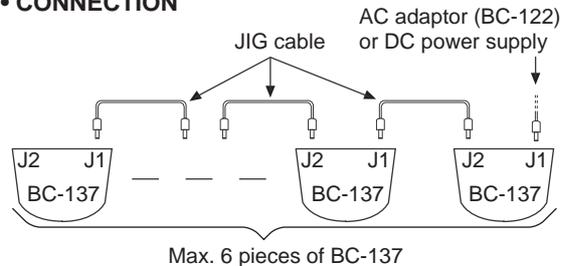


• JIG CABLE

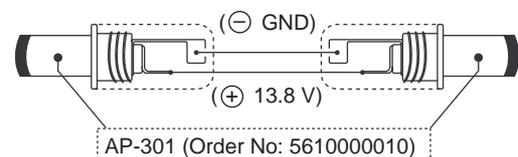


10-3 VOLTAGE DIAGRAM

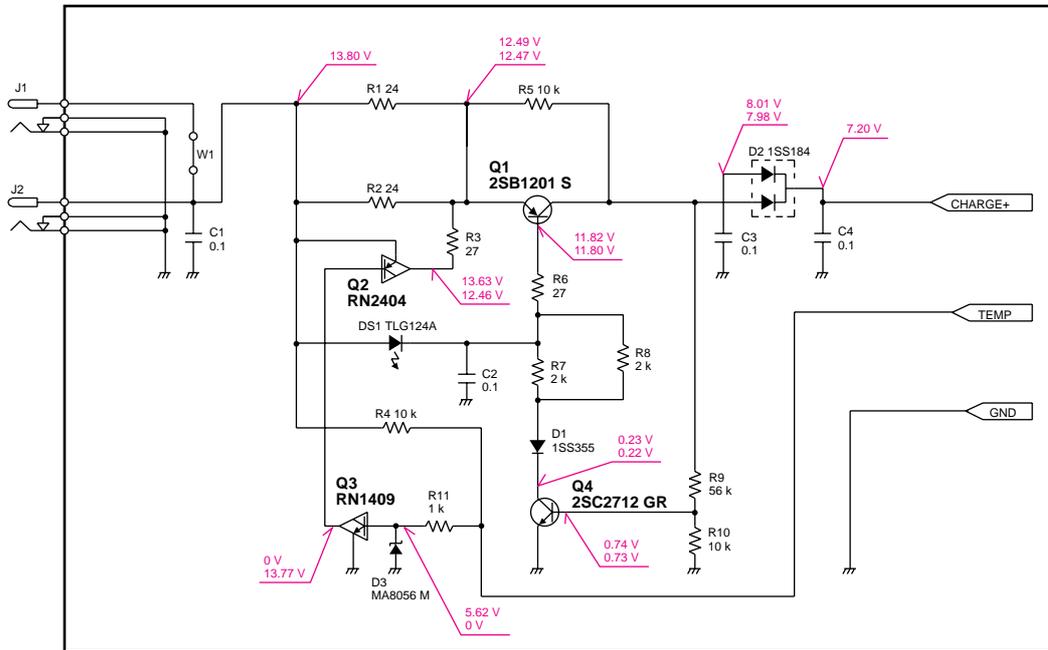



10-4 BOARD LAYOUT

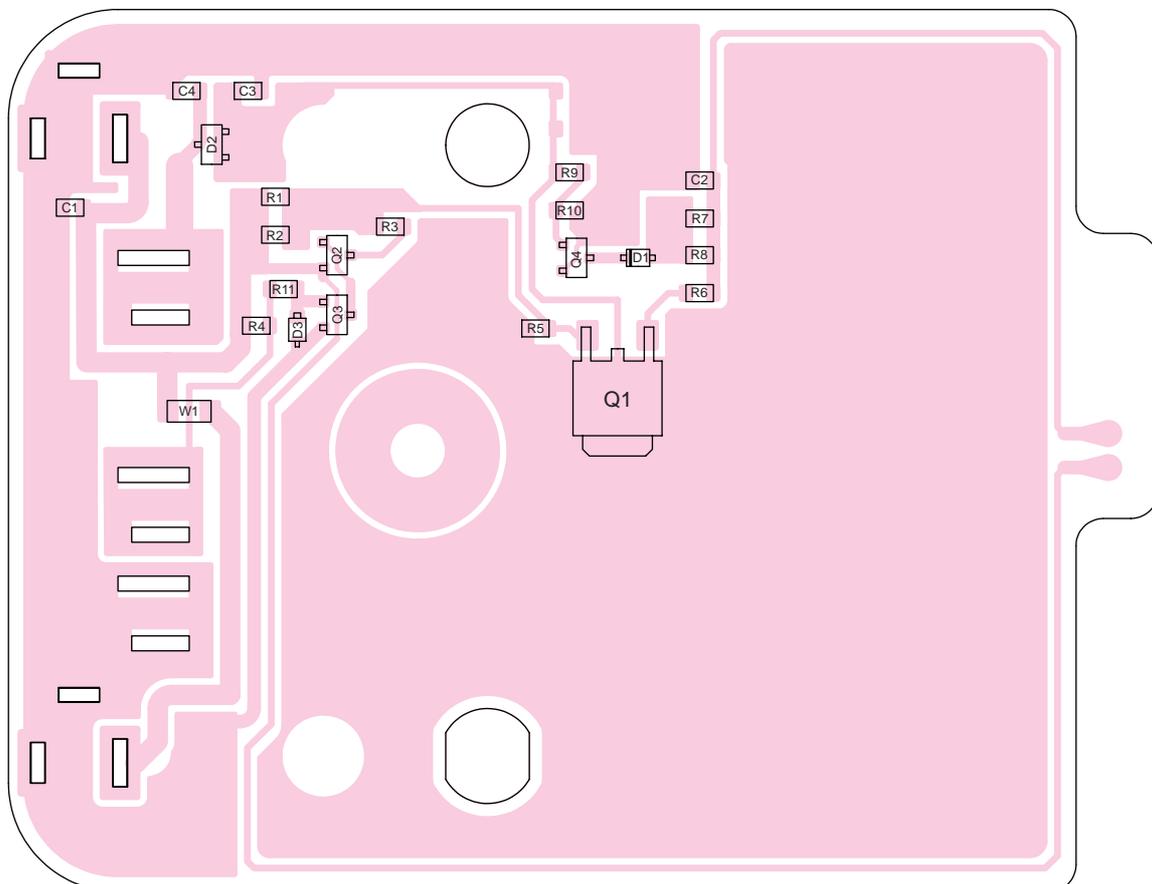


SECTION 11 BLOCK DIAGRAM

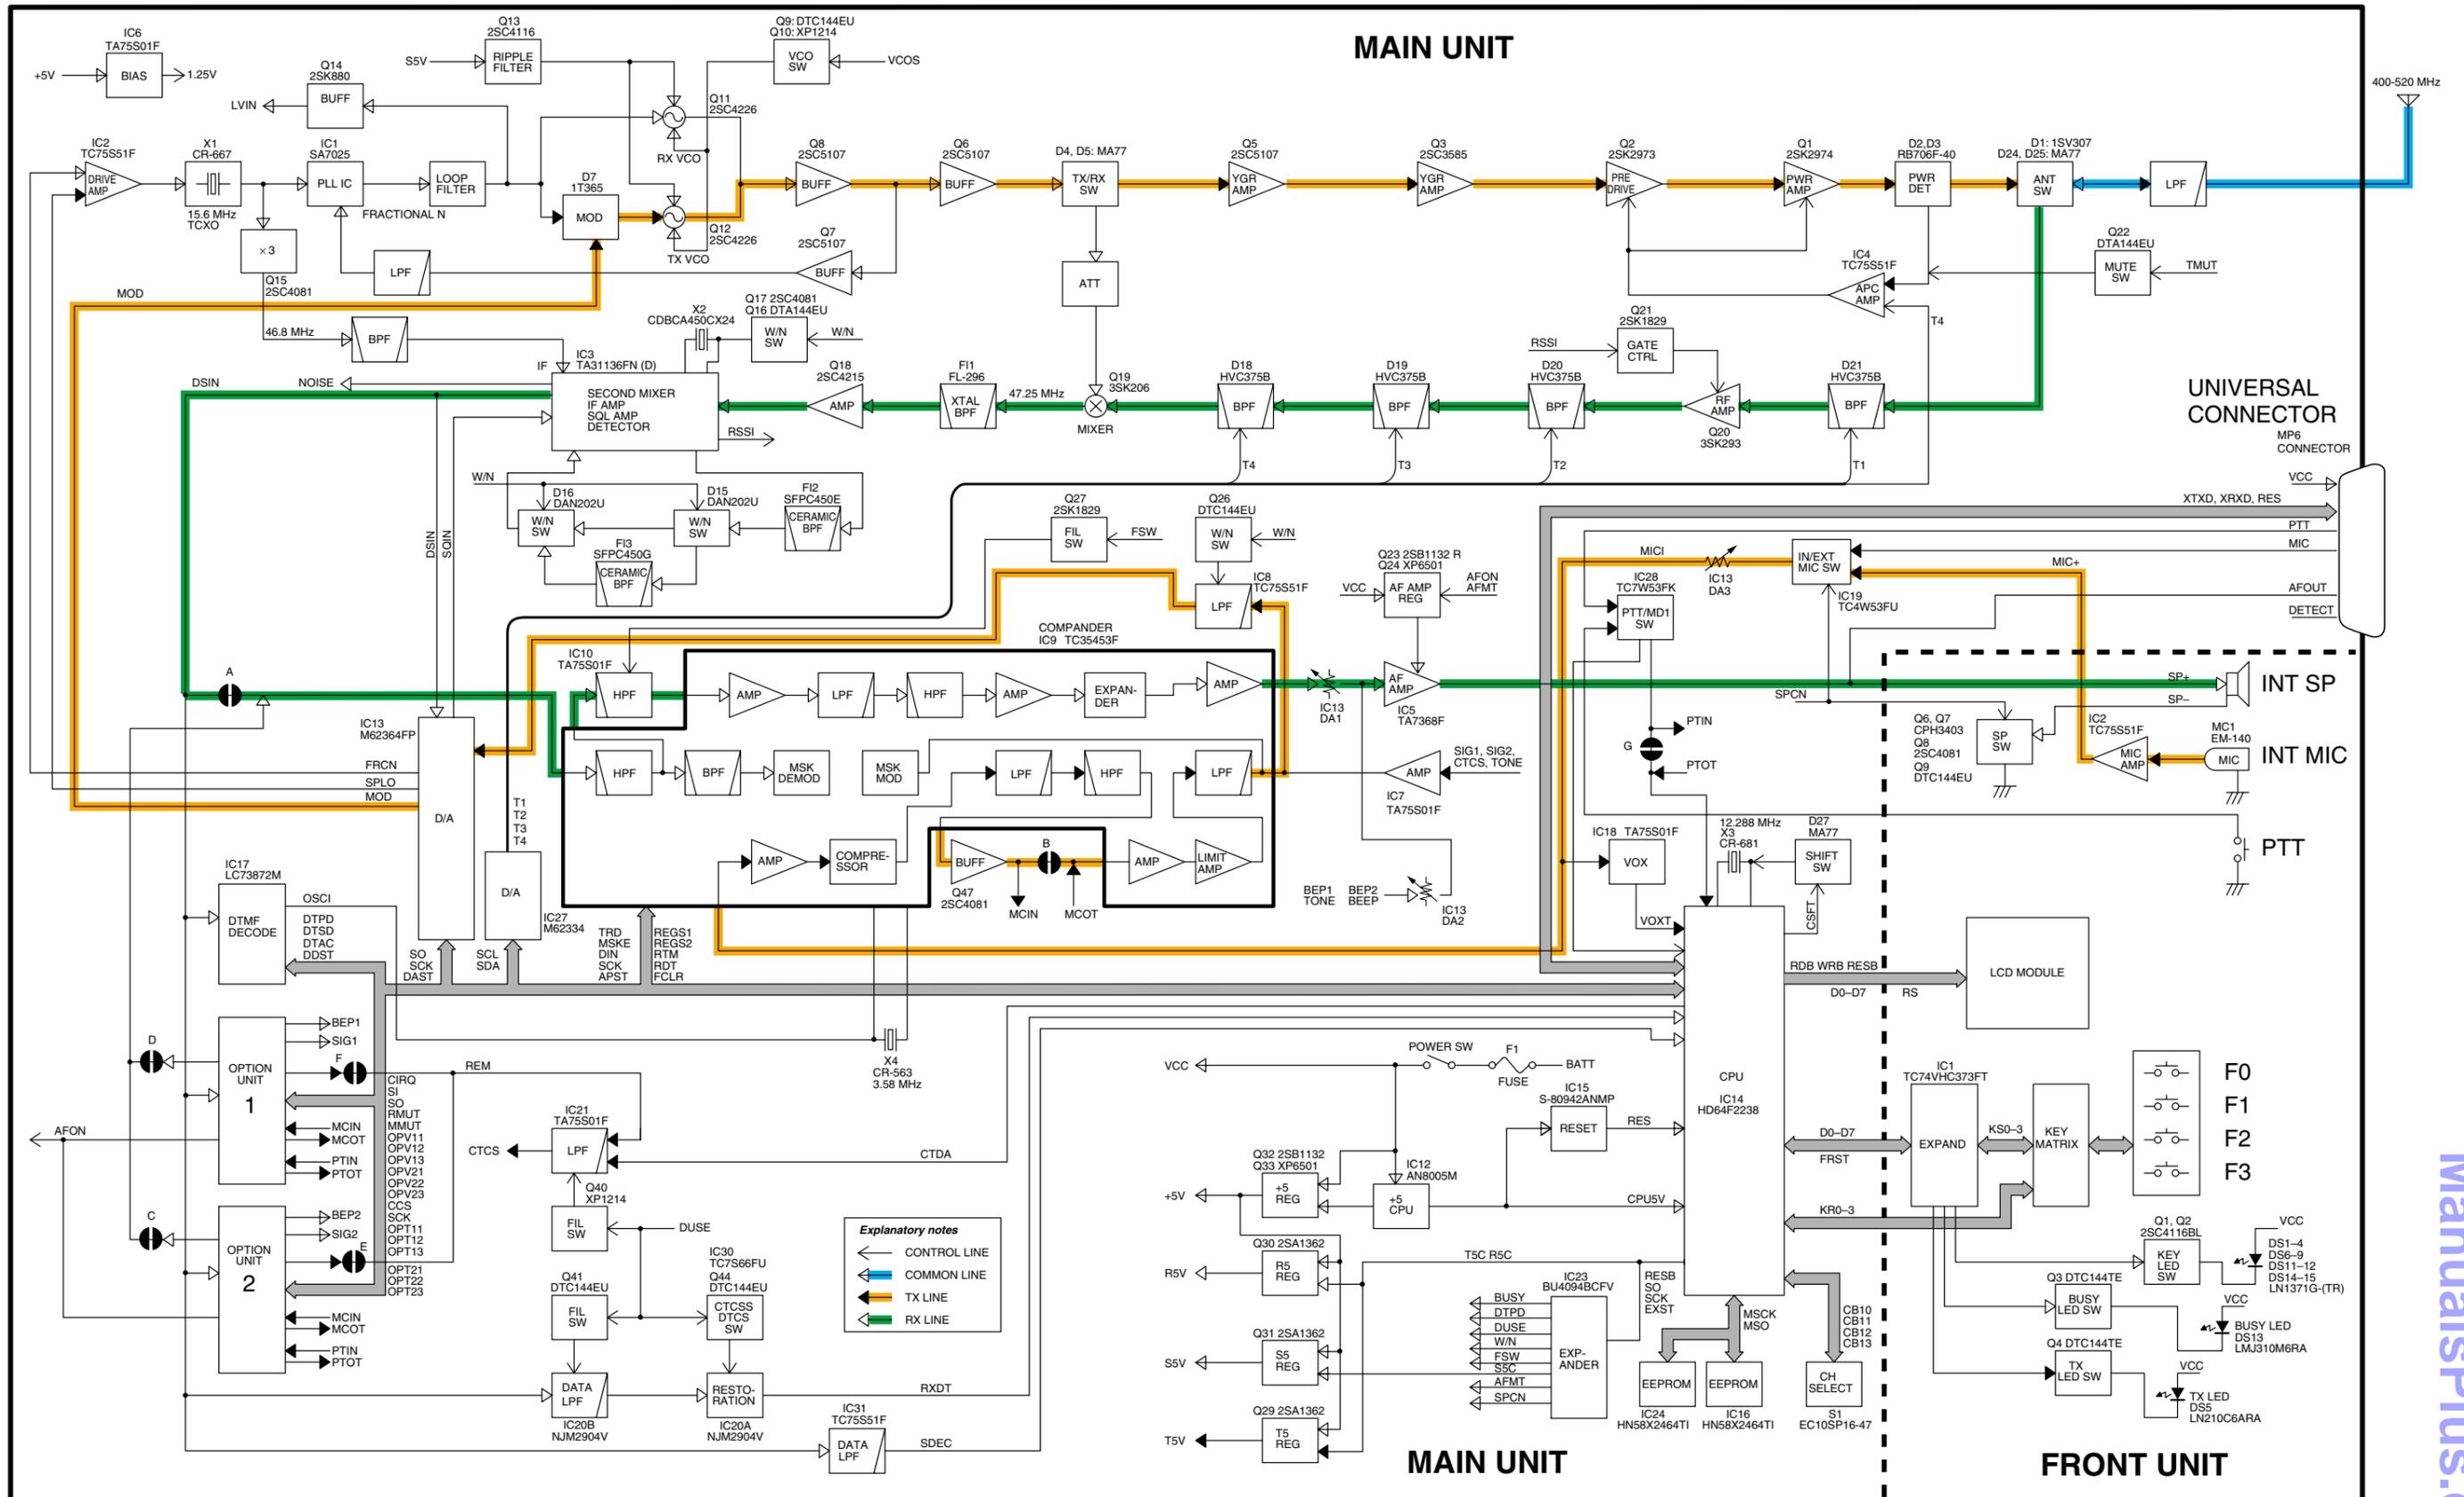

SECTION 12 VOLTAGE DIAGRAM

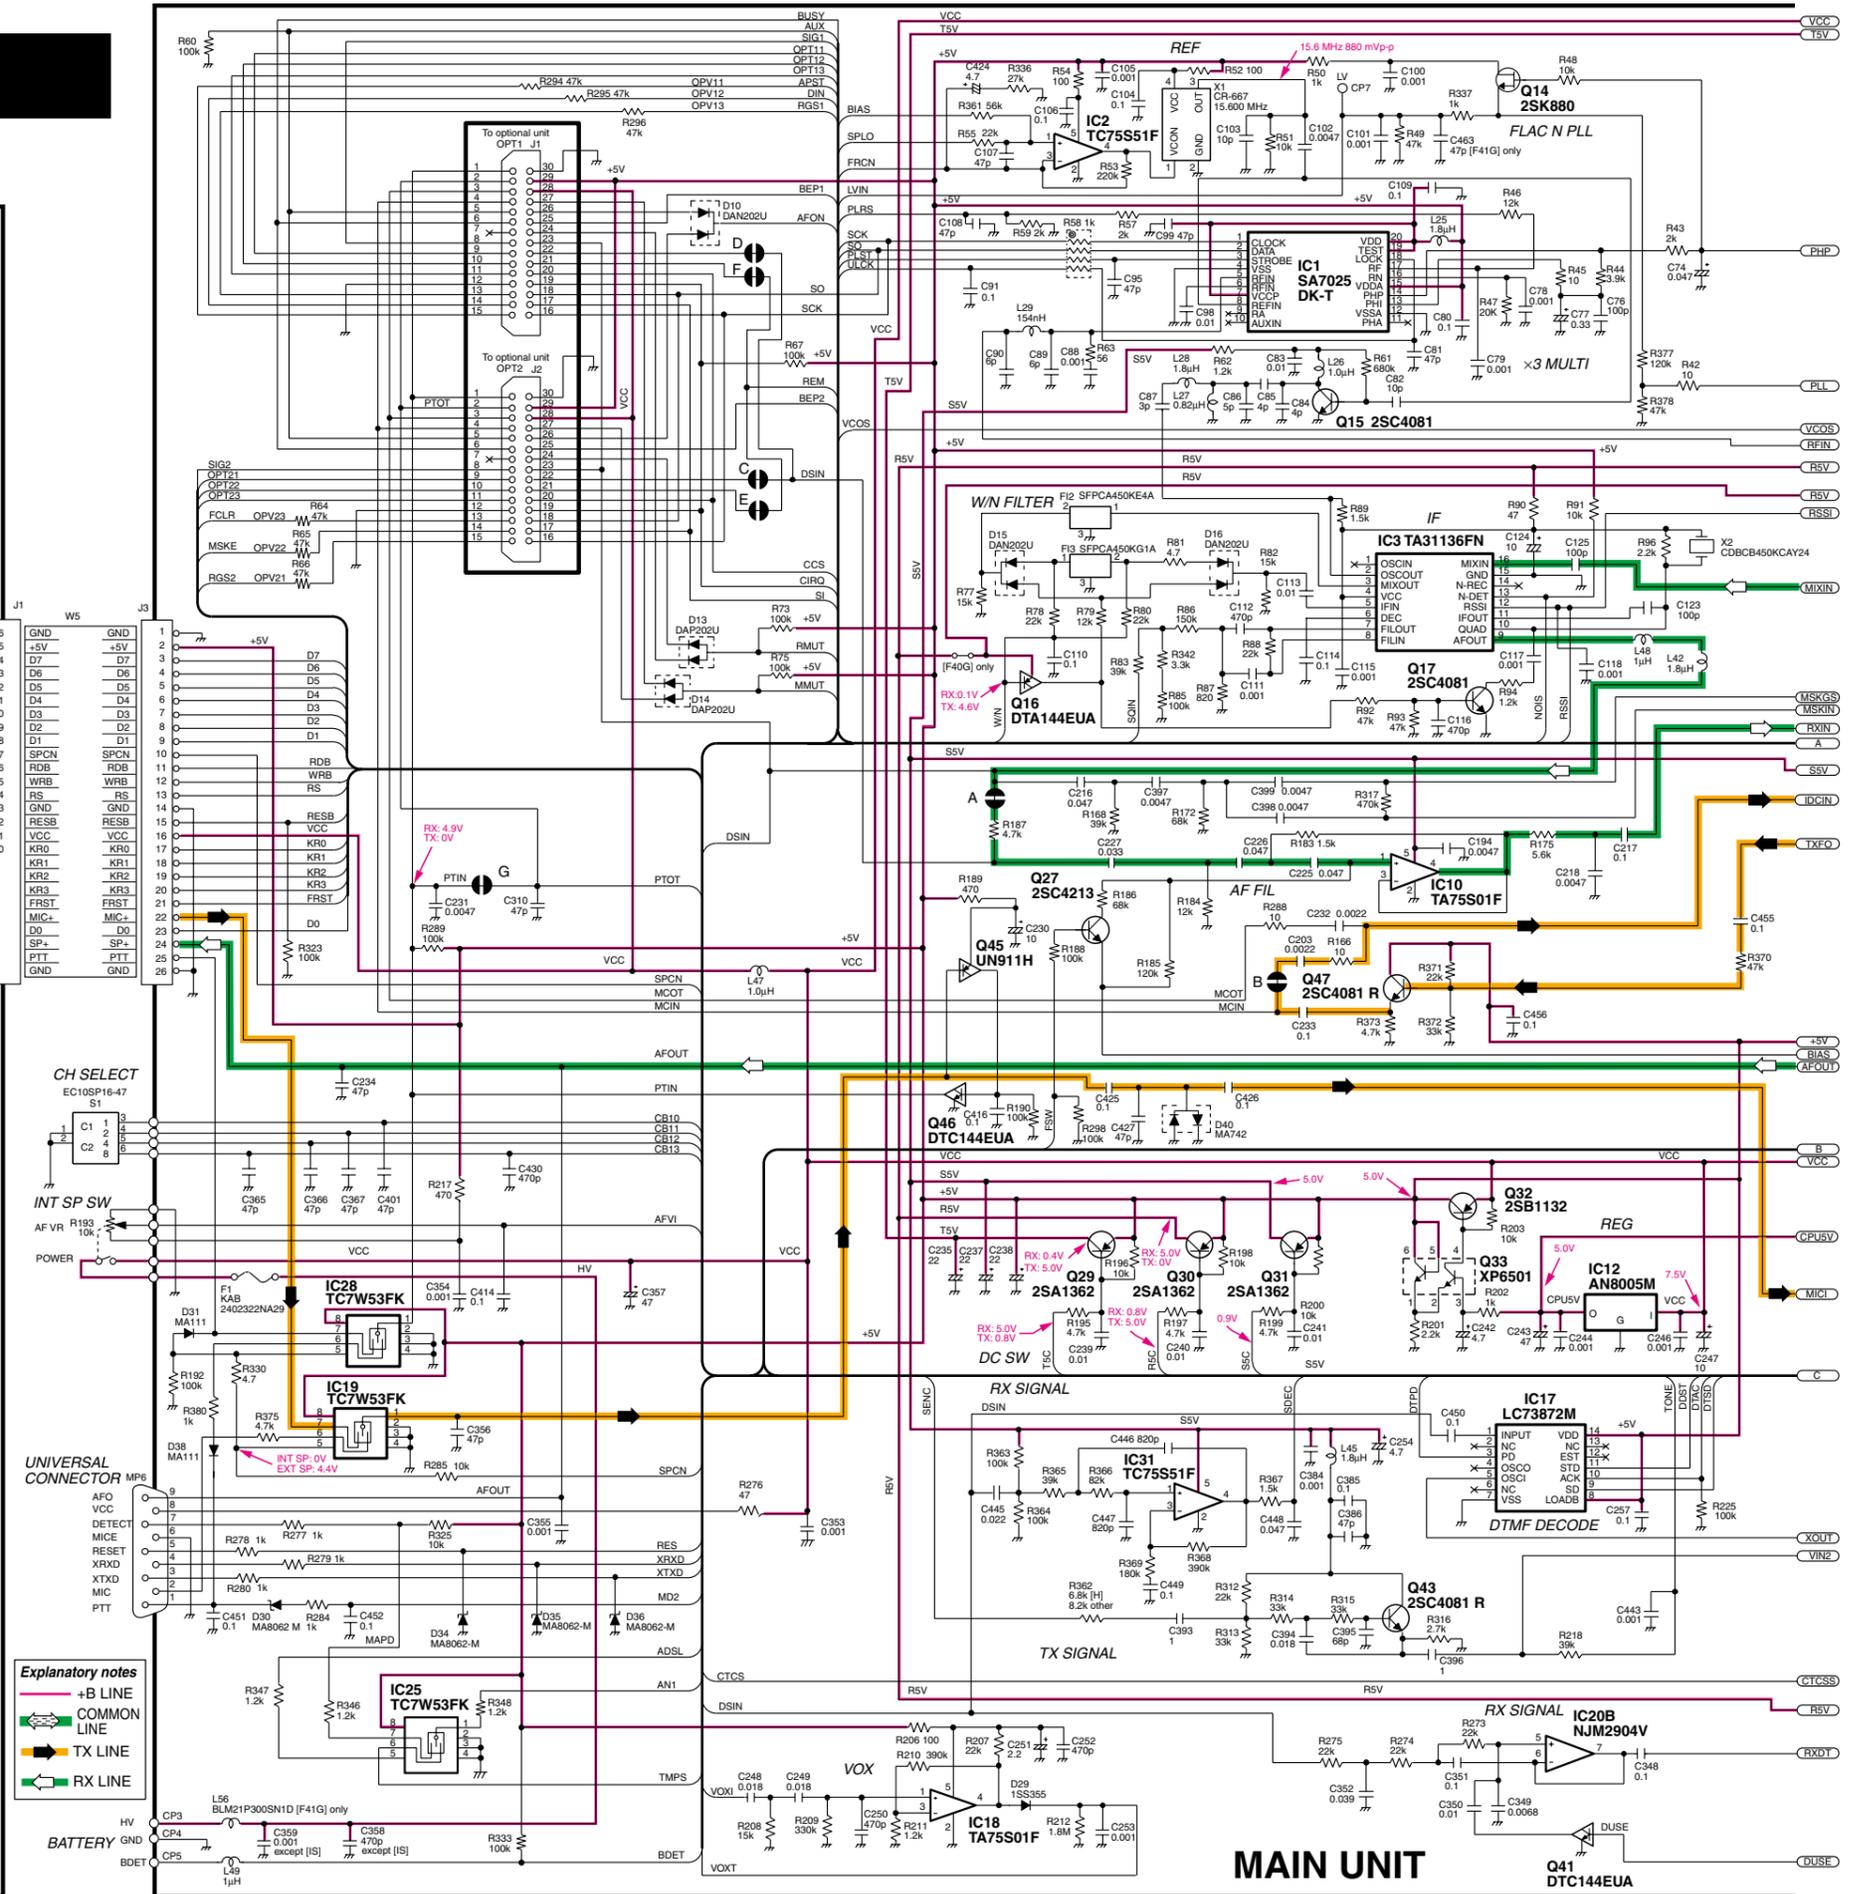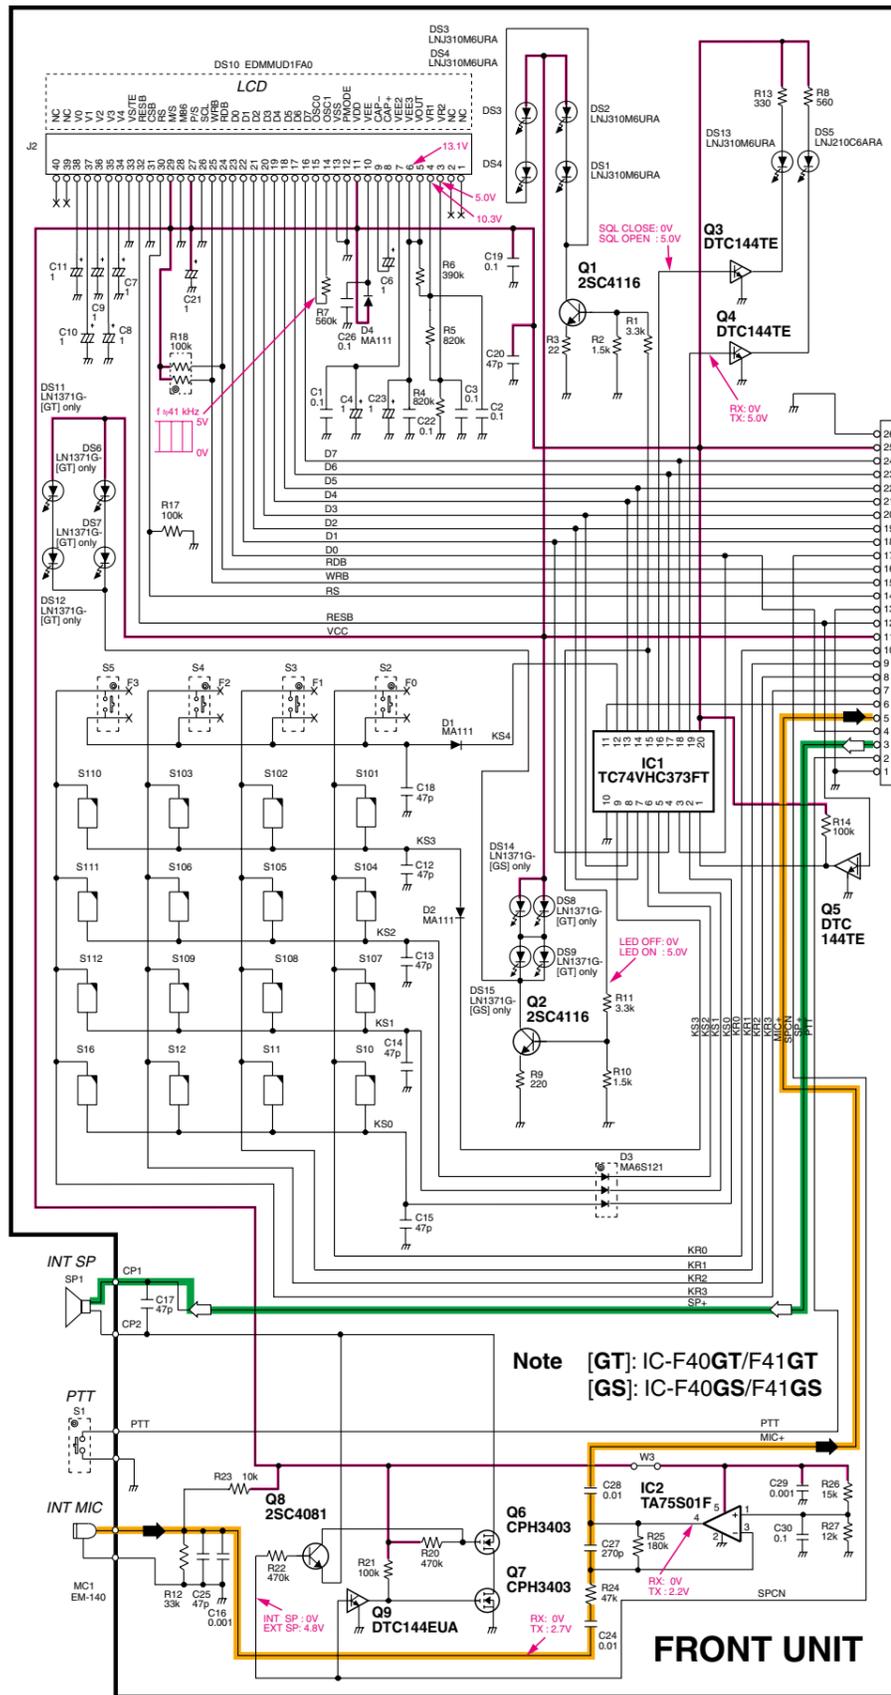

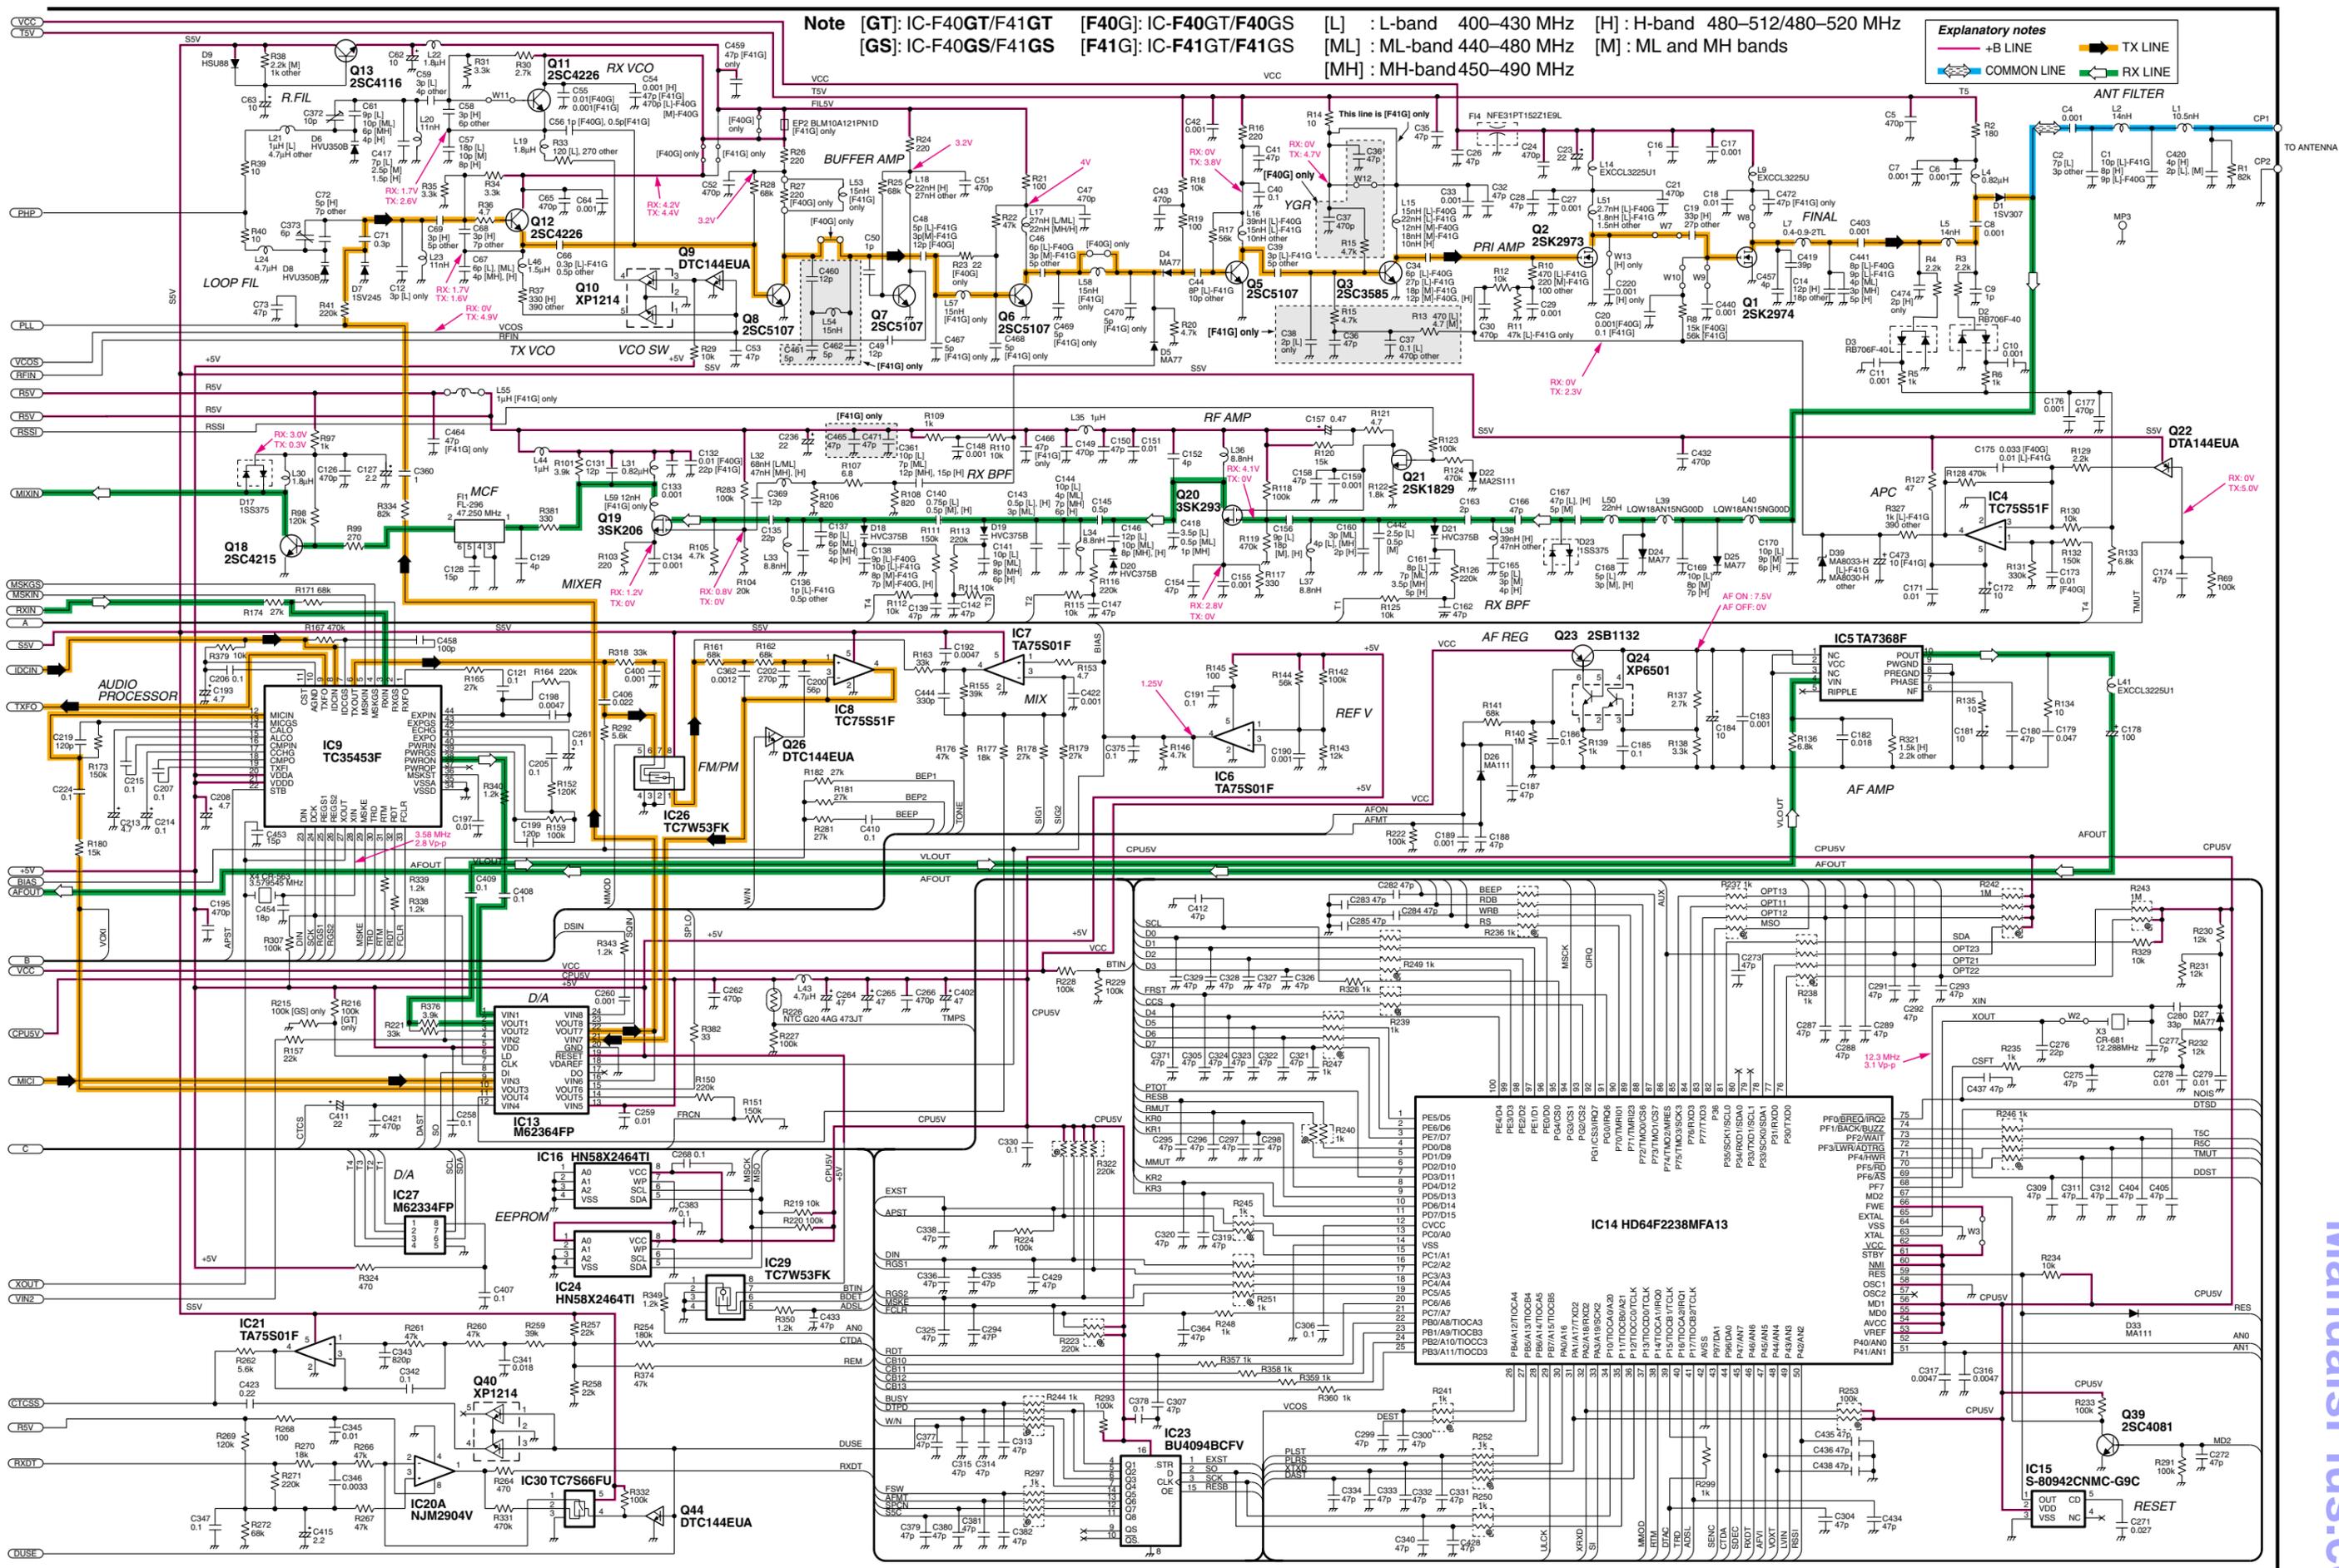

Note [GT]: IC-F40GT/F41GT [F40G]: IC-F40GT/F40GS [L] : L-band 400-430 MHz [H] : H-band 480-512/480-520 MHz
 [GS]: IC-F40GS/F41GS [F41G]: IC-F41GT/F41GS [ML] : ML-band 440-480 MHz [M] : ML and MH bands
 [MH] : MH-band 450-490 MHz

Explanatory notes
 +B LINE TX LINE
 COMMON LINE RX LINE

Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan
 Phone : +81 (06) 6793 5302
 Fax : +81 (06) 6793 0013
 URL : <http://www.icom.co.jp/world/index.html>

Icom America Inc.

<Corporate Headquarters>
 2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
 Phone : +1 (425) 454-8155 Fax : +1 (425) 454-1509
 URL : <http://www.icomamerica.com>
 E-mail : sales@icomamerica.com
 <Customer Service>
 Phone : +1 (425) 454-7619

Icom Canada

Glenwood Centre #150-6165
 Highway 17 Delta, B.C., V4K 5B8, Canada
 Phone : +1 (604) 952-4266 Fax : +1 (604) 952-0090
 URL : <http://www.icomcanada.com>
 E-mail : info@icomcanada.com

Icom (Australia) Pty. Ltd.

A.B.N. 88 006 092 575
 290-294 Albert Street, Brunswick, Victoria, 3056, Australia
 Phone : +61 (03) 9387-0666 Fax : +61 (03) 9387-0022
 URL : <http://www.icom.net.au>
 E-mail : sales@icom.net.au

Icom New Zealand

146A Harris Road, East Tamaki,
 Auckland, New Zealand
 Phone : +64 (09) 274 4062 Fax : +64 (09) 274 4708
 URL : <http://www.icom.co.nz>
 E-mail : inquiries@icom.co.nz

Beijing Icom Ltd.

1305, Wanshang Plaza, Shijingshan Road, Beijing China
 Phone : +86 (010) 6866 6337 Fax : +86 (010) 6866 3553
 URL : <http://www.bjicom.com>
 E-mail : bjicom@bjicom.com

Icom (Europe) GmbH

Communication Equipment
 Himmelgeister Str. 100, D-40225 Düsseldorf, Germany
 Phone : +49 (0211) 346047 Fax : +49 (0211) 333639
 URL : <http://www.icomeurope.com>
 E-mail : info@icomeurope.com

Icom Spain S.L

Crta. de Gracia a Manresa Km. 14.750
 08190 Sant Cugat del Valles Barcelona, SPAIN
 Phone : +34 (93) 590 26 70 Fax : +34 (93) 589 04 46
 URL : <http://www.icomspain.com>
 E-mail : icom@icomspain.com

Icom (UK) Ltd.

Unit 9, Sea St., Heme Bay, Kent, CT6 8LD, U.K.
 Phone : +44 (01227) 741741 Fax : +44 (01227) 741742
 URL : <http://www.icomuk.co.uk>
 E-mail : info@icomuk.co.uk

Icom France S.a

Zac de la Plaine, 1, Rue Brindejonc des Moulinais
 BP 5804, 31505 Toulouse Cedex, France
 Phone : +33 (5) 61 36 03 03 Fax : +33 (5) 61 36 03 00
 URL : <http://www.icom-france.com>
 E-mail : icom@icom-france.com

Asia Icom Inc.

6F No.68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.
 Phone : +886 (02) 2559 1899 Fax : +886 (02) 2559 1874
 URL : <http://www.asia-icom.com>
 E-mail : sales@asia-icom.com

Icom Polska

Sopot, 3 Maja 54 Poland
 Phone : +48 (58) 550 7135 Fax : +48 (58) 551 0484
 E-mail : icompolaska@icompolaska.com.pl

Count on us!

Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan

S-13803MZ-C1-②
© 2001-2003 Icom Inc.