



SPECIFICATIONS

- Speaker unit

Output level	83dB
Rated input Power	0.5W
Max. input Power	1W
Impedance	8Ω
- Microphone unit

Type of element	Electret-condenser	
Sensitivity		-58dB
Impedance		2kΩ

OPERATION

1. Connect the SMC-34 to the MIC-SP jack of the transceiver.
2. Set the Volume control of the SMC-34 to maximum position.
3. Adjust the Volume control of the transceiver and then adjust the SMC-34 Volume control.

If you want to operate the programmable function(function keys), refer to the instruction manual provided with the transceiver.


(Section: Programming the Remote Control Speaker microphone)

Diagram illustrating the exploded view of a portable electronic device, showing the following components and their assembly order:


- Clip
- Flat Spring
- Rivet
- Washer
- Clip Base
- Spring Pin
- Case (REAR)
- O Ring
- Spring
- Jumper Cable
- Switch Cover
- Wire (YELLOW)
- Switch Unit
- Potention M. (VR1)
- Chip Condenser
- Mic Element
- Packing
- Screen
- Spacer
- Case (FRONT)
- O Ring
- Washer
- Nob (VOLUME)
- Washer
- Tapping Screw
- Knob (PTT)
- Packing
- Knob (Lock Switch)
- Wire (RED)
- Wire (BLUE)
- Tapping Screw
- Cord With Plug
- Wire (BLACK)
- Main Unit
- Packing
- Speaker
- Screen

Technical drawing of a cable connector assembly. The drawing shows a side view of a cable with a braided shield and four insulated conductors (White, Black, Blue, Red) being terminated into a connector housing. Dimensions include a total length of 300±20, a shield diameter of 13.0±2, and a conductor bundle diameter of 10.0±2. The connector housing has a 1.0±0.2 hole for the shield and a 2.5±0.05 hole for the conductors. The conductors are labeled 1 (Blue), 2 (Red), 3 (Black), and 4 (White). A seal is shown at the end of the cable.

SCHEMATIC DIAGRAM

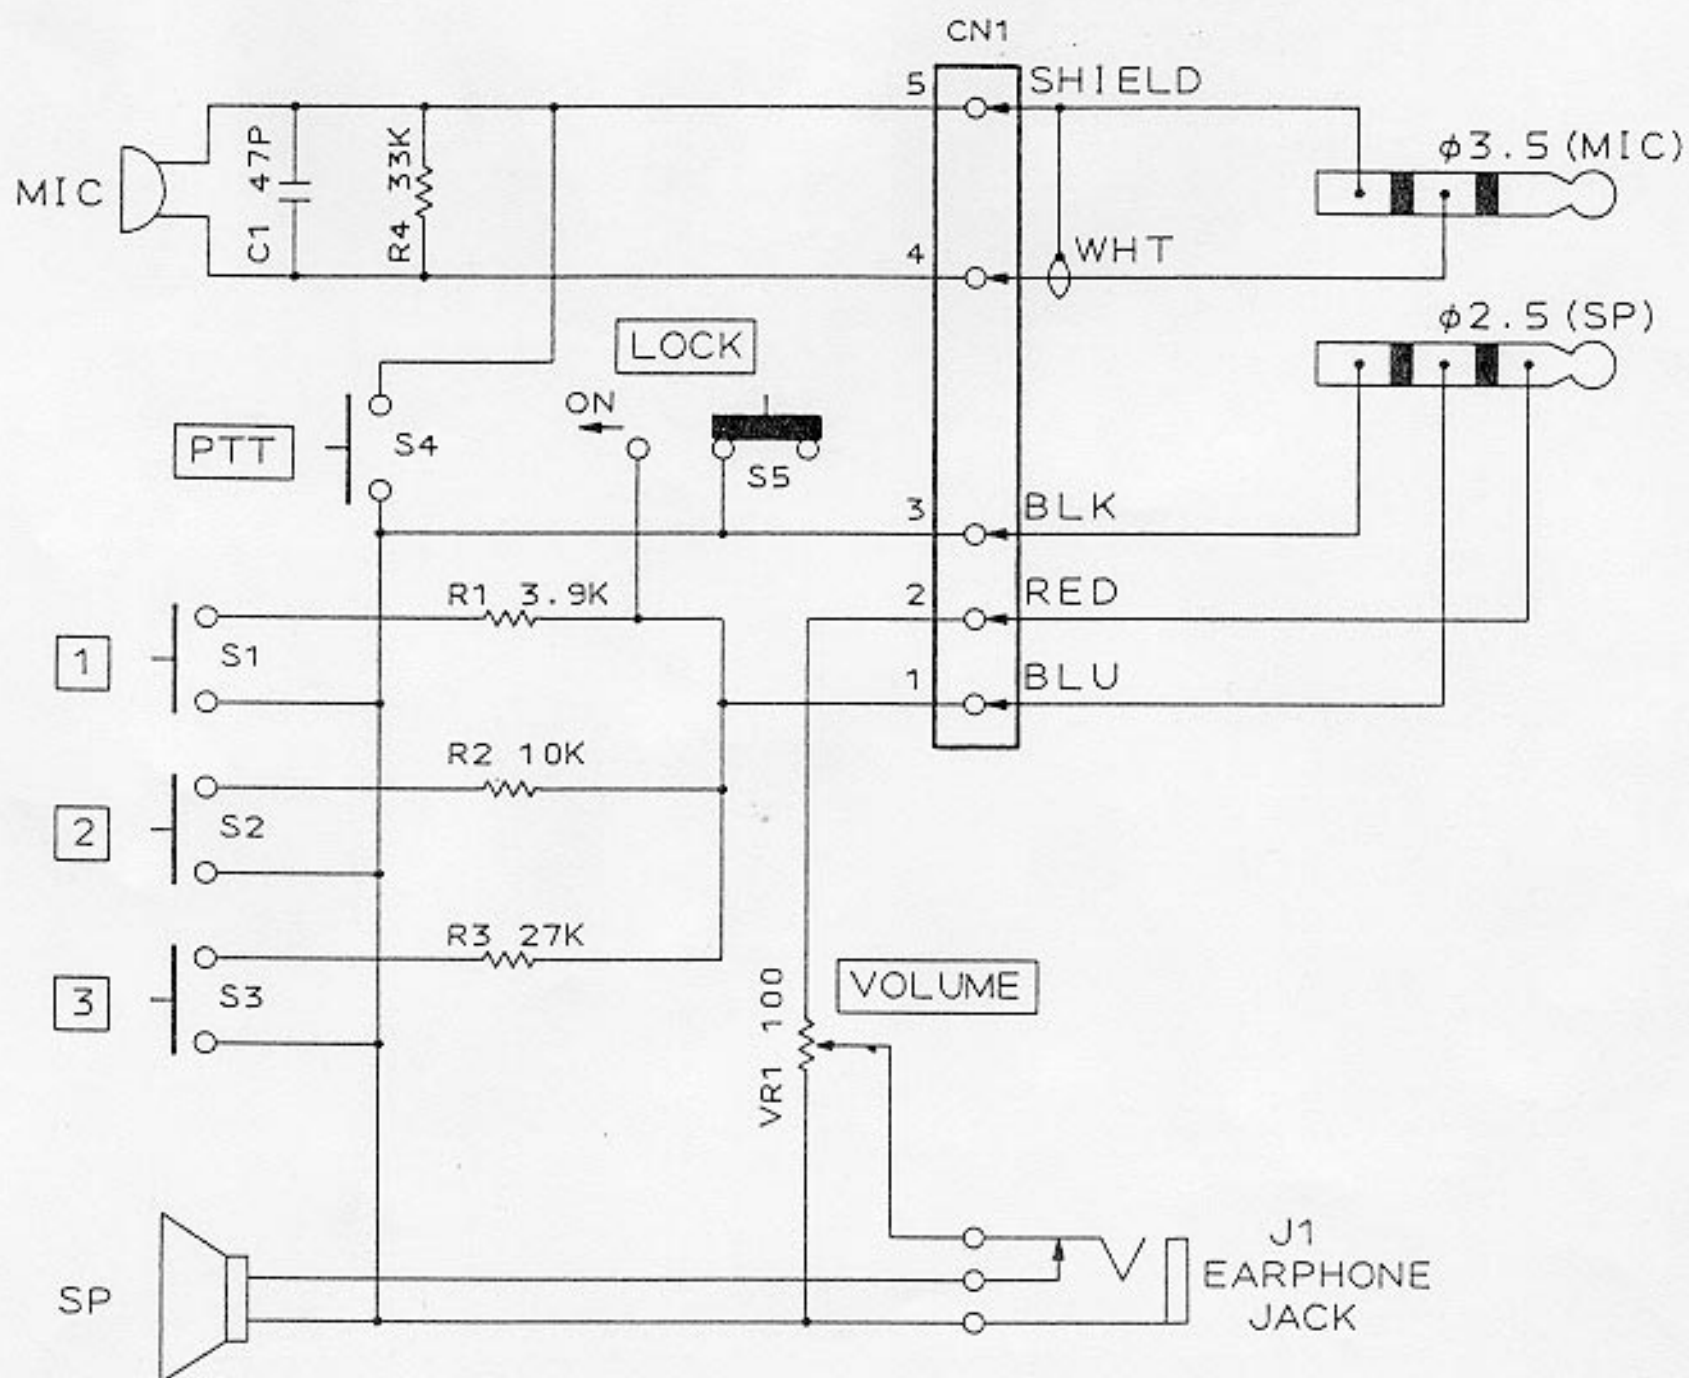

PC BOARD

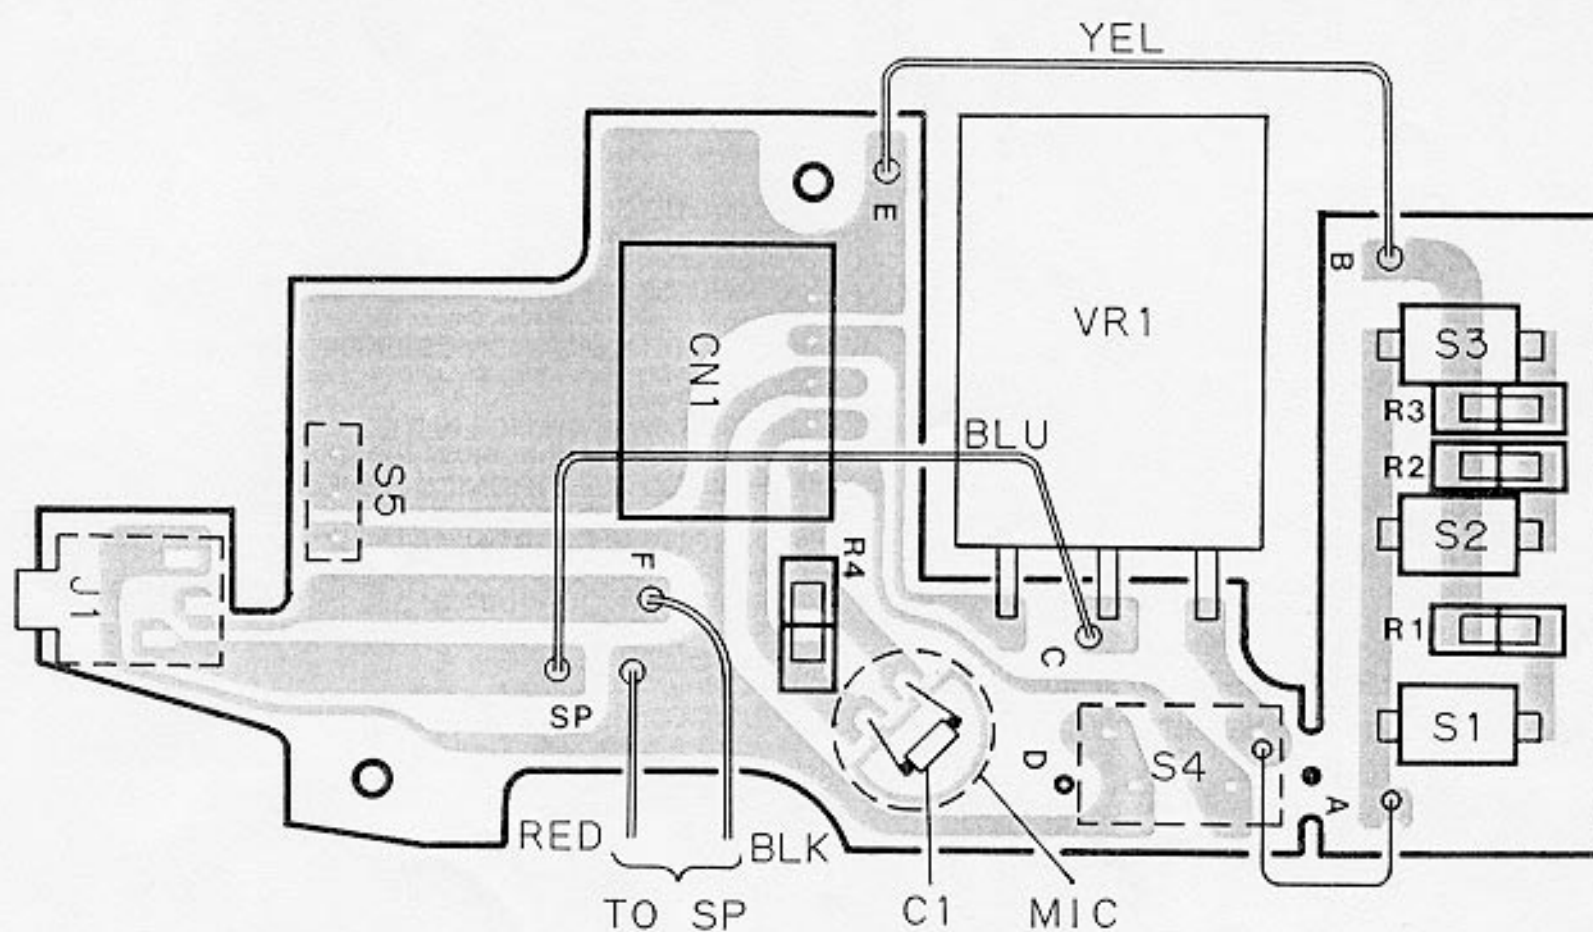

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
SMC-34						
J1		*	A02-1696-08	CASE(FRONT)		
		*	A02-1699-08	CASE ASSY(REAR)		
		*	E30-3136-08	CORD WITH PLUG		
		*	E11-0453-08	EARPHONE JACK(2.5 ϕ)		
			J29-0469-08	CLIP		
		*	K29-4822-08	SWITCH COVER(1,2,3)		
		*	K29-4823-08	KNØB (VOLUME)		
		*	K29-4824-08	KNØB (PTT)		
VR1		*	R05-0408-08	POTENTIØ M. 100 ØHM (B)		
S1 -3			S70-0408-05	TACT SWITCH(1,2,3)		
S4		*	S70-0421-08	TACT SWITCH(PTT)		
S5		*	S62-0431-08	SLIDE SWITCH(LOCK)		
		*	T07-0295-08	SPEAKER		
		*	T91-0530-08	MIC ELEMENT		
		*	W02-1743-08	UNIT ASSY		

L:Scandinavia

K:USA

P:Canada

△印は安全部品

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFES(Europe)

X:Australia

M:Other Areas

△ indicates safety critical components.

KENWOOD CORPORATION

Shionogi Shibuya Building, 17-5, 2-chome Shibuya, Shibuya-ku, Tokyo 150, Japan

KENWOOD U.S.A. CORPORATION

CONSUMER ELECTRONICS GROUP

P.O. BOX 22745, 2201 East Dominguez St., Long Beach, CA 90810, U.S.A.

KENWOOD ELECTRONICS CANADA INC.

6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD ELECTRONICS LATIN AMERICA S.A.

P.O. BOX 55-2791, Piso 6 Plaza Chase, Cl. 47 y Aquilino de la Guardia, Panama, Republic de Panama

TRIO-KENWOOD U.K. LIMITED

Kenwood House, Dwight Road, Watford, Herts, WD1 8EB, United Kingdom

KENWOOD ELECTRONICS BENELUX N.V.

Mechelsesteenweg 418 B-1930 Zaventem, Belgium

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Rembrücker Str. 15, 6056 Heusenstamm, Germany

TRIO-KENWOOD FRANCE S.A.

13 Boulevard Ney, 75018 Paris, France

KENWOOD LINEAR S.p.A.

20125, Milano-Via Arbe, 50, Italy

KENWOOD ESPAÑA S.A.

Bolívia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD. (A.C.N. 001 499 074)

P.O. BOX 504, 8 Figtree Drive, Australia Centre, Homebush, N.S.W. 2140, Australia

KENWOOD & LEE ELECTRONICS, LTD.

Unit 3712-3724, Level 37 Tower 1, Metroplaza, 223 Hing Fong Road,

Kwai Fong N.T. Hong Kong

KENWOOD ELECTRONICS SINGAPORE PTE LTD

No. 1 Genting Lane #07-00, Singapore, 1334