



FMC 1000 FM STEREO MODULATOR
(with Limiter and Compression)

Instruction Manual

WARNING: TO PREVENT FIRE OR ELECTRICAL SHOCK DO NOT EXPOSE TO RAIN OR MOISTURE

	CAUTION RISK OF ELECTRIC SHOCK DO NOT OPEN	
CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER NO USER-SERVICEABLE PARTS INSIDE REFER SERVICING TO QUALIFIED PERSONNEL		



A product and cart combination should be moved with care. Quick stops, excessive force and uneven surfaces may cause the product and cart combination to overturn.



The lightning flash with arrow head symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.

WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE.
DO NOT OPEN THE CABINET, REFER SERVICING TO QUALIFIED PERSONNEL ONLY.

CAUTION: TO PREVENT ELECTRIC SHOCK, DO NOT USE THIS (POLARIZED) PLUG WITH AN EXTENSION CORD RECEPTACLE OR OTHER OUTLET UNLESS THE BLADES CAN BE FULLY INSERTED TO PREVENT BLADE EXPOSURE.


ATTENTION: POUR PREVENIR LES CHOCS ELECTRIQUES, NE PAS UTILISER CETTE FICHE POLARISEE AVEC UN PROLONGATEUR, UNE PRISE DE COURANT OU UNE AUTRE SORTIE DE COURANT, SAUF SI LES LAMES PEUVENT ETRE INSEREES A FOND SANS EN LAISSER AUCUNE PARTIE A DECOUVERT.

- 1. Read Instructions**—All the safety and operating instructions should be read before the product is operated.
- 2. Retain Instructions**—The safety and operating instructions should be retained for future reference.
- 3. Heed Warnings**—All warnings on the product and in the operating instructions should be adhered to.
- 4. Follow Instructions**—All operating and use instructions should be followed.
- 5. Cleaning**—Unplug this product from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleansers. Use a damp cloth for cleaning.
- 6. Attachments**—Do not use attachments that are not recommended by the product manufacturer as they may cause hazards.
- 7. Water and Moisture**—Do not use this product near water—for example, near a bathtub, wash bowl, kitchen sink or laundry tub; in a wet basement; or near a swimming pool; and the like.
- 8. Accessories**—Do not place this product on an unstable cart, stand, tripod, bracket, or table. The product may fall, causing serious injury to a child or adult, and serious damage to the product. Use only with a cart, stand, tripod, bracket, or table recommended by the manufacturer, or sold with the product. Any mounting of the product should follow the manufacturer's instructions, and should use a mounting accessory recommended by the manufacturer.
- 9.** A product and cart combination should be moved with care. Quick stops, excessive force, and uneven surfaces may cause the product and cart combination to overturn.
- 10. Ventilation**—Slots and openings in the cabinet are provided for ventilation and to ensure reliable operation of the product and to protect it from overheating, and these openings must not be blocked or covered. The openings should never be blocked by placing the product on a bed, sofa, rug, or similar surface. This product should not be placed in a built-in installation such as bookcase or rack unless proper ventilation is provided or the manufacturer's instructions have been adhered to.
- 11. Power Sources**—This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supplied to your home, consult your product dealer or local power company. For products intended to operate from battery power, or other sources, refer to the operating instructions.
- 12. Grounding or Polarization**—This product may be equipped with a polarized alternating-current line plug (a plug having one blade wider than the other). This plug will fit into the power outlet only one way. This is a safety feature. If you are unable to insert the plug fully into the outlet, try reversing the plug. If the plug should still fail to fit, contact your electrician to replace your obsolete outlet. Do not defeat the safety purpose of the polarized plug. Alternate Warnings—If this product is equipped with a three-wire grounding-type plug, a plug having a third (grounding) pin, the plug will only fit into a grounding-type power outlet. This is a safety feature. If you are unable to insert the plug into the outlet, contact your electrician to replace your obsolete outlet. Do not defeat the safety purpose of the grounding-type plug.
- 12 a. Mise à la terre ou Polarisation**—Cet appareil est équipé avec un cordon d'alimentation à trois fils. Il est à brancher sur une prise ayant un connecteur à la terre. Assurez-vous que la connection à la terre ne manque pas.
- 13. Power-Cord Protection**—Power-supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to cords at plugs, convenience receptacles, and the point where they exit from the product.

- 14. Outdoor Antenna Grounding**—If an outside antenna or cable system is connected to the product, be sure the antenna or cable system is grounded so as to provide some protection against voltage surges and built-up static charges. Article 810 of the National Electrical Code, ANSI/NFPA 70, provides information with regard to proper grounding of the mast and supporting structure, grounding of the lead-in wire to an antenna discharge unit, size of grounding conductors, location of antenna-discharge unit, connection to grounding electrodes, and requirements for the grounding electrode. See Figure A.
- 15. Lightning**—For added protection for this product during a lightning storm, or when it is left unattended and unused for long periods of time, unplug it from the wall outlet and disconnect the antenna or cable system. This will prevent damage to the product due to lightning and power-line surges.
- 16. Power Lines**—An outside antenna system should not be located in the vicinity of overhead power lines, other electric light or power circuits, where it can fall into such power lines or circuits. When installing an outside antenna system, extreme care should be taken to keep from touching such power lines or circuits as contact with them may be fatal.
- 17. Overloading**—Do not overload wall outlets, extension cords, or integral convenience receptacles as this can result in a risk of fire or electric shock.
- 18. Object and Liquid Entry**—Never push objects of any kind into this product through openings as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock. Never spill liquid of any kind on the product.
- 19. Servicing**—Do not attempt to service this product yourself as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service personnel.
- 20. Damage Requiring Service**—Unplug this product from the wall outlet and refer servicing to qualified service personnel under the following conditions:
 - a. When the power-supply cord or plug is damaged,
 - b. If liquid has been spilled, or objects have fallen into the product,
 - c. If the product has been exposed to rain or water,
 - d. If the product does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operating instructions as an improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the product to its normal operation,
 - e. If the product has been dropped or damaged in any way, and
 - f. When the product exhibits a distinct change in performance—this indicates a need for service.
- 21. Replacement Parts**—When replacement parts are required, be sure the service technician has used replacement parts specified by the manufacturer or have the same characteristics as the original part. Unauthorized substitutes may result in fire, electric shock or other hazards.
- 22. Safety Check**—Upon completion of any service or repairs to this product, ask the service technician to perform safety checks to determine that the product is in proper operating condition.
- 23. Wall or Ceiling Mounting**—The product should be mounted to a wall or ceiling only as recommended by the manufacturer.
- 24. Heat**—The product should be situated away from heat sources such as radiators, heat registers, stoves, or other products (including amplifiers) that produce heat.

NOTE TO CATV SYSTEM INSTALLERS:
 THIS REMINDER IS PROVIDED TO CALL THE CATV SYSTEM INSTALLER'S ATTENTION TO ARTICLE 820 - 40 OF THE NEC THAT PROVIDES GUIDELINES FOR PROPER GROUNDING AND, IN PARTICULAR, SPECIFIES THAT THE CABLE GROUND SHALL BE CONNECTED TO THE GROUNDING SYSTEM OF THE BUILDING, AS CLOSE TO THE POINT OF CABLE ENTRY AS PRACTICAL.

Figure A
 Example of antenna grounding as per National Electrical Code, ANSI/NFPA 70

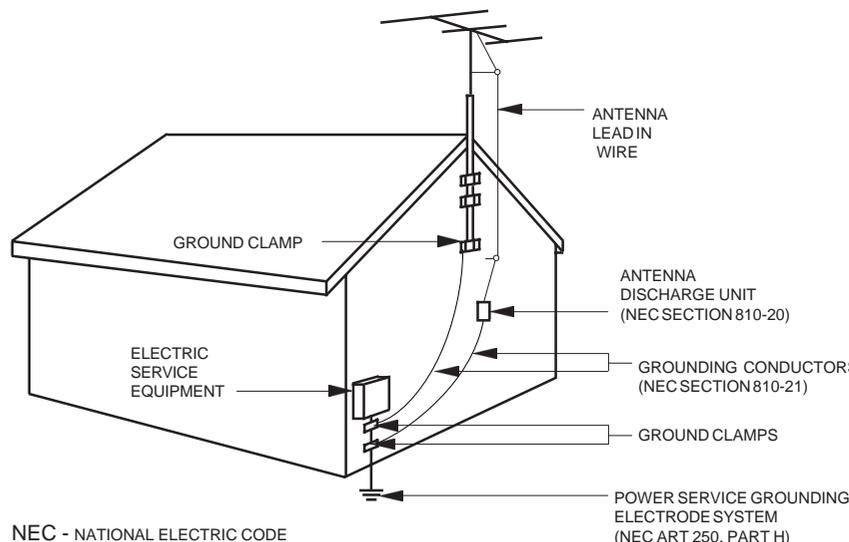


This page left intentionally blank

Thank you for purchasing a DRAKE® FMC 1000 FM STEREO MODULATOR. This product has been designed and manufactured to high quality standards, and will provide reliable operation for many years. Please carefully read the Instruction Manual for proper installation and usage.


Caution Statements	ii
Important Safety Instructions	iii
Table of Contents	v
Specifications / Options and Accessories	vi
Introduction - General Description	1
Front Panel Controls and Indicators	2
Rear Panel Controls and Connections	3
Installation	4
Setup and Operation	4
Service Information / If You Need To Call For Help	6
Warranty	7

SPECIFICATIONS -

Frequency Coverage:	88.1 to 107.9 MHz.	Power Requirement:	12 VDC @ 250 mA, regulated by supplied wall AC Adapter.
Frequency Selection:	Selectable by front panel ▲ / ▼ buttons and LCD frequency readout.	Size:	19" W x 1.75" H x 6.25" D.
Frequency Generation:	PLL Synthesis.	Weight:	5 lbs.
Frequency Stability:	±10 ppm, 0° to 50° C.	Front Panel:	LCD Display of Frequency and Mode, TUNE ▲ / ▼ buttons, Input Level Control with (Over) Modulation Indicators, Monitor output with Monitor Level Control.
Tuning Step Size:	100 kHz.	Rear Panel:	Qty (2) XLR connectors (Left and Right Balanced Audio Input) with GROUND LIFT Switch, Qty (2) RCA Phono Connectors (Left and Right Unbalanced Audio Input), Use Left Audio Inputs for Monaural audio input, Limiting/Compression switch, DC Power Input with Power On/Off Switch, and External Antenna connector.
Modulation:	FM, 200KF8E, multiplex stereo.		
FM Deviation:	±75 kHz, maximum.		
Pre-Emphasis:	75 µSec.		
Output Level:	+50 dBmV, nominal (adjustable +40 to +50 dBmV with rear panel accessible level control).		
Output Impedance:	75 Ohms.		
Audio Inputs-			
Stereo:	2 XLR (left and right audio), 2 RCA Phono (left and right audio).		
Mono:	Use Left XLR or Left RCA Phono input.		
Audio Input Level for 75 kHz Peak Deviation-			
XLR Connectors:	20K Ohm input impedance, balanced. -10 to +10 dBu manual gain adjustment with front panel modulation indicators.		
RCA Phono Connectors:	20K Ohm input impedance, balanced. -16 to +4 dBu manual gain adjustment with front panel modulation indicators.		
Frequency Response:	20 Hz to 15 kHz, ±3 dB referenced to a standard 75 µSec. pre-emphasis curve.		
Total Harmonic Distortion:	Less than 0.25%, typical.		

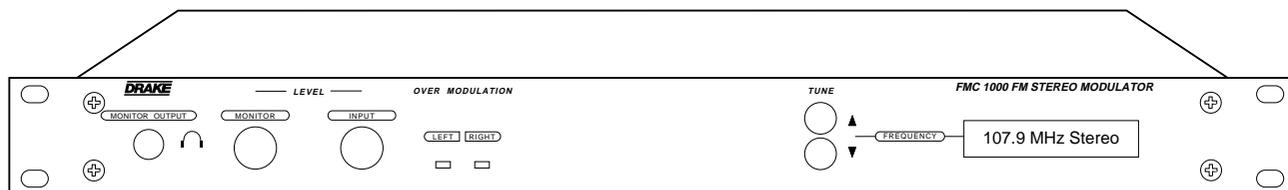

The R.L. Drake FMC 1000 FM STEREO MODULATOR is a high quality cable FM broadcast band modulator. Synthesized operation permits setting the operating frequency in 100 kHz increments from 88.1 to 107.9 MHz. The operating frequency and mode of operation, Stereo or Mono, is programmable with front panel buttons and is indicated on an LCD display. The modulator accepts balanced or unbalanced line level audio signals. Rear panel XLR connectors are provided for left and right balanced audio inputs and RCA phono connectors are provided for left and right unbalanced audio inputs. A Ground Lift switch is also provided for the XLR connectors. Full transmitter deviation with monaural audio input is provided by programming the unit for 'MONO' and connecting the audio signal input to the appropriate Left Audio Input connector. A rear panel Limiting/Compression switch permits setting no limiting, limiting only, or limiting and compression operation. A front panel Input Level control permits adjusting the audio input level with LED (OVER) MODULATION indicators. A front panel Monitor Output connector is provided with separate monitor level control. The unit is powered by a supplied external AC line to 12 VDC power adapter. A rear panel Power switch is also provided. The modulator can be rack mounted in a standard 1 RU rack package.

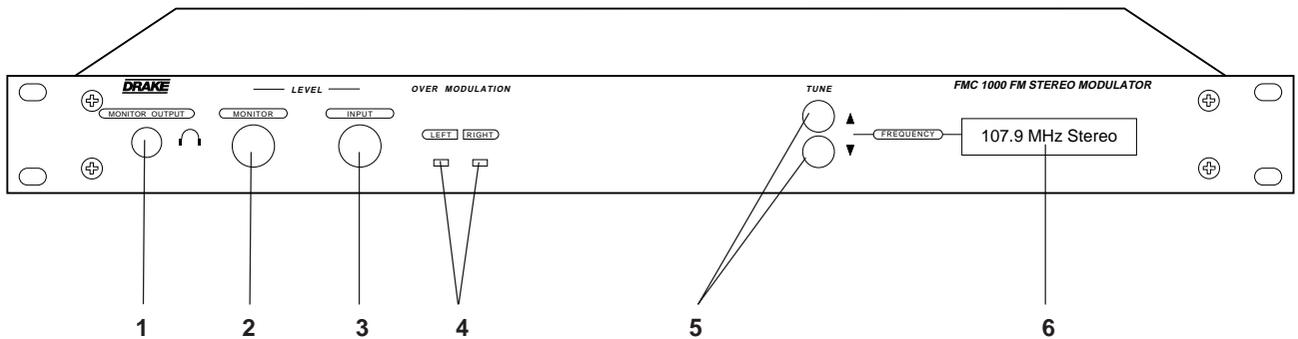

1. MONITOR OUTPUT - Connect headphones to listen to the audio that is supplied to the transmitter. The monitored level will vary with the level of the incoming audio, the setting of the INPUT LEVEL control, and the setting of the MONITOR OUTPUT level control.


2. MONITOR OUTPUT LEVEL Control - With the INPUT LEVEL control set properly, adjust this control for a comfortable listening level in the connected monitor headphones.

3. INPUT LEVEL Control - This control is used to adjust the input sensitivity. For a monaural audio input signal, set this control at or just below the point where the (OVER) MODULATION LED indicators light on audio peaks. For a stereo input signal, set this control at or just below the point where either of the (OVER) MODULATION LED indicators light on audio peaks.

4. (OVER) MODULATION Indicators - These indicators light to aid in the setting of the INPUT LEVEL control for proper modulation. They light to indicate that full modulation is being reached when the rear panel LIMITING/COMPRESSION switch (see rear panel Item 4) is set to "OFF". With the switch set for either the "L" or "C+L" position, these indicators will light on audio signal peaks as the limiter is activated at full modulation. Also see rear panel Item 4 for additional hints for proper setting of the LIMITING/COMPRESSION switch for a given type of audio source. Set the INPUT LEVEL control at or just below the point where the (OVER) MODULATION indicators light on audio peaks.

5. TUNE ▲ / ▼ Buttons - Press to set the displayed operating frequency: 88.1 - 107.9 MHz, in 100 kHz increments. Press and hold both buttons until the displayed 'Mono' or 'Stereo' flashes. Release both buttons and press either ▲ or ▼ to alternately set 'Stereo' or 'Mono' as required. After a short delay, the displayed 'Stereo' or 'Mono' will stop flashing. With a steady 'Stereo' or 'Mono' displayed, the TUNE ▲ / ▼ buttons permit setting the frequency.

6. FREQUENCY/Mode Display - Indicates the operating frequency and mode, Mono or Stereo, when the rear panel 'POWER' switch is set to the 'ON' position and the AC Adapter is connected and powered from an AC source.

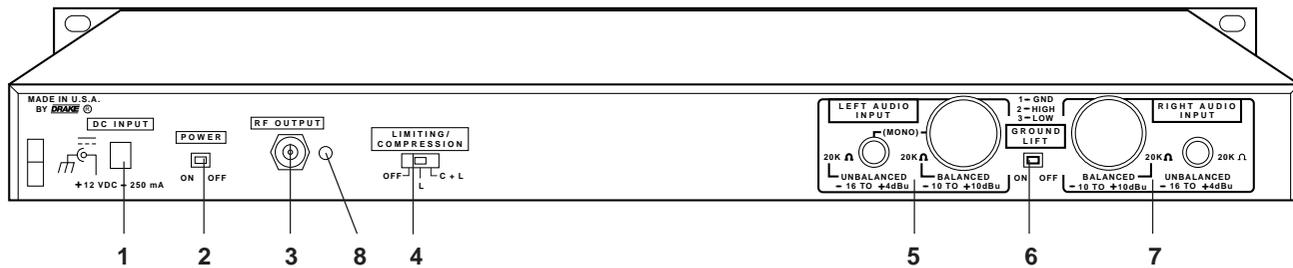

1. DC INPUT - Connect the supplied AC Adapter to this connector. Secure AC Adapter DC cable with the adjacent rear panel strain relief.

2. POWER ON/OFF Switch - Set this switch to the 'ON' position to operate the FMC 1000.

3. RF OUTPUT - This is the modulator output.

4. LIMITING/COMPRESSION SWITCH - This switch selects the operation of the limiter. Select the proper, or desired, setting according to the following criteria:

"OFF" - For audio sources with limiting and/or compression already applied. This setting bypasses the limiting circuitry of the FMC 1000. With the audio source connected, adjust the INPUT LEVEL control to a setting at or just below the point where the (OVER) MODULATION indicators light on audio peaks.

"L" - For most types of audio sources and listening environments. This setting provides automatic limiting on audio peaks to prevent loud bursts and to avoid over modulation conditions which can cause distorted audio at the receiver. With the audio source connected, (for example, the output of a public address amplifier with a person speaking at a normal level into the microphone), adjust the INPUT LEVEL control to a setting at the point where the (OVER) MODULATION indicators light on audio peaks.

"C+L" - For audio sources that contain relatively low audio levels combined with relatively high audio levels as might be encountered when the audio output from a public address amplifier contains audio from multiple microphones with different persons speaking. This setting provides automatic increasing of the low level audio passages combined with limiting on voice peaks. This type of audio processing can sometimes aid intelligibility for a person receiving the signal while located in a relatively noisy audio environment. With the audio source connected, and the weaker audio levels active, adjust the INPUT LEVEL control to a setting at or just below the point where the (OVER) MODULATION indicators light on audio peaks.

5. LEFT AUDIO INPUT - Connect monaural audio input signals to the appropriate unbalanced or balanced LEFT AUDIO INPUT connector. For monaural input, program the FMC 1000 to display 'MONO'. See Item 5; 'TUNE ▲/▼ Buttons' in the 'Front Panel Controls and Indicators' section of this manual.

For stereo input, connect an unbalanced line level left channel stereo audio signal to the phono connector or connect a balanced line level left channel stereo audio signal to the 3-pin female XLR connector. The unbalanced phono style input and the XLR balanced input on a given input (Left or Right) are each always active, so audio will be fed from whichever input is being used.

Do not attempt to connect signals to both the unbalanced and balanced connectors on a given input (Left or Right). All inputs can be considered high impedance ($\geq 20K$ Ohm). The shield connection at pin 1 of the XLR connector can be conveniently connected to ground (GROUND LIFT = 'OFF') or lifted from ground (GROUND LIFT = 'ON') to eliminate hum or noise as required. For stereo input, program the FMC 1000 to display 'STEREO'. See 'Front Panel Controls and Indicators: See Item 5; 'TUNE ▲/▼ Buttons' in the 'Front Panel Controls and Indicators' section of this manual.

6. GROUND LIFT Switch - Set to the 'OFF' position to connect pin 1 of both LEFT and RIGHT XLR connectors to ground. Set to the 'ON' position to disconnect both XLR connectors from ground.

7. RIGHT AUDIO INPUT - For stereo input, connect an unbalanced line level right channel stereo audio signal to the phono connector or connect a balanced line level right channel stereo audio signal to the 3-pin female XLR connector. Never connect signals to both the unbalanced and balanced connectors on a given input (Left or Right). The shield connection at pin 1 of the XLR connector can be conveniently connected to ground (GROUND LIFT = 'OFF') or lifted from ground (GROUND LIFT = 'ON') to eliminate hum or noise as required. For stereo input, program the FMC 1000 to display 'STEREO'. See Item 5; 'TUNE ▲/▼ Buttons' in the 'Front Panel Controls and Indicators' section of this manual.

Connect a monaural audio signal to the appropriate LEFT AUDIO INPUT connector. See Item 5: 'LEFT AUDIO INPUT', on this page.

8. Access Hole for RF OUTPUT Level Adjustment - The RF output level can be reduced to a value approximately 10 dB below the nominal level by adjustment of the potentiometer. The potentiometer is tunable through the access hole. Use a small straight-slot type screwdriver to adjust the potentiometer, if adjustment is necessary. Counterclockwise rotation of the potentiometer decreases the output level.

SETUP and OPERATION

Rack Mounting

Adequate ventilation is very important in multichannel installations. Units should be spaced apart by at least one panel height wherever possible. Some air movement is advisable in enclosed rack cabinets. Excessive heat will shorten component life and modulator performance will be degraded without proper cooling.

Installation Notes

Level adjustment provides optimum performance in multichannel installations. The RF output level from the FMC 1000 is +50 dBmV nominal. The level can be reduced to a value approximately 10 dB below the nominal level by adjustment of the potentiometer that is tunable through the rear panel access hole. The access hole is located adjacent to the RF OUTPUT connector. Use a small straight-slot type screwdriver to adjust the potentiometer, if adjustment is necessary. Counterclockwise rotation of the potentiometer decreases the RF output level. If an output level of less

than +40 dBmV is required, add an attenuator of the appropriate value to the modulator output.

Example: For an output level of +35 dBmV, add a 10 dB attenuator pad to the modulator output and adjust the level.


1. Connect the RF Output coaxial cable to the RF OUTPUT connector.


2. Make audio connections

The FMC 1000 will accept line level audio inputs. The best sources for a signal from a sound system are as follows:

- A. TAPE OUT or LINE OUT
- B. BOOSTER or BRIDGING
- C. Speaker Terminal

Use XLR connectors to connect balanced audio signals to the FMC 1000 AUDIO INPUTS. Use RCA phono connectors to connect unbalanced audio signals to the FMC 1000 AUDIO INPUTS. The following diagrams illustrate balanced and unbalanced audio wiring details:

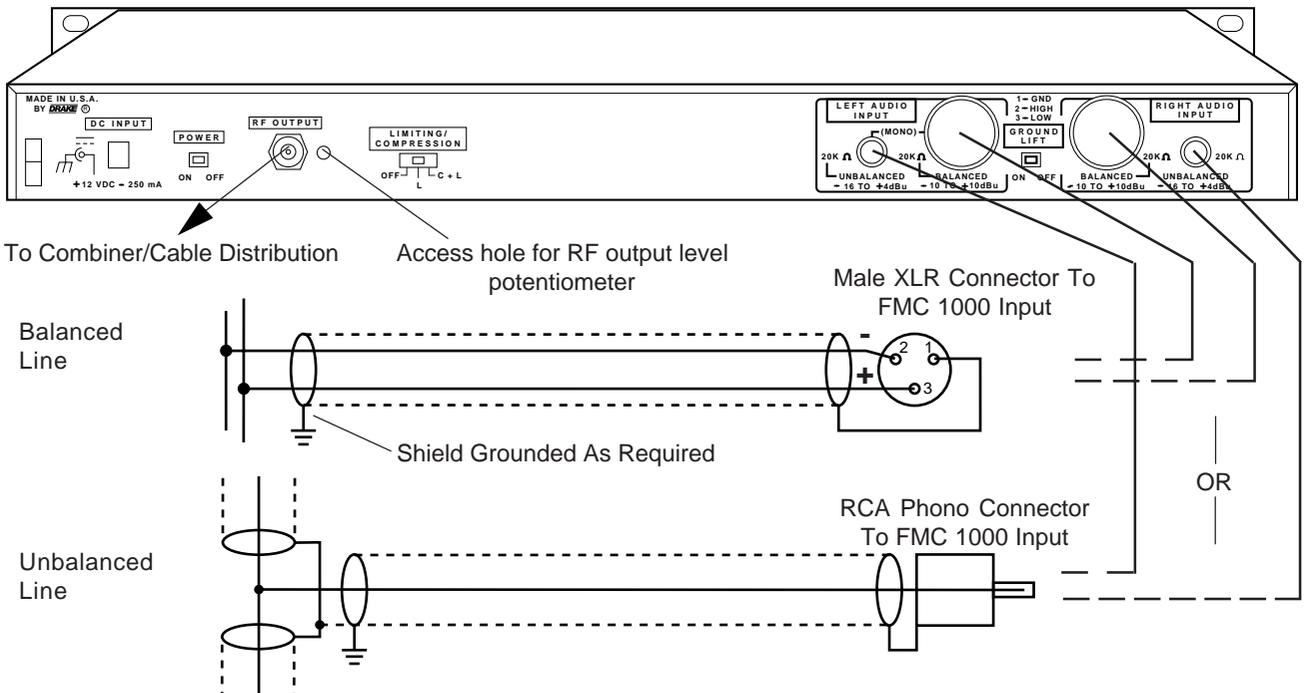

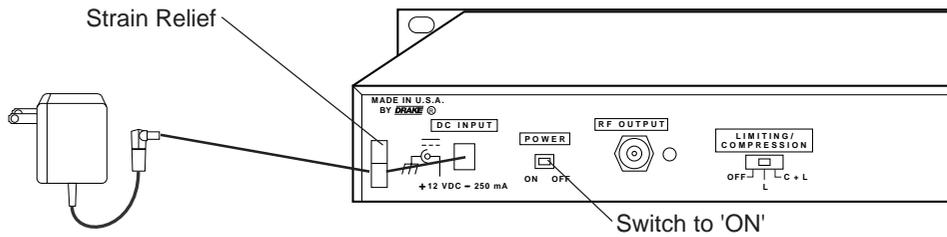

3. Connect the Transmitter to Power


Plug the DC power cord of the supplied AC Adapter into the DC INPUT connector on the rear panel of the FMC 1000 unit. Secure the DC power cord with the adjacently located strain relief. Plug the AC Adapter into a nominal 120 VAC, 60 Hz wall outlet. Set the rear panel POWER switch to the 'ON' position. The front panel display should now indicate the operating frequency and mode.

4. Set the Operating Frequency and Mode

Press the front panel ▲ / ▼ button to set the operating frequency.

If a monaural audio source is being supplied to the FMC 1000, set the displayed mode to 'MONO'. Set for 'STEREO' with stereo audio source material.

To set the mode, press and hold both TUNE ▲ / ▼ buttons until the mode 'MONO' or 'STEREO' flashes. Press either TUNE ▲ / ▼ button to set the required mode.



5. Set the INPUT and MONITOR Level Controls

With the audio source active, and the desired type of limiting set, adjust the INPUT LEVEL control clockwise until the (OVER) MODULATION LED indicators just begin to light on audio signal peaks. Refer to the "Rear Panel Controls and Connections" (Item 4) and the "Front Panel Controls and Indicators" (Items 3,4) sections of this manual for details. To monitor the audio source material, plug a set of headphones into the MONITOR OUTPUT jack. Adjust the MONITOR Level control for a comfortable listening level.

SERVICE INFORMATION

You may contact the R.L. DRAKE Service Department for additional information or assistance by calling +1 (937) 746-6990, Monday through Friday, between 8:00 A.M. and 4:00 P.M. Eastern Time, except on holidays.

You may also contact the R.L. DRAKE Service Department by E-mail at the following address:

service@rldrake.com

or by Telefax:

+1 (937) 743-4576.

Should you want to return your unit for service, package the unit carefully using the original carton or other suitable container.

Write your return address clearly on the shipping carton and on an enclosed cover letter describing the service required, symptoms or problems. Also include your daytime telephone number and a copy of your proof of purchase.

The unit will be serviced under the terms of the R.L. DRAKE COMPANY Limited Warranty and returned to you.

IF YOU NEED TO CALL FOR HELP

Call our Customer Service/Technical Support line at +1 (937) 746-6990 between 8:00 A.M. and 4:00 P.M. Eastern Time, weekdays. Please have the unit's serial number available. We will also need to know the specifics of any other equipment connected to the unit.

When calling, please have the unit up and running, near the phone if possible. Our technician(s) will likely ask certain questions to aid in diagnosis of the problem. Also, have a voltmeter handy, if possible.

R.L. DRAKE also provides technical assistance by

e-mail: service@rldrake.com

or by Telefax: +1 (937) 743-4576.

Many of the products that are sent to us for repair are in perfect working order when we receive them. For these units, there is a standard checkout fee that you will be charged. Please perform whatever steps are applicable from the installation sections of the Owner's Manual before calling or writing—this could save unnecessary phone charges. Please do not return the unit without contacting R.L. DRAKE first: it is preferred to help troubleshoot the problem over the phone (or by mail) first, saving you both time and money.

Inside the carton, enclose a note with your name, address, daytime phone number, and a description of the unit's problem.

The unit must be sent to the following address:

**Service Department
R.L. DRAKE COMPANY
230 Industrial Drive
Franklin, Ohio 45005 U.S.A.**

Be sure to include your street address which will be needed for UPS return. UPS Surface (Brown Label) takes 7-10 days to reach us depending on your location, Blue takes 2-3 days.

Red is an overnight service. Send the unit in a way that it can be traced if we can't verify receipt of shipment. We suggest UPS or insured postal shipment.

If the unit is still under the original owner's warranty, R.L. DRAKE will pay the cost of the return shipment to you. Our return shipping policy is that we will return it UPS Brown if received Brown or by US Mail, it will be returned Blue if received Blue or Red—or it will be returned however you prefer if you furnish the return cost for the method you select.

If the unit is out of warranty, it will be returned by UPS Brown label COD (UPS does not accept cash/currency) unless:

- 1) It was received UPS Blue/Red, in which case it will be returned UPS Blue/Red COD;
- 2) You designate billing to American ExPress, VISA, MasterCard or Discover card;
- 3) You prepay the service charges with a personal check, or
- 4) You specify some other method of return.

When calling, the technician can estimate the repair charges for you over the phone. This is another good reason to call before sending a unit in for repair. Typically, equipment is repaired in five to ten working days after it arrives at R.L. DRAKE if we have all the facts. If we must call you, it may take longer. R.L. DRAKE is not responsible for damage caused by lightning, nonprofessional alterations, "acts of God", shipping damage, poor storage/handling, etc. R.L. DRAKE will make note of any shipping damage upon receipt.

Should your warranty card not be on file at R.L. DRAKE, you will need to send proof of purchase to receive warranty service. Typically, a copy of the invoice from an R.L. DRAKE dealer will suffice. The warranty is for the original owner only and is not transferable.

Three Year Limited Warranty

R.L. DRAKE COMPANY warrants to the original purchaser this product shall be free from defects in material or workmanship for three (3) years from the date of original purchase.

During the warranty period the R.L. DRAKE COMPANY or an authorized Drake service facility will provide, free of charge, both parts and labor necessary to correct defects in material and workmanship. At its option, R.L. DRAKE COMPANY may replace a defective unit.

To obtain such a warranty service, the original purchaser must:

- (1) Retain invoice or original proof of purchase to establish the start of the warranty period.
- (2) Notify the R.L. DRAKE COMPANY or the nearest authorized service facility, as soon as possible after discovery of a possible defect, of:
 - (a) the model and serial number,
 - (b) the identity of the seller and the approximate date of purchase; and
 - (c) A detailed description of the problem, including details on the electrical connection to associated equipment and the list of such equipment.
- (3) Deliver the product to the R.L. DRAKE COMPANY or the nearest authorized service facility, or ship the same in its original container or equivalent, fully insured and shipping charges prepaid.

Correct maintenance, repair, and use are important to obtain proper performance from this product. Therefore carefully read the Instruction Manual. This warranty does not apply to any defect that R.L. DRAKE COMPANY determines is due to:

- (1) Improper maintenance or repair, including the installation of parts or accessories that do not conform to the quality and specifications of the original parts.
- (2) Misuse, abuse, neglect or improper installation.
- (3) Accidental or intentional damage.

All implied warranties, if any, including warranties of merchantability and fitness for a particular purpose, terminate three (3) years from the date of the original purchase.

The foregoing constitutes R.L. DRAKE COMPANY'S entire obligation with respect to this product, and the original purchaser shall have no other remedy and no claim for incidental or consequential damages, losses or expenses. Some states do not allow limitations on how long an implied warranty lasts or do not allow the exclusions or limitation of incidental or consequential damages, so the above limitation and exclusion may not apply to you.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state. This warranty shall be construed under the laws of Ohio.

For Service, contact:

R.L. DRAKE COMPANY
230 Industrial Drive
Franklin, Ohio 45005 U.S.A.
Customer Service and Parts Telephone: +1 (937) 746-6990
Telefax: +1 (937) 743-4576
World Wide Web Site: <http://www.rldrake.com>



R.L. DRAKE COMPANY
230 INDUSTRIAL DRIVE
FRANKLIN, OHIO 45005 U.S.A.
CUSTOMER SERVICE AND PARTS TELEPHONE: +1 (937) 746-6990
TELEFAX: +1 (937) 743-4576
WORLD WIDE WEB SITE: <http://www.rldrake.com>