


BAND - SWITCH SHOWN AT 1ST POSITION.
BROADCAST BAND
 BAND 1
 550 KC - 1450 KC


BAND - SWITCH SHOWN AT 2ND POSITION CLOCKWISE
 BAND 2
 1.5 MC - 4 MC

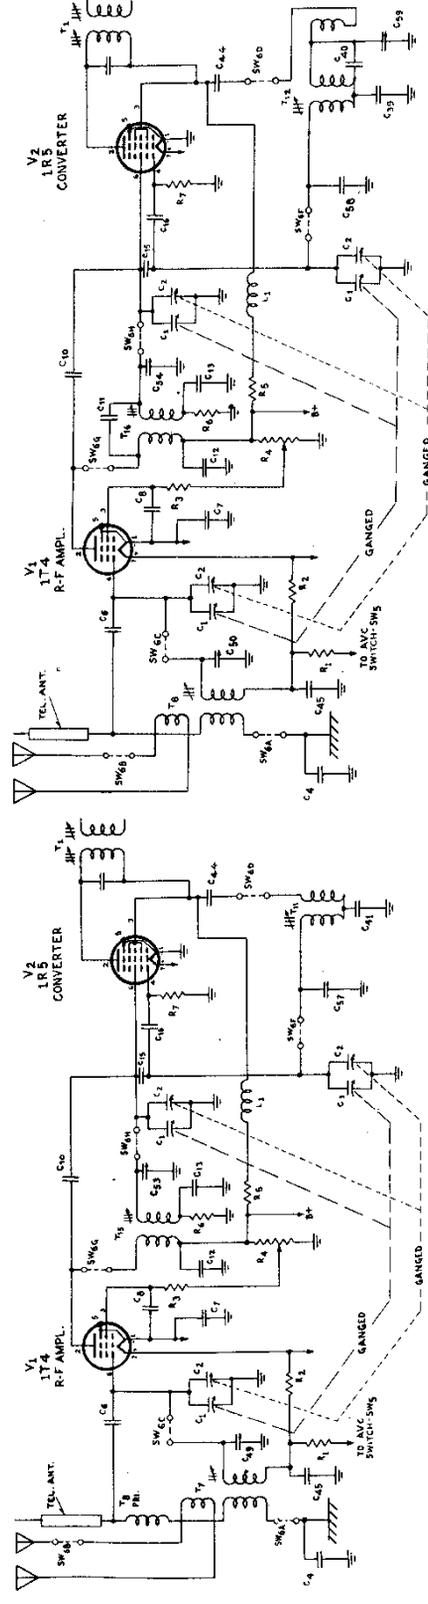

BAND - SWITCH SHOWN AT 3RD POSITION CLOCKWISE
 BAND 3
 4.5 MC - 11 MC

BAND - SWITCH SHOWN AT 4TH POSITION CLOCKWISE
 BAND 4
 11.5 MC - 30 MC

MODEL S-39, Skyranger THE HALLICRAFTERS CO.

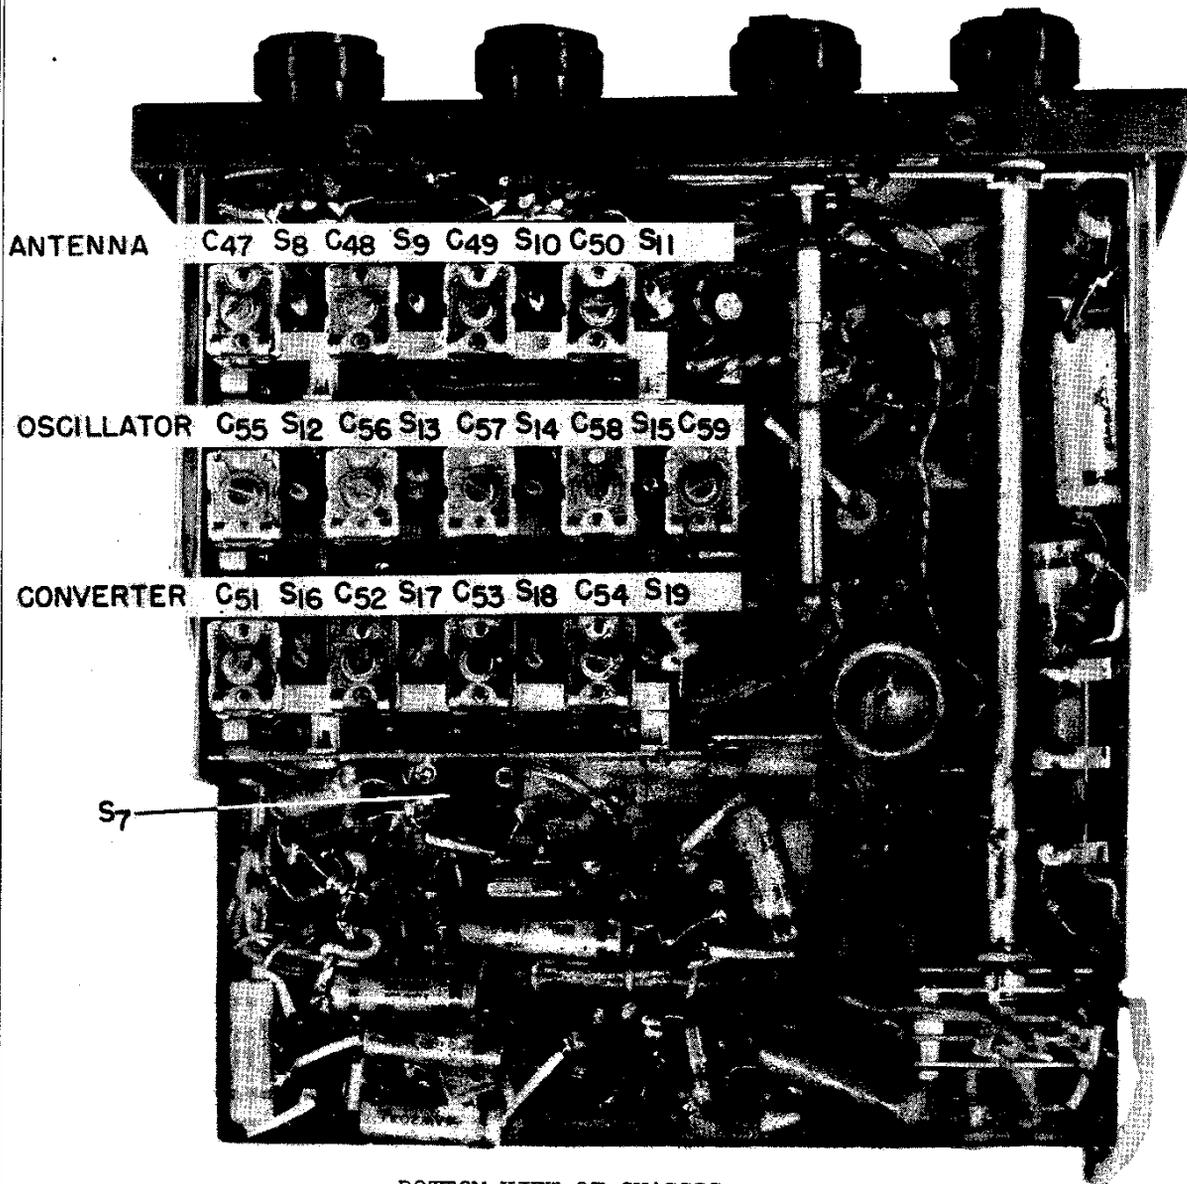

BOTTOM VIEW OF CHASSIS

TUBE	TYPE	PURPOSE
V ₁	1T4	R-F amplifier
V ₂	1R5	Converter and oscillator
V ₃	1P5GT	First i-f amplifier
V ₄	1P5GT	Second i-f amplifier
V ₅	1H5GT	Detector, A-V-C and first audio amplifier
V ₆	3Q5GT	Audio amplifier
V ₇	35Z5GT	Rectifier
V ₈	1H5GT	Beat frequency oscillator and automatic noise limiter
V ₉	35Z5GT	Rectifier

THE HALLICRAFTERS CO.

MODEL S-39, Skyranger

F-4. TABLE OF TUBE SOCKET VOLTAGES
Measured from socket pin to ground with 1000 ohm-per-volt meter
All voltages are D-C unless otherwise specified.

Tube	1	2	3	4	5	6	7	8	Cap.
Battery Supply									
V ₁ 174	2.62	87	84	NC	2.82	0	4.1	X	X
V ₂ 1R5	0	65	65	0	0	0	1.5	X	X
V ₃ 1P50T	0	2.7	87	60	NC	11.5	1.5	NC	0
V ₄ 1P50T	0	2.8	88	88	NC	X	1.4	NC	0
V ₅ 1H50T	0	1.45	62	NC	0	X	0	NC	0
V ₆ 3Q50T	NC	7.4	84	88	0	X	4.4	5.9	0
V ₇ 35Z50T	NC	0	NC	X	0	X	0	0	X
V ₈ 1H50T	0	4.4	*70	NC	0	X	2.8	NC	3.5
V ₉ 35Z50T	NC	0	NC	X	0	X	0	0	X
117 Volts AC									
V ₁ 174	2.6	103	92	NC	2.7	0	4.2	X	X
V ₂ 1R5	0	75	75	0	0	0	1.5	X	X
V ₃ 1P50T	0	2.5	105	75	NC	11.45	1.45	NC	0
V ₄ 1P50T	0	2.95	102	105	NC	X	1.55	NC	0
V ₅ 1H50T	0	1.5	70	NC	0	X	0	NC	0
V ₆ 3Q50T	NC	7.6	100	110	0	X	4.6	6.1	X
V ₇ 35Z50T	NC	0	7.8 A-C	X	114A-C	X	33.5 A-C	110	X
V ₈ 1H50T	0	4.3	*82.5	NC	0	X	2.95	NC	3.5
V ₉ 35Z50T	115 A-C	39.5 A-C	43 A-C	X	114A-C	115 A-C	65 A-C	110	X
120 Volts DC									
V ₁ 174	2.8	103	92	NC	2.8	0	4.2	X	X
V ₂ 1R5	0	72	72	0	0	0	1.5	X	X
V ₃ 1P50T	0	2.8	103	72	NC	11.5	1.5	NC	0
V ₄ 1P50T	0	3.2	102	102	NC	X	1.6	NC	0
V ₅ 1H50T	0	1.6	87	NC	0	X	0	NC	0
V ₆ 3Q50T	NC	7.7	100	103	0	X	4.8	6.3	X
V ₇ 35Z50T	NC	0	7.3	X	118	X	35	110	X
V ₈ 1H50T	0	4.8	*85	NC	0	X	3.2	NC	4
V ₉ 35Z50T	120	35	43	X	118	120	70	110	X

NC - No Connection.
X - No Pin.
* - With BFO switch at ON.
† - Tie Lug.

E-1. RECEIVER ALIGNMENT -

(s) Equipment needed to align the receiver -

- Signal generator to cover 455 KC to 30 MC
 - Non-metallic screwdriver
 - Output meter with a phone plug connector
 - .1 mfd. condenser
 - 6.5 mfd. condenser. (Dummy antenna)
- (b) Setting of controls for I-F alignment -
- AML, AVC and BFO switches at OFF
 - STAND BY switch at ON
 - A.F. and R.F. GAIN controls set at maximum gain
 - BAND SWITCH at #1 Band
 - POWER SWITCH at BAT. (power cord removed from wall socket)
 - BANDSPREAD TUNING at "0"
 - Telescoping antenna completely collapsed.

(c) I-F alignment (455 KC) -

- Remove top and bottom cover for access to internal components.
- Have external antenna plug PL₂ out of socket S₀.
- Connect "hot" lead of signal generator through the 1 mfd condenser to the lug on rear stator section of main tuning condenser (C₁).
- Set MAIN TUNING dial at 1500 KC
- Band #1
- Tune signal generator to 455 KC.
- Adjust slugs S₁ to S₆ inclusive for maximum output. Refer to figure 4 for location of the adjusting screws on transformers T₁, T₂ and T₃.

(e) Setting of controls for R-F alignment -

- AML, AVC and BFO switches at OFF
- STAND BY switch at ON
- A.F. and R.F. GAIN controls set at maximum gain
- BAND SWITCH at Band to be aligned (See alignment chart)
- POWER SWITCH at BAT. (power cord removed from wall socket)
- BANDSPREAD TUNING at "0"
- Telescoping antenna is collapsed except for bottom section
- Justing screws on transformers T₁, T₂ and T₃.
- Leave output meter plug in phone Jack (J₁)

Repeat adjustments of slugs S₁ generator to extended section of to S₆ to peak all the i-f transformers for maximum output.

Connect "Hot" lead of signal generator to extended section of the telescoping antenna through the 6.5 mfd dummy antenna condenser.

(d) B-F-O adjustment -

- Connect ground side of generator to chassis
- Have external antenna plug PL₂ out of socket S₀
- Set MAIN TUNING dial of receiver as shown in the alignment chart.

Set BFO switch at ON

- Adjust trimmers (C₄₇ to C₅₆) and slugs (S₇ to S₁₂) in the order shown on the alignment chart.
- Adjust tuning slug S₇ to desired pitch to the tone desired by turning slug S₇.
- Replace top cover after aligning the I-F and B-F-O transformers.

Note: It is possible to adjust the B-F-O pitch without the use of the signal generator. Tune end of band 4 by adjusting slug S₁₅, the oscillator may cease to function. A slight adjustment of condenser C₅₉ will bring it back into oscillation.


Note: Only one section of the telescoping antenna shall extend above the top cover of the receiver. (This procedure is necessary to obtain an accurate calibration for the dummy antenna of 6.5 mfd.) The receiver's top cover must be fastened down for the following adjustments.

ALIGNMENT CHART


BAND	SIGNAL GENERATOR FREQUENCY AND "MAIN TUNING" DIAL SETTING	ADJUST FOR MAXIMUM OUTPUT		OSCILLATOR FREQUENCY RELATIVE TO SIGNAL FREQUENCY
		OSCILLATOR SECTION	ANTENNA AND CONVERTER SECTIONS	
1	1.4 MC	C ₅₅	C ₄₇ and C ₅₁	455 KC Above
	.6 MC	S ₁₂	S ₈ and S ₁₆	
2	4.0 MC	C ₅₆	C ₄₈ and C ₅₂	455 KC Above
	2.0 MC	S ₁₃	S ₉ and S ₁₇	
3	10.0 MC	C ₅₇	C ₄₉ and C ₅₃	455 KC Above
	5.0 MC	S ₁₄	S ₁₀ and S ₁₈	
4	26.0 MC	C ₅₈	C ₅₀ and C ₅₄	455 KC Below
	14.0 MC	S ₁₅ C ₅₉	S ₁₁ and S ₁₉	

MODEL S-39, Skyranger


THE HALLICRAFTERS CO.

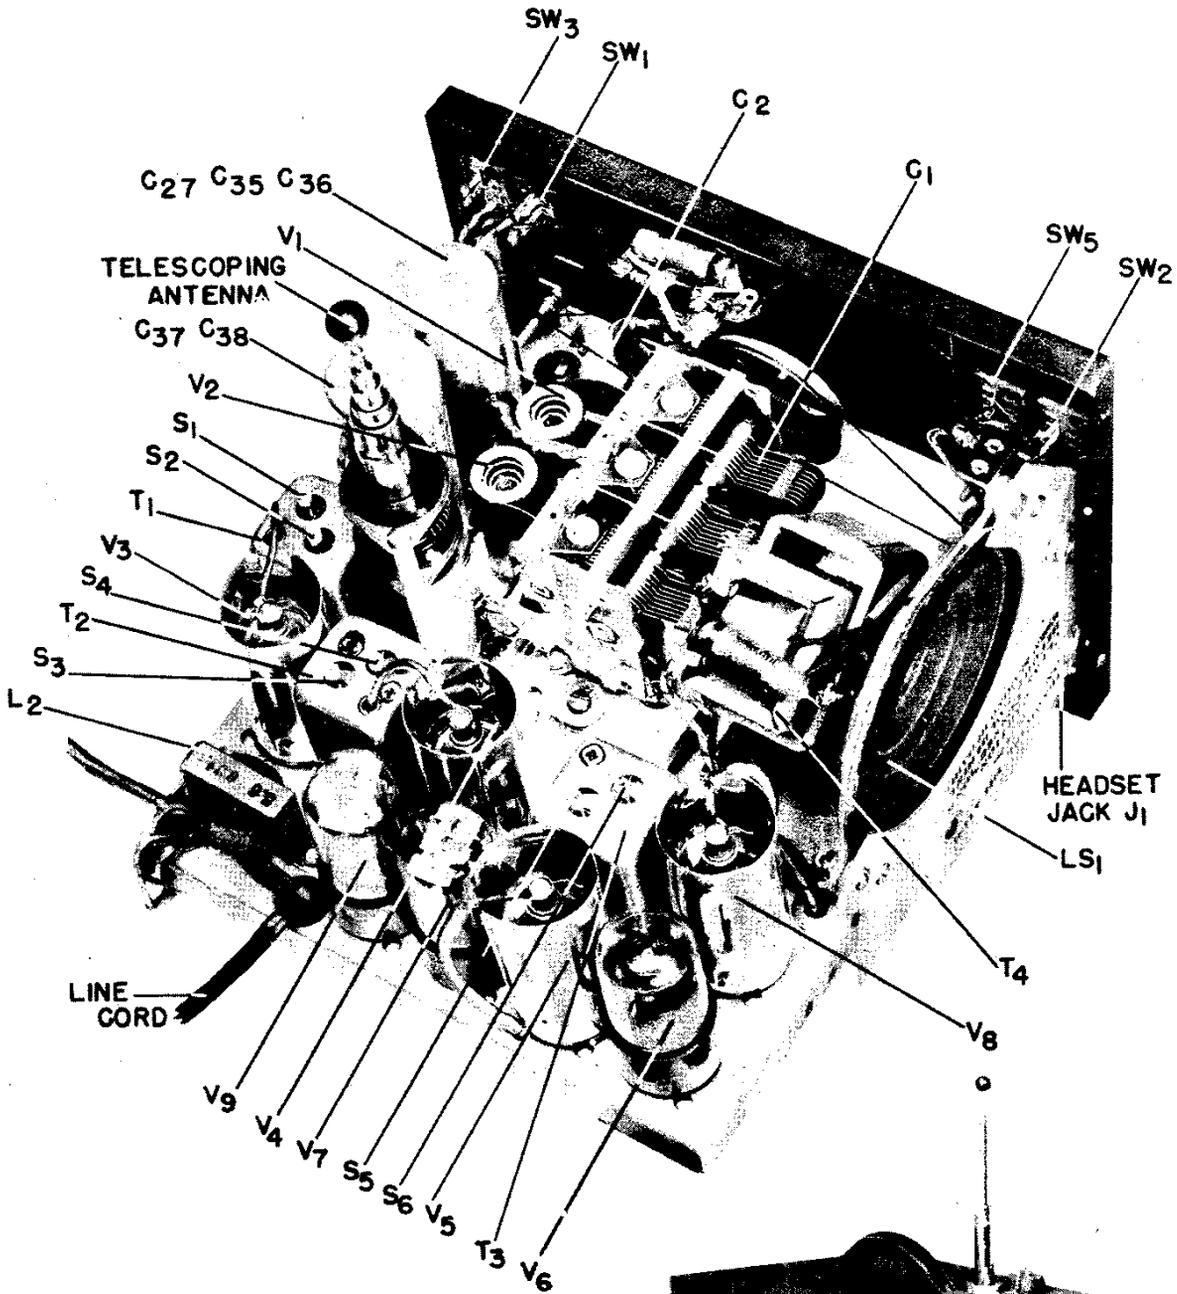

TOP VIEW.

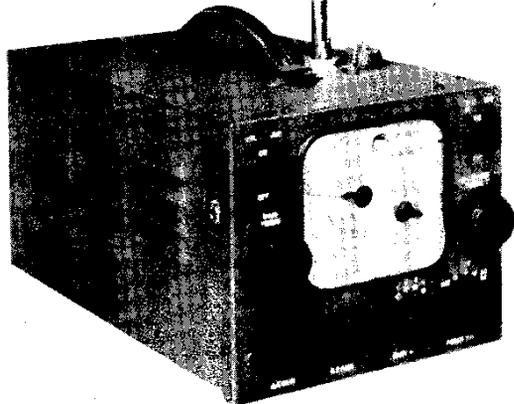

THE HALLICRAFTERS CO. MODEL S-39, Skyranger

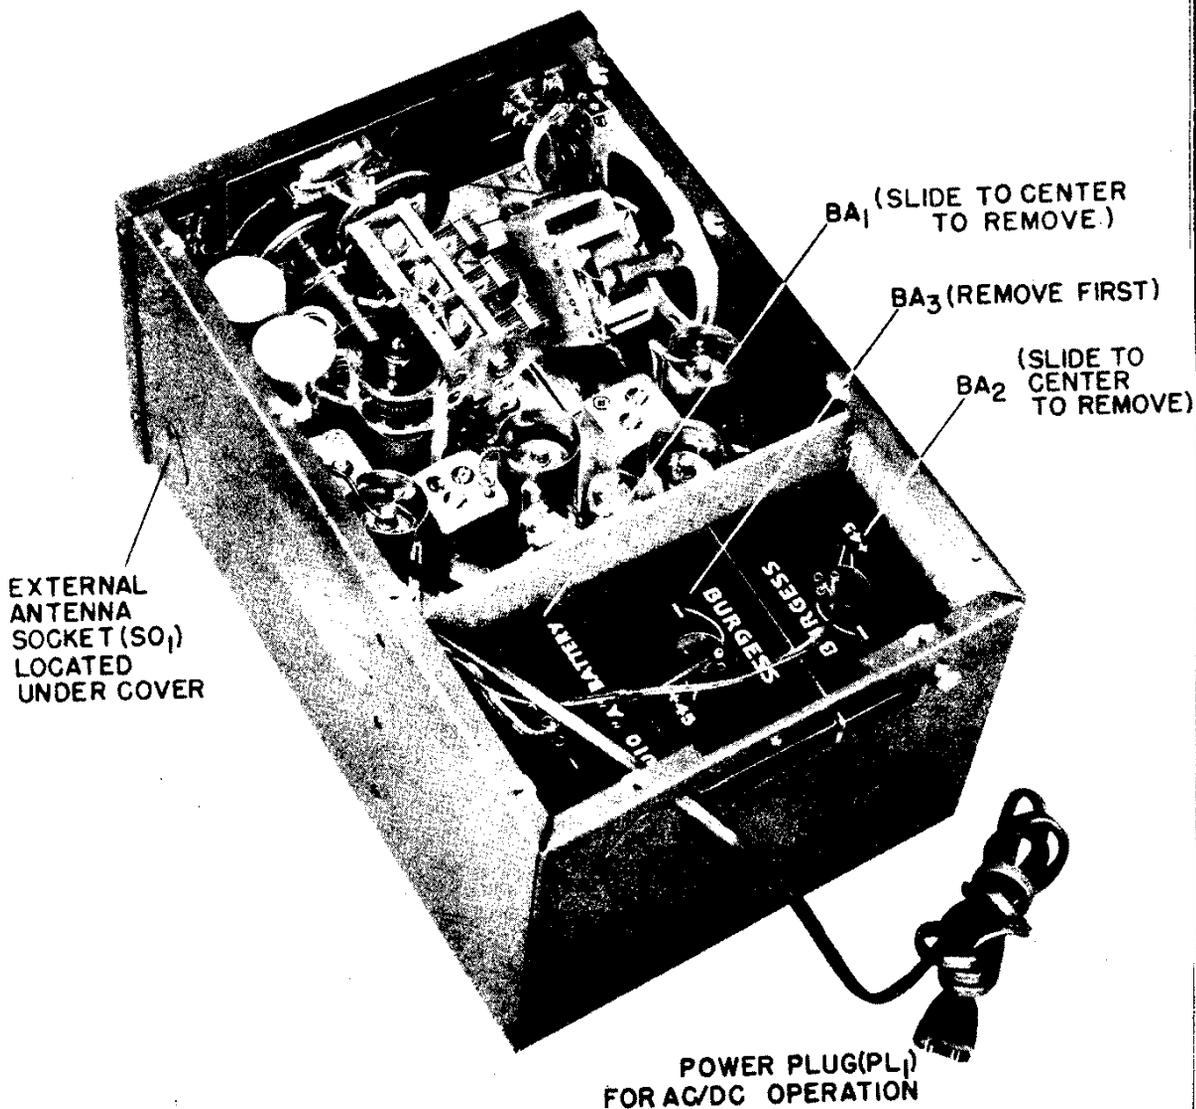

MODEL S-39 RECEIVER, REAR VIEW, COVER REMOVED, SHOWING POWER CORD COMPARTMENT AND BATTERY COMPARTMENT.

A-3. POWER SUPPLIES - Two separate and independent power supplies are incorporated in the receiver, namely an internal battery supply and a rectifier-filter type of supply for use with an external a-c/d-c source.

The battery supply consists of two 45-volt "B" batteries (BA₂ and BA₃) connected in series, and one 6-volt "A" battery (BA₁) all of which are located in the back section of the carrying-case cabinet. See figure 6.

The a-c/d-c supply consists of two type 35Z5GT rectifier tubes (V₇ and V₉) and the associated filter (L₂, C₃₅ and C₂₇) and filament voltage dropping resistors (R₃₂, R₃₃, R₃₄ and R₃₅). This supply may be used whenever commercial power lines, delivering 110-to 117-volts A-C or D-C are accessible. Refer to Section D for operating instructions.

The supply to be used is selected from the front panel by POWER SWITCH, SW₇. Refer to figure 2 for circuit details.

MODEL S-39, Skyranger

THE HALLICRAFTERS CO.

REF. SYMBOL	NAME OF PART AND DESCRIPTION	MFR. CODE	CONTR. S. PART NO.	REF. SYMBOL	NAME OF PART AND DESCRIPTION	MFR. CODE	CONTR. S. PART NO.
R ₁	Resistor, 2.2 megohm ± 10%, ½ watt, carbon	ASA	RC10AB225K	C ₈	Capacitor, 0.01 mfd. -10 + 40%, 400 V. D-C SP		46AW103J
R ₂	Same as R ₁				working, paper dielectric, type AB		
R ₃	Resistor, 8,200 ohm ± 10%, ½ watt, carbon	ASA	RC21AB922K				
R ₄	Resistor, variable, ½ megohm ± 20%, carbon	CT	25C071	C ₉	Same as C ₈		
R ₅	Resistor, 4700 ohm ± 10%, ¼ watt, carbon	ASA	RC10AE472K	C ₁₀	Capacitor, adjustable, min. cap. 5 mmfd., max. cap. 6.5 mmfd., 500 V. D-C working, temp. coeff. -.00075 mmfd./mmfd./degree Cent., ceramic dielectric, type 807-004	CRL	47A005
R ₆	Same as R ₁						
R ₇	Resistor, 100,000 ohm ± 10%, ½ watt, carbon	ASA	RC10AE104K	C ₁₁	Same as C ₁₀		
R ₈	Resistor, 1.0 megohm ± 10%, ¼ watt, carbon	ASA	RC10AE105K	C ₁₂	Same as C ₇		
R ₉	Same as R ₁			C ₁₃	Same as C ₇		
R ₁₀	Resistor, 51,000 ohm ± 5%, ½ watt, carbon	ASA	RC21AE513J	C ₁₄	Capacitor, 3 mmfd., twisted wire leads		
R ₁₁	Same as R ₁			C ₁₅	Capacitor, 2 mmfd., twisted wire leads		
R ₁₂	Same as R ₈			C ₁₆	Same as C ₃		
R ₁₃	Same as R ₇			C ₁₇	Same as C ₇		
R ₁₄	Resistor, variable, ½ megohm ± 20%, carbon	CT	25C070	C ₁₈	Same as C ₈		
R ₁₅	Resistor, 10 megohm ± 20%, ¼ watt, carbon	ASA	RC10AE106M	C ₁₉	Not used		
R ₁₆	Same as R ₇			C ₂₀	Same as C ₇		
R ₁₇	Resistor, 470,000 ohm ± 20%, ¼ watt, carbon	ASA	RC10AE474M	C ₂₁	Capacitor, 100 mmfd. ± 20%, 500 V. D-C work- ing, mica dielectric	ASA	CM20A101M
R ₁₈	Same as R ₁₇						
R ₁₉	Same as R ₁₇						
R ₂₀	Resistor, 47,000 ohm ± 20%, ¼ watt, carbon	ASA	RC10AE473M	C ₂₂	Capacitor, 0.004 mfd. -10 + 40%, 600 V. D-C A		46AZ402J
R ₂₁	Same as R ₂₀				working, paper dielectric, type 684		
R ₂₂	Not used			C ₂₃	Capacitor, 0.1 mfd. - 10 + 40%, 200 V. D-C A		46AU104J
R ₂₃	Not used				working, paper dielectric, type 284		
R ₂₄	Resistor, 24 ohm ± 5%, 1 watt, carbon	ASA	RC31AE240J	C ₂₄	Same as C ₈		
R ₂₅	Resistor, 330 ohm ± 5%, 9 watt, wire wound, candohm, type FH	MT	24A829	C ₂₅	Capacitor, 0.005 mfd. - 10 + 40%, 400 V. D-C A		46AW502J
R ₂₆	Not used			C ₂₆	Capacitor, 0.02 mfd. -10 + 40%, 400 V. D-C SP		46AW203J
R ₂₇	Resistor, 1000 ohm ± 10%, ¼ watt, carbon	ASA	RC10AE102K		working, paper dielectric, type AB		
R ₂₈	Not used.			C ₂₇	Capacitor, 60 mfd. -10 + 50%, 150 V. D-C working, electrolytic, one section of 3 section unit, 6 prong plug-in assembly, type 10B336	IC	45A065
R ₂₉	Resistor, 560 ohm ± 10%, ¼ watt, carbon	ASA	RC10AE561K	C ₂₈	Capacitor, 0.02 mfd. -10 + 40%, 400 V. D-C SP		46AW203J
R ₃₀	Same as R ₂₉				working, paper dielectric, type AB		
R ₃₁	Not used			C ₂₉	Same as C ₂₈		
R ₃₂	Same as R ₂₇			C ₃₀	Capacitor, 3 turn twisted wire leads		
R ₃₃	Resistor, 820 ohm ± 10%, 1 watt, carbon	ASA	RC31AE821K	C ₃₁	Same as C ₂₁		
R ₃₄	Resistor, 1645 ohm ± 10%, tapped at 800 ohm, 7.4 watt, 2 unit, wire wound, unit #1 800 ohm (R ₃₄), unit #2 845 ohm (R ₃₅), candohm, type MW-2			C ₃₂	Capacitor, 510 mmfd. ± 5%, 500 V. D-C work- ing, mica dielectric	ASA	CM20A511J
R ₃₅		IRC	24A044				
R ₃₆	Resistor, 820 ohm ± 10%, ¼ watt, carbon	ASA	RC10AE821K	C ₃₃	Same as C ₇		
R ₃₇	Not used.			C ₃₄	Capacitor, 0.05 mfd. -10 + 40%, 400 V. D-C A		46AW503J
R ₃₈	Same as R ₂₄				working, paper dielectric, type 484		
R ₃₉	Resistor, 1.5 megohm ± 20%, ¼ watt, carbon	ASA	RC10AE155M	C ₃₅	Capacitor, 30 mfd. -10 + 50%, 150 V. D-C working, electrolytic, one part of triple unit - refer to C ₂₇		
R ₄₀	Resistor, 450 ohm tapped at 87 ohm, 7 watt, 2 unit, wire wound, unit #1 363 ohm (R ₄₀), unit #2 87 ohm (R ₄₁) candohm, special			C ₃₆	Capacitor, 100 mfd. -10 + 65%, 5 V. D-C working, electrolytic, one part of triple unit - refer to C ₂₇		
R ₄₁		MT	24A819				
R ₄₂	Same as R ₇			C ₃₇	Capacitor, dual, 120 mfd. -10 + 50%, 150 V. D-C working (C ₃₈), 60 mfd. -10 ± 65%, 5 V. D-C working (C ₃₇), unit hermetically sealed IC		45A066
C ₁	Capacitor, variable, 3 section, 2 unit, unit #1-(C ₁), max. cap. per section 352 mmfd., air dielectric, unit #2-(C ₂) max. cap. per OM section 22 mmfd. air dielectric, each unit has separate drive shaft to which pulleys are fixed, type 945-3-20			C ₃₈	4 prong plug-in assembly, type 10B335		
C ₂							
C ₃	Capacitor, 51 mmfd. ± 5%, 500 V. D-C work- ing, low loss mica dielectric	ASA	CM20C510J				
C ₄	Capacitor, 0.1 mfd. -10 + 40%, 400 V. D-C A		46AV104J				
C ₅	Capacitor, 15 mmfd. ± 20%, 500 V. D-C work- ing, temp. coeff. -.00075 mmfd./mmfd./degree Cent., ceramic dielectric, type 809-047	CRL	47A027				
C ₆	Capacitor, 10 mmfd. ± 20%, 500 V. D-C work- ing, temp. coeff. -.00075 mmfd./mmfd./degree Cent., ceramic dielectric, type 811-013.	CRL	47A028				
C ₇	Capacitor, 0.05 mfd. -10 + 40%, 200 V. D-C SP		46AU503J				
				C ₃₉	Capacitor, 4300 mmfd. ± 5%, 500 V. D-C work- ing, mica dielectric	ASA	CM35A432J
				C ₄₀	Capacitor, 240 mmfd. ± 5%, 500 V. D-C work- ing, mica dielectric	ASA	CM20A241J

THE HALLICRAFTERS CO.

MODEL S-39, Skyranger

REF. SYMBOL	NAME OF PART AND DESCRIPTION	MFR. CODE	CONTR.'S. PART NO.	REF. SYMBOL	NAME OF PART AND DESCRIPTION	MFR. CODE	CONTR.'S. PART NO.
C ₄₁	Capacitor, 2000 mmfd. ± 5%, 500 V. D-C working, mica dielectric	ASA	CM30AR02J	SW ₇	Switch, rotary selector, 3 position, single section, non-shorting type contacts, has a type 8030-K4 toggle action, SPST A-C switch ganged on rear of assembly "ON" position full clockwise, type H	OM	60A162
C ₄₂	Capacitor, 910 mmfd. ± 3%, 500 V. D-C working, mica dielectric	ASA	CM30A911J	SO ₁	Socket, female, 4 contacts, bakelite insulation, wafer type, brass contacts, 2 mtg. holes with 1 1/4" mtg. centers, type 2642	CN	10A080
C ₄₃	Capacitor, 390 mmfd. ± 5%, 500 V. D-C working, mica dielectric	ASA	CM20A391J	PL ₁	Plug with line cord, 2 conductor, rubber insulation, #18 ga. stranded copper wire, length 6 feet, 2 prong spring type molded on plug, special	E	87A078
C ₄₄	Same as C ₈			BA ₁	Battery, 6 V. D-C, 2 hole socket, 3-7/8" x 2-15/16" x 5 1/2", type P698A	ROV	27A010
C ₄₅	Same as C ₇		46AT504J	BA ₂	Battery, 45 V. D-C, combination "B" socket, 4-1/8" x 2-9/16" x 5-5/16", type P5303	ROV	27A009
C ₄₆	Capacitor, 0.5 mfd. -10 + 40%, 200 V. D-C working, paper dielectric			BA ₃	Same as BA ₂		
C ₄₇	Capacitor, 4 unit assembly, mica dielectric, compression type adjustment, trimmers mounted on a single metal strip, 3 units with min. cap. 2.7 mmfd., max. cap. 35 mmfd. (C ₄₇ , C ₄₉ , C ₅₀) 1 unit with min. cap. 1.5 mfd., max. cap. 10 mmfd. (C ₄₈ special	UE	44A064	J ₁	Jack, single circuit, normally closed, brass mechanism, bakelite insulation, type LJ102	U	36A002
C ₄₈				LS ₁	Loudspeaker; 4 inch O.D. permanent magnet dynamic, includes transformer T ₄ in the assembly, type 4-OM-11A	OT	85B009
C ₄₉				LM ₁	Lamp, indicator, 1-1/8" leads, clear glass bulb type 4 1/2, type NE-7	GE	39A007
C ₅₀				V ₁	Tube, pentode, type 1T4	RCA	90XL14
C ₅₁	Capacitor, 5 unit assembly, mica dielectric, compression type adjustment, trimmers mounted on a single metal strip, 2 units with min. cap. 1.5 mmfd., max. cap. 10 mfd. (C ₅₁ and C ₅₂), 2 units with min. cap. 2.7 mmfd., max. cap. 35 mmfd. (C ₅₃ and C ₅₄), 1 unit with min. cap. 25 mmfd., MAX. 140 mmfd. (C ₅₅), special	UE	44A092	V ₂	Tube, pentagrid converter, type 1R5	RCA	90XLR5
C ₅₂				V ₃	Tube, type, 1P5GT	RCA	90X1P5GT
C ₅₃				V ₄	Same as V ₃		
C ₅₄				V ₅	Tube, diode triode, type 1R5GT	RCA	90X1R5GT
C ₅₅				V ₆	Tube, beam power amplifier, type 3Q5GT	RCA	90X3Q5GT
C ₅₆				V ₇	Tube, half-wave high-vacuum rectifier, type 3E25GT	RCA	90X3E25GT
C ₅₇				V ₈	Same as V ₅		
C ₅₈				V ₉	Same as V ₇		
C ₅₉							
C ₆₀	Not used						
C ₆₁	Same as C ₄₀						
C ₆₂	Same as C ₂₁						
T ₁	Transformer, I-F, 455 KC., fixed primary trimmer 155 mmfd., fixed secondary trimmer 80 mmfd., primary and secondary are tuned by adjustable iron cores, special	SI	50A066	FOR TROPICAL RECEIVERS USE THE ABOVE PARTS			
T ₂	Same as T ₁ except for length of leads	SI	50B157	T ₁	Transformer, I-F, 455 KC., fixed primary trimmer 155 mmfd., fixed secondary trimmer 85 mmfd., primary and secondary are tuned by adjustable iron cores, vacuum impregnated with zophar #1340 and flash dipped in Hollowax #2012, special (Note: T ₁ differs from T ₂ and T ₃ in the length of the wire leads)	SI	50A160
T ₃	Same as T ₁ , except for length of leads	SI	50B158				
T ₄	Transformer, A-F, primary to match the output of the type 3Q5GT tube, part of speaker assembly LS ₁ . Shown for reference only			T ₂	Transformer, I-F, 455 KC., fixed primary trimmer 155 mmfd., fixed secondary trimmer 85 mmfd., primary and secondary are tuned by adjustable iron cores, vacuum impregnated with zophar #1340 and flash dipped in Hollowax #2012, special (Note: T ₂ differs from T ₁ and T ₃ in the length of the wire leads)	SI	50A159
T ₅	Transformer, R-F, 4 unit assembly, tunes from .55 MC. to 30 MC. in 4 bands with condenser C ₁ and C ₂ , inductance adjusted by movable iron cores.	SWI	51B301				
T ₆							
T ₇							
T ₈							
T ₉	Transformer, R-F, 4 unit assembly, tunes from .55 MC. to 30 MC. in 4 bands with condensers C ₁ and C ₂ , inductance adjusted by movable iron cores	SWI	51B303				
T ₁₀							
T ₁₁							
T ₁₂							
SW ₂	Switch, DPST, slide action, bakelite insulation, steel mtg. plate with 2 holes having 1-1/8" mtg. centers, type 71	OM	60A061	L ₁	Reactor, R-F, inductance 170 microhenries, air core, vacuum impregnated with zophar #1340 and flash dipped in Hollowax #2012, type 3485	SWI	53A057
SW ₃	Same as SW ₂			L ₂	Reactor, filter, d-c resistance 250 ohms ± 20%, max. load current 30 milliamperes, inductance 3.6 henrys at 30 milliamperes, vacuum wax impregnated and flash dipped in Hollowax #2012, type 1A1251 modified	GT	56B051
SW ₄	Switch, SPST, toggle action, refer to SW ₂			SW ₆	Switch, rotary selector, 4 position, 3 section, shorting type contacts, bushing 1/4" long, terminal 6 of section 2 front and rear are electrically connected, type RM	MA	60B179
SW ₅	Switch, SPDT, slide, bakelite insulation, brass solder lugs, steel mtg. plate with 2 holes having 1-1/8" mtg. centers, type 77	OM	60A130				
SW ₆	Switch, rotary selector, 4 position, 3 section, shorting type contacts, bushing 1/4" long, type RM	MA	60B160				

MODEL S-39, Skyranger

THE HALLICRAFTERS CO.

RECOMMENDED ANTENNA INSTALLATIONS

MFR. CONTR.'S.
CODE PART NO.

SI 50A151

T₃ Transformer, I-F, 455 KC., fixed primary trimmer 155 mmfd., fixed secondary trimmer 85 mmfd., primary and secondary are tuned by adjustable iron cores, vacuum impregnated with zophar #1340 and flash dipped in Hallowax #2012, special, (Note T₃ differs from T₁ and T₂ in the length of the wire leads)

T₅ Transformer, R-F, 4 unit assembly, tunes from 0.55 MC. to 30 MC. in 4 bands with condenser C₁ and C₂, inductance adjusted by movable iron cores, wax impregnated with Hallowax #2012

SWI 51B648


T₉ Transformer, R-F, 4 unit assembly, tunes from 0.55 MC. to 30 MC. in 4 bands with condenser C₁ and C₂, inductance adjusted by movable iron cores, wax impregnated with Hallowax #2012

SWI 51B650

T₁₃ Transformer, R-F, 4 unit assembly, tunes from 0.55 MC. to 30 MC. in 4 bands with condenser C₁ and C₂, inductance adjusted by movable iron cores, wax impregnated with Hallowax #2012

SWI 51B649

REF. SYMBOL

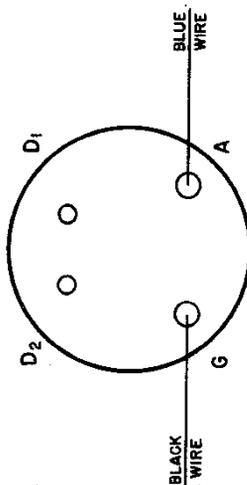

PL2 PIN VIEW

NOTE: PL2 IS SUPPLIED WIRED AS ABOVE

