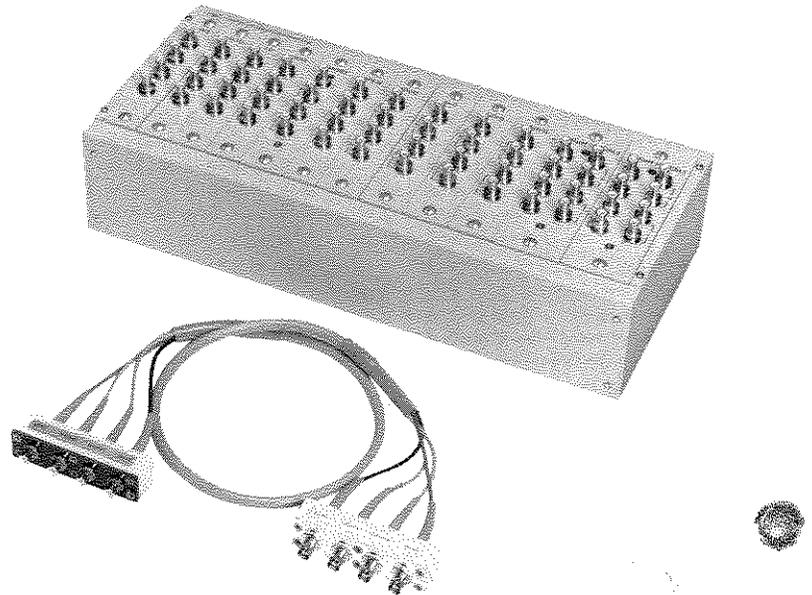


16074A CALIBRATION R-L STANDARD



JUL. 1981

 **HEWLETT
PACKARD**

WARRANTY AND ASSISTANCE

All Hewlett-Packard products are warranted against defects in materials and workmanship. This warranty applies for one year from the date of delivery, or, in the case of certain major components listed in the operating manual, for the specified period. We will repair or replace products which prove to be defective during the warranty period provided they are returned to Hewlett-Packard. No other warranty is expressed or implied. We are not liable for consequential damages.

For any assistance, contact your nearest Hewlett-Packard Sales and Service Office. Addresses are provided at the back of this manual.

MANUAL CHANGES

HP 16074A
Calibration R-L Standard

Operating Note

MANUAL IDENTIFICATION

Model Number: HP 16074A
Date Printed: May 1986
Part Number: 16074-90000

This supplement contains information for correcting manual errors and for adapting the manual to newer instruments that contains improvements or modifications not documented in the existing manual.

- To use this supplement
1. Make all ERRATA corrections
 2. Make all appropriate serial-number-related changes listed below

SERIAL PREFIX OR NUMBER	MAKE MANUAL CHANGES
All	► Change 1
All	► Change 2
All	► Change 3

SERIAL PREFIX OR NUMBER	MAKE MANUAL CHANGES

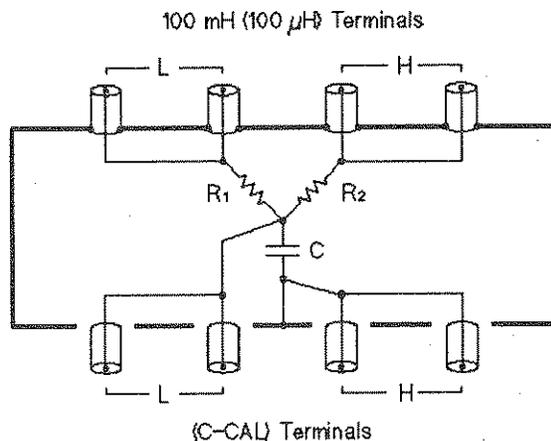
► New Item

Change 1

Page 1, Section 5 Quasi-Inductance Standards

Change section 5 as follows:

The HP 16074A's quasi-inductance standard consists of two resistors and a capacitor, and it acts as an inductor when it is measured with HP four-terminal pair LCR meters. Figure 1 shows the quasi-inductance standard's structure and an equivalent impedance when the quasi-inductance Standard's 100 μH (or 100 mH) terminals are connected to an HP LCR meter.



$$Z = R_s + j\omega L_s$$

$$R_s : R_1 + R_2$$

$$L_s : CR_1R_2$$

j : Imaginary Unit

ω : Angular Frequency

Figure 1. Quasi-Inductance Standard Structure

NOTE

Manual change supplement are revised as often as necessary to keep manuals as current and accurate as possible. Hewlett-Packard recommends that you periodically request the latest edition of this supplement. Free copies are available from all HP offices. When requesting copies, quote the manual identification information from your supplement, or the model number and print date from the title page of the manual.

Table 1 shows the typical values for the resistors and the capacitor in Figure 1.

Table 1. Typical Values for Quasi-Inductance Standards

Description	R1	R2	C
100 mH	1 k Ω	1 k Ω	100 nF
100 μ H	316 Ω	316 Ω	1 nF

The quasi-inductance standard's equivalent inductance should be measured by its user before it is used to confirm LCR meter's inductance measurement operation. The measurement procedure is as follows:

1. Measure the two resistors of the quasi-inductance standard using a four terminal connection DC resistance meter, and record these two resistance values as R1 and R2.
 - * R1 is the resistance between the 100 mH (or 100 μ H) L terminal and the (C-CAL) L terminal.
 - * R2 is the resistance between the 100 mH (or 100 μ H) H terminal and the (C-CAL) L terminal.
2. Measure the capacitance of the quasi-inductance standard using a four-terminal pair LCR meter, and record the capacitance value as C.

* Connect the (C-CAL) terminal to the LCR meter to measure the capacitance.

3. Calculate the equivalent inductance according to the following equation.

$$\text{Equivalent Inductance} = (C - 7 \text{ pF}) \times R1 \times R2$$

* 7 pF is the correction capacitance for the BNC connectors.

Change 2

Page 1, Section 7 Calibration Data

Change section 7 as follows:

The calibration data for each resistance module of the HP 16074A is given on the calibration data sheet provided with the HP 16074A. Table 2 shows the calibrated parameters and their calibration uncertainties.

The HP 16074A should be calibrated at the facility which satisfies the calibration uncertainties given in Table 2. Hewlett-Packard's calibration laboratories satisfy all of these calibration uncertainties.

Table 2. Calibrated Parameters

Module Description	Calibrated Parameter	Calibration Uncertainty
$0.1 \Omega^1$	R _{DC} L _s	1.0% 1 nH
$1 \Omega^1$	R _{DC} L _s	0.1% 0.3 nH
$10 \Omega^1$	R _{DC} L _s	0.03% 1 nH
$100 \Omega^2$	R _{DC} L _s G _{DC} C _p	0.03% 20 nH 0.03% 2 pF
$1 k\Omega^2$	R _{DC} C _p	0.03% 0.2 pF
$10 k\Omega^2$	R _{DC} C _p	0.03% 0.1 pF
$100 k\Omega^2$	R _{DC} C _p	0.03% 0.05 pF

R_{DC}: Resistance at DC

G_{DC}: Conductance at DC

L_s: Equivalent Series Inductance at 1 MHz

C_p: Equivalent Parallel Capacitance at 1 MHz

1: Calibrated values are relative to the HP 16074A's 0 Ω module.

2: Calibrated values are relative to the HP 16074A's SHORT module.

Change 3

Page 2, Table 1. Specifications

Delete the Calibration Accuracy column in Table 1.

1. INTRODUCTION

This operating note provides the information necessary to use the Model 16074A calibration R-L standard, shown pictorially on the front cover. Included is a description of the 16074A, its specifications, the internal construction of each standard, and other basic information. Specifications are listed in Table 1.

2. DESCRIPTION

The 16074A is specially designed for calibration and performance testing of HP's various four-terminal-pair type LCR meters. It consists of eight resistance standards--0 Ω , 0.1 Ω , 1 Ω , 10 Ω , 100 Ω , 1k Ω , 10k Ω , and 100k Ω --two quasi-inductance standards--100 μ H and 100mH--and two terminations--OPEN and SHORT. The state-of-the-art four-terminal-pair configuration of the 16074A insures high accuracy at frequencies up to 13MHz. The 0 Ω through 10 Ω standards contain thin film resistors that have minimal residual reactance and stray capacitance; the 100 Ω through 100k Ω standards are each shielded to reduce the effects of noise.

3. OPEN AND SHORT TERMINATIONS

The 16074A's OPEN and SHORT terminations facilitate optimum open and short zero offset compensation of the test instrument to insure accurate measurements. Before calibrating the test instrument with any capacitance, inductance, or resistance standards, open and short zero offset compensation must be performed. For details, refer to the test instrument's Operation Manual.

4. RESISTANCE STANDARDS

The nominal value of each resistance standard is specified at DC and is extended up to 13MHz. The high frequency characteristics are based on the appropriate series or parallel equivalent circuit calculations. The 100 Ω , 1k Ω , 10k Ω , and 100k Ω standards are designed for resistance measurement calibration; thus, nominal value accuracy is $\pm 0.1\%$. The 0.1 Ω , 1 Ω , and 10 Ω standards, however, are designed for phase accuracy calibration. They have extremely low residual reactance, and are calibrated for their phase accuracy rather than resistance accuracy. Basic accuracy is, thus, $\pm 10\%$.

Note

The SHORT termination and the 0 Ω resistance standard should not be used interchangeably. The SHORT

termination is an absolute short, intended for short zero offset compensation in capacitance, inductance, and resistance measurements calibration. The 0 Ω standard, however, is not an absolute 0 Ω . It, like the 0.1 Ω , 1 Ω , and 10 Ω standards, is intended for phase measurement calibration only. Before calibrating the test instrument's phase measurement accuracy, perform zero offset compensation using the 0 Ω standard and OPEN termination. In all other cases, use the SHORT and OPEN terminations.

5. QUASI-INDUCTANCE STANDARDS

Because of the inherent parasitic impedances (coil resistance and distributed capacitance) of inductors, it is not possible to build an inductance standard usable in the RF region. Therefore, each of the two quasi-inductance standards in the 16074A is constructed using two resistors and one capacitor, offering equivalent inductances of 100 μ H and 100mH. The internal construction is illustrated in Table 2 and the equivalent circuits are shown in Table 1.

6. CONNECTING THE 16074A

The 16074A can be connected to the test instrument in one of two ways: (1) directly to the instrument's UNKNOWN terminals or (2) via the furnished four-terminal-pair cable (P/N: 16074-61600). Either connection method can be used without affecting the measurement accuracy of the instrument. SHORT and OPEN zero offset compensation must be performed, though, to cancel the residual inductance, residual resistance, and stray capacitance of the cable. Also, when the cable is used and the test signal frequency is higher than 1MHz, the test instrument must be set to the appropriate cable length. Refer to the test instrument's Operation and Service Manual for details.

7. CALIBRATION DATA

Calibration data for each resistance standard at DC and each quasi-inductance standard at several test frequencies are given on the calibration data sheet included in the 16074A.

8. CALIBRATION CYCLE

The recommended calibration cycle of the 16074A is once a year.

9. REPAIR

The 16074A is not field repairable. If any of the standards or terminations are damaged or if a significant nominal value change is observed,

return the unit to Hewlett-Packard for service. For complete information on service or calibration, contact the nearest Hewlett-Packard office.

Table-1. Specifications.

Contents:

Resistors --- 0Ω, 0.1Ω, 1Ω, 10Ω, 100Ω, 1kΩ, 10kΩ and 100kΩ

Terminations --- open and short

Inductors --- 100μH and 100mH

Useable frequency: DC to 13MHz

Accessory furnished:

1m cable --- HP P/N: 16074-61600

Environmental temperature:

23°C ± 5°C

Characteristics:

Nominal Value	Equivalent Circuit	Parameter Main/Sub	Calibration Accuracy	Typical Frequency Characteristic	Typical Temperature Coefficient
0.1Ω ± 10% *1		Rs	±0.1% at DC	$\pm \frac{f^2 \text{MHz}}{1000} \%$	±100 PPM
		Ls	0 ± 1nH up to 1MHz	---	---
1Ω ± 10% *1		Rs	±0.1% at DC	$\pm \frac{f^2 \text{MHz}}{1000} \%$	-60 PPM
		Ls	±0.2nH at 1MHz	---	---
10Ω ± 10% *1		Rs	±0.03% at DC	$\pm \frac{f^2 \text{MHz}}{1000} \%$	-60 PPM
		Ls	0 ± 1nH up to 10MHz	---	---
100Ω ± 0.1%		Rs	±0.03% at DC	$\pm \frac{f^2 \text{MHz}}{1000} \%$	±10 PPM
		Ls	±20nH at 1MHz	---	---
1kΩ ± 0.1%		Rp	±0.03% at DC	$\pm \frac{f^2 \text{MHz}}{1000} \%$	±10 PPM
		Cp	±0.2pF at 1MHz	---	---
10kΩ ± 0.1%		Rp	±0.03% at DC	$\pm \frac{2f^2 \text{MHz}}{100} \%$	±10 PPM
		Cp	±0.2pF at 1MHz	---	---
100kΩ ± 0.1%		Rp	±0.03% at DC	$\pm 2f^2 \text{MHz} \%$	±10 PPM
		Cp	±0.2pF at 1MHz	---	---
100mH + 2kΩ		Ls	100nF measurement error + 0.1%	$\pm 10f^2 \text{MHz} \%$	±10 PPM
		Rs	±0.03% at DC	$\pm \omega L D$ *4	---
100μH + 632Ω		Ls	1000pF measurement error + 0.2%	$\pm 4 \left(\frac{f \text{MHz}}{10} \right)^2 \%$	±10 PPM
		Rs	±0.03% at DC	$\pm \omega L D$ *4	---

*1 The calibration values of 0.1Ω thru 10Ω resistors are defined as the difference (respectively resistance and residual reactance) on the basis of 0Ω.

*2 Rs is equal to R1 plus R2.

*3 This equation includes a compensation of the stray capacitance associated with the BNC terminals.

*4 D is the dissipation value of the capacitor at the respective setting frequencies.





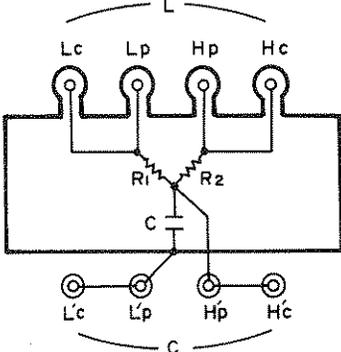
Dimensions:

423(W) x 120(H) x 186(W) mm

Weight:

Approximately 4.4kg

Table 2. Construction of Each Standard

Standard	Use	Construction
0Ω	Termination for zero offset adjustment (short: cancellation of residual inductances and resistances) prior doing frequency phase accuracy check.	
0.1Ω 1Ω 10Ω	Frequency phase accuracy check.	
100Ω 1kΩ 10kΩ 100kΩ	Resistance measurement accuracy check.	
Open Termination	Termination for zero offset adjustment (open: cancellation of stray capacitance) to perform accurate measurements.	
Short Termination	Termination for zero offset adjustment (short: cancellation of residual inductances and resistances) to perform accurate measurements.	
100μH 100mH	Inductance measurement accuracy check.	

2 SALES OFFICES Arranged alphabetically by country (cont.)

MEXICO Hewlett-Packard Mexicana, S.A. Av. Reforma Sur No. 6501 Tepic, Jalisco 95060 MEXICO D.F. Tel: 0 78 46 36 Fax: 0 78 46 302 HEPACK MEX ADRESA M.S.P. Hewlett-Packard Mexicana, S.A. S de RL Ave. Colonia del Valle 405 Col. del Valle Monterrey, Nuevo Leon Tel: 78 42 41 Fax: 038 410 Tel: 551 109

MOROCCO Casaba El Sur Alcazar CASABLANCA Tel: 37901 27095 Fax: 37901 29392 Tel: 551 109

NETHERLANDS Hewlett-Packard Nederland B.V. Van Heester Gedeputeerde 121 NL 1816 AA AMSTELVEEN P.O. Box 667 Tel: 4020 4770 11 Fax: 0 21 86 1814 A.C.H.M.C.S.E.M.P. Hewlett-Packard Nederland B.V. Rijnweg 7 NL 2008 BV CAPELLE A D USSEL P.O. Box 21 Tel: 0163 51 64 44 Fax: 0163 51 64 20 A.C.H.M.C.S.E.M.P. Hewlett-Packard Nederland B.V. Postbus 134 136 NL 5111 LV ENDOHVEN P.O. Box 1342 NL 5001 EN ENDOHVEN Tel: 36401 306611 Fax: 31 484 1699 11 A.C.H.M.C.S.E.M.P.

NEW ZEALAND Hewlett-Packard NZ Limited 5 Owen Road P.O. Box 15 189 Auckland Auckland Tel: 09 21 150 Cable: HEPACK Auckland (NZ) Ltd Hewlett-Packard NZ Limited 47 Cluckston Street Nelson WELINGTON P.O. Box 5943 Christchurch WELINGTON P.O. Box 4307 Christchurch WELINGTON Tel: 03 377 189 Cable: HEPACK Wellington (NZ) Ltd P.O. Box 4307 Christchurch WELINGTON Tel: 03 377 189

NEW ZEALAND Hewlett-Packard NZ Limited 5 Owen Road P.O. Box 15 189 Auckland Auckland Tel: 09 21 150 Cable: HEPACK Auckland (NZ) Ltd Hewlett-Packard NZ Limited 47 Cluckston Street Nelson WELINGTON P.O. Box 5943 Christchurch WELINGTON P.O. Box 4307 Christchurch WELINGTON Tel: 03 377 189 Cable: HEPACK Wellington (NZ) Ltd P.O. Box 4307 Christchurch WELINGTON Tel: 03 377 189

NORTHERN IRELAND See United Kingdom NORWAY Hewlett-Packard Norge AS Fosse Bogenveien 50 P.O. Box 3558 BIRKENES (Bergen) Tel: 06 47 50 55 40 Fax: 06 47 50 55 40 A.C.H.M.C.S.E.M.P. Hewlett-Packard Norge AS Osloveien 18 P.O. Box 38 1345 OSLO Tel: 02 47 12 11 80 Fax: 02 47 12 11 80 A.C.H.M.C.S.E.M.P.

OMAN Hama Ramdas P.O. Box 2500 MUSCAT Tel: 222225 745001 Tel: 3788 BIRCHEN MS MUSCAT P.O. Box 169 Sultan & Saad Binham P.O. Box 169 MUSCAT Tel: 724 201 3 Cable: FEMUS Ramdas # 14 Muscat & Company Ltd Oman Chambers Alkhalid Haroon Road

PAKISTAN Musko & Company Ltd 18 Street # 1 Sector # 81 DUBLAHD Tel: 5107 Cable: FEMUS Ramdas # 14 Musko & Company Ltd Oman Chambers Alkhalid Haroon Road

KARACHI (P.O.) Tel: 524211, 524130 Fax: 524211, 524130 Cable: HEPACK KARACHI ATMS PANAMA Panama S.A. Calle Panama, P.O. Box 489 Panama 9109 PANAMA Tel: 01 63 12 63-6740 Cable: ELECTRON PD # 489 A.C.H.M.P. PERU Cia Peru America S.A. Av. Junipero 143, San Jose Obispo 10 10 Lima 1 Tel: 41 4225, 41 3703 Cable: Pac. Book 250306 # 489 A.C.H.M.P. PHILIPPINES The Cyber Advanced Systems Corporation, Ateneo Center, Ateneo Dr. Manila 1101 Manila Tel: 524 21 41, 524 21 42, 524 21 43, 524 21 44, 524 21 45, 524 21 46, 524 21 47, 524 21 48, 524 21 49, 524 21 50, 524 21 51, 524 21 52, 524 21 53, 524 21 54, 524 21 55, 524 21 56, 524 21 57, 524 21 58, 524 21 59, 524 21 60, 524 21 61, 524 21 62, 524 21 63, 524 21 64, 524 21 65, 524 21 66, 524 21 67, 524 21 68, 524 21 69, 524 21 70, 524 21 71, 524 21 72, 524 21 73, 524 21 74, 524 21 75, 524 21 76, 524 21 77, 524 21 78, 524 21 79, 524 21 80, 524 21 81, 524 21 82, 524 21 83, 524 21 84, 524 21 85, 524 21 86, 524 21 87, 524 21 88, 524 21 89, 524 21 90, 524 21 91, 524 21 92, 524 21 93, 524 21 94, 524 21 95, 524 21 96, 524 21 97, 524 21 98, 524 21 99, 524 21 100, 524 21 101, 524 21 102, 524 21 103, 524 21 104, 524 21 105, 524 21 106, 524 21 107, 524 21 108, 524 21 109, 524 21 110, 524 21 111, 524 21 112, 524 21 113, 524 21 114, 524 21 115, 524 21 116, 524 21 117, 524 21 118, 524 21 119, 524 21 120, 524 21 121, 524 21 122, 524 21 123, 524 21 124, 524 21 125, 524 21 126, 524 21 127, 524 21 128, 524 21 129, 524 21 130, 524 21 131, 524 21 132, 524 21 133, 524 21 134, 524 21 135, 524 21 136, 524 21 137, 524 21 138, 524 21 139, 524 21 140, 524 21 141, 524 21 142, 524 21 143, 524 21 144, 524 21 145, 524 21 146, 524 21 147, 524 21 148, 524 21 149, 524 21 150, 524 21 151, 524 21 152, 524 21 153, 524 21 154, 524 21 155, 524 21 156, 524 21 157, 524 21 158, 524 21 159, 524 21 160, 524 21 161, 524 21 162, 524 21 163, 524 21 164, 524 21 165, 524 21 166, 524 21 167, 524 21 168, 524 21 169, 524 21 170, 524 21 171, 524 21 172, 524 21 173, 524 21 174, 524 21 175, 524 21 176, 524 21 177, 524 21 178, 524 21 179, 524 21 180, 524 21 181, 524 21 182, 524 21 183, 524 21 184, 524 21 185, 524 21 186, 524 21 187, 524 21 188, 524 21 189, 524 21 190, 524 21 191, 524 21 192, 524 21 193, 524 21 194, 524 21 195, 524 21 196, 524 21 197, 524 21 198, 524 21 199, 524 21 200, 524 21 201, 524 21 202, 524 21 203, 524 21 204, 524 21 205, 524 21 206, 524 21 207, 524 21 208, 524 21 209, 524 21 210, 524 21 211, 524 21 212, 524 21 213, 524 21 214, 524 21 215, 524 21 216, 524 21 217, 524 21 218, 524 21 219, 524 21 220, 524 21 221, 524 21 222, 524 21 223, 524 21 224, 524 21 225, 524 21 226, 524 21 227, 524 21 228, 524 21 229, 524 21 230, 524 21 231, 524 21 232, 524 21 233, 524 21 234, 524 21 235, 524 21 236, 524 21 237, 524 21 238, 524 21 239, 524 21 240, 524 21 241, 524 21 242, 524 21 243, 524 21 244, 524 21 245, 524 21 246, 524 21 247, 524 21 248, 524 21 249, 524 21 250, 524 21 251, 524 21 252, 524 21 253, 524 21 254, 524 21 255, 524 21 256, 524 21 257, 524 21 258, 524 21 259, 524 21 260, 524 21 261, 524 21 262, 524 21 263, 524 21 264, 524 21 265, 524 21 266, 524 21 267, 524 21 268, 524 21 269, 524 21 270, 524 21 271, 524 21 272, 524 21 273, 524 21 274, 524 21 275, 524 21 276, 524 21 277, 524 21 278, 524 21 279, 524 21 280, 524 21 281, 524 21 282, 524 21 283, 524 21 284, 524 21 285, 524 21 286, 524 21 287, 524 21 288, 524 21 289, 524 21 290, 524 21 291, 524 21 292, 524 21 293, 524 21 294, 524 21 295, 524 21 296, 524 21 297, 524 21 298, 524 21 299, 524 21 300, 524 21 301, 524 21 302, 524 21 303, 524 21 304, 524 21 305, 524 21 306, 524 21 307, 524 21 308, 524 21 309, 524 21 310, 524 21 311, 524 21 312, 524 21 313, 524 21 314, 524 21 315, 524 21 316, 524 21 317, 524 21 318, 524 21 319, 524 21 320, 524 21 321, 524 21 322, 524 21 323, 524 21 324, 524 21 325, 524 21 326, 524 21 327, 524 21 328, 524 21 329, 524 21 330, 524 21 331, 524 21 332, 524 21 333, 524 21 334, 524 21 335, 524 21 336, 524 21 337, 524 21 338, 524 21 339, 524 21 340, 524 21 341, 524 21 342, 524 21 343, 524 21 344, 524 21 345, 524 21 346, 524 21 347, 524 21 348, 524 21 349, 524 21 350, 524 21 351, 524 21 352, 524 21 353, 524 21 354, 524 21 355, 524 21 356, 524 21 357, 524 21 358, 524 21 359, 524 21 360, 524 21 361, 524 21 362, 524 21 363, 524 21 364, 524 21 365, 524 21 366, 524 21 367, 524 21 368, 524 21 369, 524 21 370, 524 21 371, 524 21 372, 524 21 373, 524 21 374, 524 21 375, 524 21 376, 524 21 377, 524 21 378, 524 21 379, 524 21 380, 524 21 381, 524 21 382, 524 21 383, 524 21 384, 524 21 385, 524 21 386, 524 21 387, 524 21 388, 524 21 389, 524 21 390, 524 21 391, 524 21 392, 524 21 393, 524 21 394, 524 21 395, 524 21 396, 524 21 397, 524 21 398, 524 21 399, 524 21 400, 524 21 401, 524 21 402, 524 21 403, 524 21 404, 524 21 405, 524 21 406, 524 21 407, 524 21 408, 524 21 409, 524 21 410, 524 21 411, 524 21 412, 524 21 413, 524 21 414, 524 21 415, 524 21 416, 524 21 417, 524 21 418, 524 21 419, 524 21 420, 524 21 421, 524 21 422, 524 21 423, 524 21 424, 524 21 425, 524 21 426, 524 21 427, 524 21 428, 524 21 429, 524 21 430, 524 21 431, 524 21 432, 524 21 433, 524 21 434, 524 21 435, 524 21 436, 524 21 437, 524 21 438, 524 21 439, 524 21 440, 524 21 441, 524 21 442, 524 21 443, 524 21 444, 524 21 445, 524 21 446, 524 21 447, 524 21 448, 524 21 449, 524 21 450, 524 21 451, 524 21 452, 524 21 453, 524 21 454, 524 21 455, 524 21 456, 524 21 457, 524 21 458, 524 21 459, 524 21 460, 524 21 461, 524 21 462, 524 21 463, 524 21 464, 524 21 465, 524 21 466, 524 21 467, 524 21 468, 524 21 469, 524 21 470, 524 21 471, 524 21 472, 524 21 473, 524 21 474, 524 21 475, 524 21 476, 524 21 477, 524 21 478, 524 21 479, 524 21 480, 524 21 481, 524 21 482, 524 21 483, 524 21 484, 524 21 485, 524 21 486, 524 21 487, 524 21 488, 524 21 489, 524 21 490, 524 21 491, 524 21 492, 524 21 493, 524 21 494, 524 21 495, 524 21 496, 524 21 497, 524 21 498, 524 21 499, 524 21 500, 524 21 501, 524 21 502, 524 21 503, 524 21 504, 524 21 505, 524 21 506, 524 21 507, 524 21 508, 524 21 509, 524 21 510, 524 21 511, 524 21 512, 524 21 513, 524 21 514, 524 21 515, 524 21 516, 524 21 517, 524 21 518, 524 21 519, 524 21 520, 524 21 521, 524 21 522, 524 21 523, 524 21 524, 524 21 525, 524 21 526, 524 21 527, 524 21 528, 524 21 529, 524 21 530, 524 21 531, 524 21 532, 524 21 533, 524 21 534, 524 21 535, 524 21 536, 524 21 537, 524 21 538, 524 21 539, 524 21 540, 524 21 541, 524 21 542, 524 21 543, 524 21 544, 524 21 545, 524 21 546, 524 21 547, 524 21 548, 524 21 549, 524 21 550, 524 21 551, 524 21 552, 524 21 553, 524 21 554, 524 21 555, 524 21 556, 524 21 557, 524 21 558, 524 21 559, 524 21 560, 524 21 561, 524 21 562, 524 21 563, 524 21 564, 524 21 565, 524 21 566, 524 21 567, 524 21 568, 524 21 569, 524 21 570, 524 21 571, 524 21 572, 524 21 573, 524 21 574, 524 21 575, 524 21 576, 524 21 577, 524 21 578, 524 21 579, 524 21 580, 524 21 581, 524 21 582, 524 21 583, 524 21 584, 524 21 585, 524 21 586, 524 21 587, 524 21 588, 524 21 589, 524 21 590, 524 21 591, 524 21 592, 524 21 593, 524 21 594, 524 21 595, 524 21 596, 524 21 597, 524 21 598, 524 21 599, 524 21 600, 524 21 601, 524 21 602, 524 21 603, 524 21 604, 524 21 605, 524 21 606, 524 21 607, 524 21 608, 524 21 609, 524 21 610, 524 21 611, 524 21 612, 524 21 613, 524 21 614, 524 21 615, 524 21 616, 524 21 617, 524 21 618, 524 21 619, 524 21 620, 524 21 621, 524 21 622, 524 21 623, 524 21 624, 524 21 625, 524 21 626, 524 21 627, 524 21 628, 524 21 629, 524 21 630, 524 21 631, 524 21 632, 524 21 633, 524 21 634, 524 21 635, 524 21 636, 524 21 637, 524 21 638, 524 21 639, 524 21 640, 524 21 641, 524 21 642, 524 21 643, 524 21 644, 524 21 645, 524 21 646, 524 21 647, 524 21 648, 524 21 649, 524 21 650, 524 21 651, 524 21 652, 524 21 653, 524 21 654, 524 21 655, 524 21 656, 524 21 657, 524 21 658, 524 21 659, 524 21 660, 524 21 661, 524 21 662, 524 21 663, 524 21 664, 524 21 665, 524 21 666, 524 21 667, 524 21 668, 524 21 669, 524 21 670, 524 21 671, 524 21 672, 524 21 673, 524 21 674, 524 21 675, 524 21 676, 524 21 677, 524 21 678, 524 21 679, 524 21 680, 524 21 681, 524 21 682, 524 21 683, 524 21 684, 524 21 685, 524 21 686, 524 21 687, 524 21 688, 524 21 689, 524 21 690, 524 21 691, 524 21 692, 524 21 693, 524 21 694, 524 21 695, 524 21 696, 524 21 697, 524 21 698, 524 21 699, 524 21 700, 524 21 701, 524 21 702, 524 21 703, 524 21 704, 524 21 705, 524 21 706, 524 21 707, 524 21 708, 524 21 709, 524 21 710, 524 21 711, 524 21 712, 524 21 713, 524 21 714, 524 21 715, 524 21 716, 524 21 717, 524 21 718, 524 21 719, 524 21 720, 524 21 721, 524 21 722, 524 21 723, 524 21 724, 524 21 725, 524 21 726, 524 21 727, 524 21 728, 524 21 729, 524 21 730, 524 21 731, 524 21 732, 524 21 733, 524 21 734, 524 21 735, 524 21 736, 524 21 737, 524 21 738, 524 21 739, 524 21 740, 524 21 741, 524 21 742, 524 21 743, 524 21 744, 524 21 745, 524 21 746, 524 21 747, 524 21 748, 524 21 749, 524 21 750, 524 21 751, 524 21 752, 524 21 753, 524 21 754, 524 21 755, 524 21 756, 524 21 757, 524 21 758, 524 21 759, 524 21 760, 524 21 761, 524 21 762, 524 21 763, 524 21 764, 524 21 765, 524 21 766, 524 21 767, 524 21 768, 524 21 769, 524 21 770, 524 21 771, 524 21 772, 524 21 773, 524 21 774, 524 21 775, 524 21 776, 524 21 777, 524 21 778, 524 21 779, 524 21 780, 524 21 781, 524 21 782, 524 21 783, 524 21 784, 524 21 785, 524 21 786, 524 21 787, 524 21 788, 524 21 789, 524 21 790, 524 21 791, 524 21 792, 524 21 793, 524 21 794, 524 21 795, 524 21 796, 524 21 797, 524 21 798, 524 21 799, 524 21 800, 524 21 801, 524 21 802, 524 21 803, 524 21 804, 524 21 805, 524 21 806, 524 21 807, 524 21 808, 524 21 809, 524 21 810, 524 21 811, 524 21 812, 524 21 813, 524 21 814, 524 21 815, 524 21 816, 524 21 817, 524 21 818, 524 21 819, 524 21 820, 524 21 821, 524 21 822, 524 21 823, 524 21 824, 524 21 825, 524 21 826, 524 21 827, 524 21 828, 524 21 829, 524 21 830, 524 21 831, 524 21 832, 524 21 833, 524 21 834, 524 21 835, 524 21 836, 524 21 837, 524 21 838, 524 21 839, 524 21 840, 524 21 841, 524 21 842, 524 21 843, 524 21 844, 524 21 845, 524 21 846, 524 21 847, 524 21 848, 524 21 849, 524 21 850, 524 21 851, 524 21 852, 524 21 853, 524 21 854, 524 21 855, 524 21 856, 524 21 857, 524 21 858, 524 21 859, 524 21 860, 524 21 861, 524 21 862, 524 21 863, 524 21 864, 524 21 865, 524 21 866, 524 21 867, 524 21 868, 524 21 869, 524 21 870, 524 21 871, 524 21 872, 524 21 873, 524 21 874, 524 21 875, 524 21 876, 524 21 877, 524 21 878, 524 21 879, 524 21 880, 524 21 881, 524 21 882, 524 21 883, 524 21 884, 524 21 885, 524 21 886, 524 21 887, 524 21 888, 524 21 889, 524 21 890, 524 21 891, 524 21 892, 524 21 893, 524 21 894, 524 21 895, 524 21 896, 524 21 897, 524 21 898, 524 21 899, 524 21 900, 524 21 901, 524 21 902, 524 21 903, 524 21 904, 524 21 905, 524 21 906, 524 21 907, 524 21 908, 524 21 909, 524 21 910, 524 21 911, 524 21 912, 524 21 913, 524 21 914, 524 21 915, 524 21 916, 524 21 917, 524 21 918, 524 21 919, 524 21 920, 524 21 921, 524 21 922, 524 21 923, 524 21 924, 524 21 925, 524 21 926, 524 21 927, 524 21 928, 524 21 929, 524 21 930, 524 21 931, 524 21 932, 524 21 933, 524 21 934, 524 21 935, 524 21 936, 524 21 937, 524 21 938, 524

