


## Screen menu arrangement

The following screens can be selected from the start up screen. Choose the desired screen using the following chart.


Pushing [EXIT/SET] several times returns to the start up screen. See p. 12-3 for set mode arrangement.



### • PSK31 decoder screen (p. 4-21)

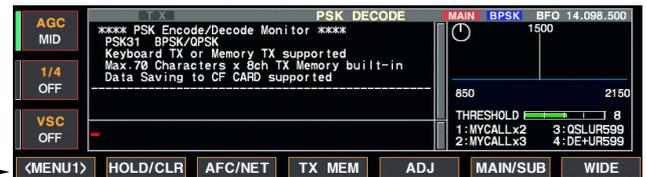

### • Spectrum scope screen (p. 5-2)

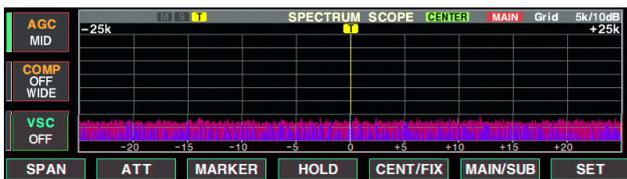


### • Memory channel screen (p. 8-3)



### • Voice recorder screen (p. 7-3)




### • Scan screen (VFO mode; p. 9-4)

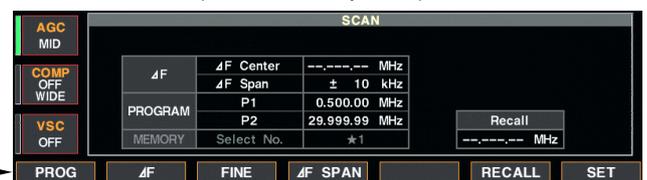

### • Memory keyer screen (CW mode; p. 4-8)



### • Scan screen (Memory mode; p. 9-6)

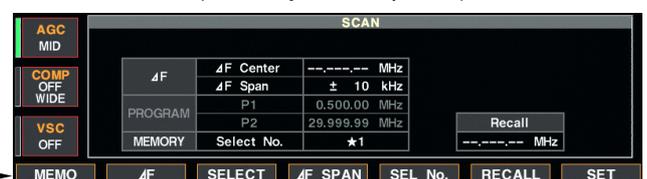

### • RTTY decoder screen (p. 4-13)



### • Set mode menu screen (p. 12-2)




### ◆ Convenient functions for transmit

#### • Break-in function (p. 6-3)

- ➔ Push [VOX/BK-IN] several times to select the break-in OFF, semi break-in and full break-in.
  - “BK IN” or “F-BK IN” appears when the semi break-in or full break-in function is ON, respectively.

### ◆ About CW reverse mode

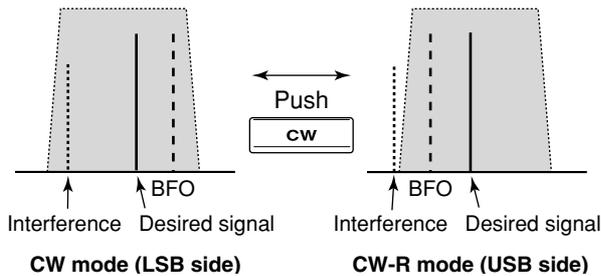


CW-R (CW Reverse) mode uses the opposite side band to receive CW signals.

Use when interfering signals are near a desired signal and you want to use CW-R to reduce the interference.

- ➔ During CW mode, push [CW] to select CW and CW-R mode.

### ◆ About CW pitch control

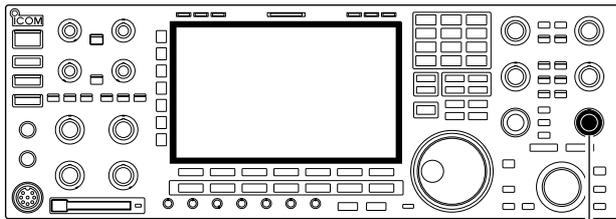


[CW PITCH]

The received CW audio pitch and CW side tone can be adjusted to suit your preference (from 300 to 900 Hz in 5 Hz steps). This does not change the operating frequency.

- ➔ Rotate [CW PITCH] to suit your preference.
  - Adjustable within 300 to 900 Hz in 25 Hz steps.

### ◆ CW side tone function


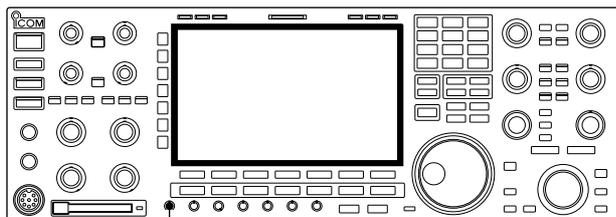


[MONI GAIN]

When the transceiver is in the receive condition (and the break-in function is OFF— p. 6-3) you can listen to the CW side tone without actually transmitting.

This allows you to match your transmit frequency exactly to another station's by matching the audio tone. You can also use the CW side tone (be sure to turn OFF break-in!) to practice CW sending. CW side tone level can be adjusted with [MONI GAIN].

## ■ Operating RTTY (FSK)

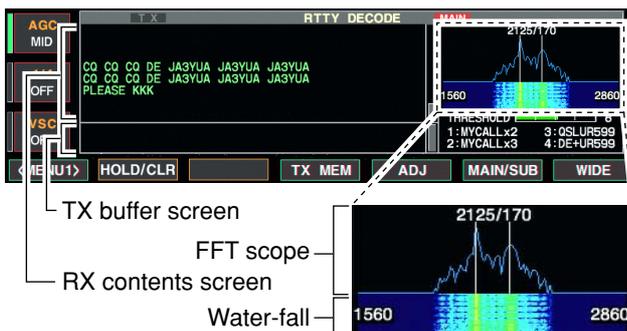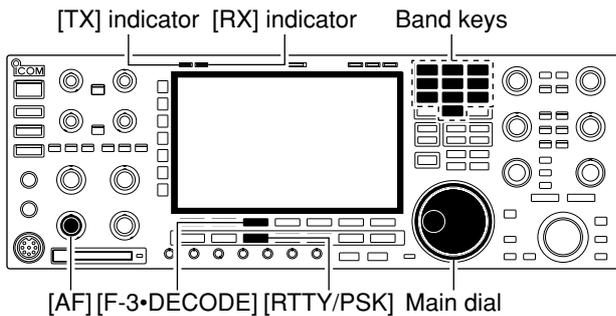

A DSP-based high-quality Baudot RTTY encoder/decoder is built-in to the IC-7800. When connecting a PC keyboard (p. 2-6), RTTY operation can be performed without an external RTTY terminal, TNC or PC.

If you would rather use your RTTY terminal or TNC, consult the manual that comes with the RTTY terminal or TNC.


- ① Push a band key to select the desired band.
- ② Push [RTTY/PSK] to select RTTY.
  - After RTTY mode is selected, push [RTTY/PSK] for 1 sec. to toggle between RTTY and RTTY-R modes.
  - “RTTY” or “RTTY-R” appears.
- ③ Push [F-3•DECODE] to display the decoder screen.
  - The IC-7800 has a built-in Baudot decoder.
- ④ To tune the desired signal, aim for a symmetrical wave form and ensure the peak points align with the mark (2125 Hz) and shift (170 Hz) frequency lines in the FFT scope.
  - The S-meter indicates received signal strength when signal is received.
- ⑤ Press [F12] on the connected keyboard to transmit.
  - [TX] indicator lights red.
- ⑥ Type from the keyboard to enter the contents that you want to transmit.
  - The typewritten contents are indicated in the TX buffer screen and transmitted immediately.
  - The text color will be changed when transmitted.
  - Press one of [F1]–[F8] to transmit the TX memory contents.
- ⑦ Press [F12] on the keyboard to return to receive.

### ✓ For your convenience

The transmission contents can be typed before being transmitted.

- ① Perform the steps ① to ④ above.
- ② Type from the connected keyboard to enter the message that you want to transmit.
  - The typewritten contents are indicated in the TX buffer screen.
- ③ Press [F12] of the connected keyboard to transmit the typewritten contents.
  - The color of displayed text, in the TX buffer screen, will be changed when transmitted.
  - To cancel the transmission, press [F12] twice.
- ④ Press [F12] of the keyboard to return to receive.

### ◆ Functions for the RTTY decoder indication

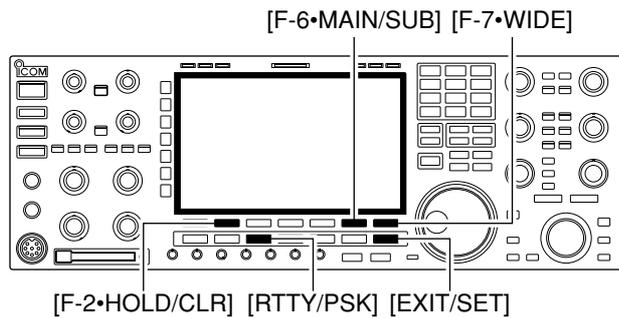

#### • Wide screen indication



### ◆ Setting the decoder threshold level



- ① Push a band key to select the desired band.
- ② Push [RTTY/PSK] to select RTTY.
  - After RTTY mode is selected, push [RTTY/PSK] for 1 sec. to toggle between RTTY and RTTY-R modes.
  - “RTTY” or “RTTY-R” appears.
- ③ Push [F-3•DECODE] to display the decoder screen.
  - When tuned into an RTTY signal, decoded characters are displayed in the RX contents screen.
- ④ Push [F-2•HOLD/CLR] to freeze the current screen.
  - “HOLD” appears while the function is in use.
  - Push [F-2•HOLD/CLR] again to release the function.
- ⑤ Push [F-2•HOLD/CLR] for 1 sec. to clear the displayed characters.
  - “HOLD” indicator disappears at the same time when the hold function is in use.
- ⑥ Push [F-7•WIDE] to toggle the RTTY decode screen size from normal and wide.
  - S/R/F meter type during wide screen indication can be selected in display set mode. (pgs. 3-11, 12-11)
- ⑦ Push [F-6•MAIN/SUB] to toggle the MAIN and SUB band for decode operation.
  - Dualwatch function (p. 5-16) should be ON when SUB band is selected for decode operation.
- ⑧ Push [EXIT/SET] to close the RTTY decode screen.


Adjust the RTTY decoder threshold level if some characters are displayed when no signal is received.

- ① Select the RTTY decoder screen as described above.
- ② Push [F-5•ADJ] to select the threshold level setting condition.
- ③ Rotate the main dial to adjust the RTTY decoder threshold level.
  - Push [F-6•DEF] for 1 sec. to select the default setting.
- ④ Push [F-5•ADJ] to exit from the threshold level setting condition.

▨ The UnShift On Space (USOS) function and new line code can be set in the RTTY set mode. (p. 4-18)

4 RECEIVE AND TRANSMIT

◇ RTTY decode set mode

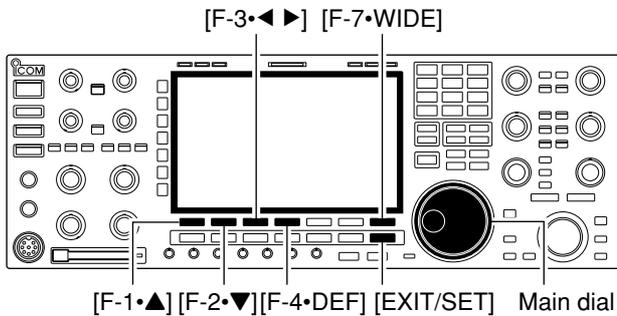

This set mode is used to set the decode USOS function, time stamp setting, etc.

• Setting contents

- ① During RTTY mode operation, push [F-3•DECODE] to select RTTY decode screen.
- ② Push [F-1•<MENU2>] to select RTTY decode menu 2, then push [F-6•SET] to select RTTY decode set mode.
  - Push [F-7•WIDE] to toggle the screen size from normal and wide.
- ③ Push [F-1•▲] or [F-2•▼] to select the desired set item.
- ④ Set the desired condition using the main dial.
  - Push [F-4•DEF] for 1 sec. to select a default condition or value.
  - Push [F-3•◀▶] to select the set contents for some items.
- ⑤ Push [EXIT/SET] to exit from set mode.

• RTTY decode set mode screen



<b>RTTY FFT Scope Averaging</b>	<b>OFF</b>
Set the FFT scope waveform averaging function from 2 to 4 and OFF. (default: OFF)	<b>Recommendation!</b> If you use the FFT scope waveform for tuning, use the default or smaller number setting is recommended.

<b>RTTY FFT Scope Waveform Color</b>	
Set the color for the FFT scope waveform.	<ul style="list-style-type: none"> <li>• The color is set in RGB format.</li> <li>• The set color is indicated in the box beside the RGB scale.</li> </ul>
<ul style="list-style-type: none"> <li>• Push [F-3•◀▶] to select R (Red), G (Green) and B (Blue), and then rotate the main dial to set the ratio from 0 to 255.</li> </ul>	

<b>RTTY Decode USOS</b>	<b>ON</b>
Turn the letter code decoding after receiving a “space” (USOS; UnShift On Space function) capability ON and OFF.	<ul style="list-style-type: none"> <li>• ON : Decode as letter code.</li> <li>• OFF : Decode as character code.</li> </ul>



<b>RTTY Decode New Line Code</b>	<b>CR,LF,CR+LF</b>
Selects the new line code of the internal RTTY decoder. CR: Carriage Return, LF: Line Feed	<ul style="list-style-type: none"> <li>• CR,LF,CR;LF : Makes new line with any codes.</li> <li>• CR+LF : Makes new line with CR+LF code only.</li> </ul>

<b>RTTY Diddle</b>	<b>BLANK</b>
Selects the diddle condition.	<ul style="list-style-type: none"> <li>• BLANK : Transmits blank code during no code transmission.</li> <li>• LTRS : Transmits letter code during no code transmission.</li> <li>• OFF : Turns the diddle function OFF.</li> </ul>


### ◇ RTTY decode set mode (continued)

<b>RTTY TX USOS</b> Explicitly inserts the FIGS character even though it is not required by the receiving station.	<b>ON</b> <ul style="list-style-type: none"> <li>• ON : Inserts FIGS.</li> <li>• OFF : Does not insert FIGS.</li> </ul>
<b>RTTY Time Stamp</b> Turn the time stamp (date, transmission or reception time) indication ON and OFF.	<b>ON</b> <ul style="list-style-type: none"> <li>• ON : Displays the time stamp.</li> <li>• OFF : No time stamp indication.</li> </ul>
<b>RTTY Auto CR+LF by TX</b> Selects the automatic new line code (CR+LF) transmission capability.	<b>ON</b> <ul style="list-style-type: none"> <li>• ON : Transmits CR+LF code once.</li> <li>• OFF : Transmits no CR+LF code.</li> </ul>
<b>RTTY Time Stamp (Time)</b> Selects the clock indication for time stamp usage. <b>NOTE:</b> The time won't be displayed when "OFF" is selected in "RTTY Time Stamp" as above.	<b>Local</b> <ul style="list-style-type: none"> <li>• Local : Selects the time that set in "Time (Now)."</li> <li>• UTC* : Selects the time that set in "CLOCK2."</li> </ul> <p>*The name of choice may differ according to "CLOCK2 Name" setting (p, 11-2). "UTC" is the default name of CLOCK2.</p>
<b>RTTY Time Stamp (Frequency)</b> Selects the operating frequency indication for time stamp usage. <b>NOTE:</b> The frequency won't be displayed when "OFF" is selected in "RTTY Time Stamp" as above.	<b>OFF</b> <ul style="list-style-type: none"> <li>• ON : Displays the operating frequency.</li> <li>• OFF : No operating frequency display.</li> </ul>
<b>RTTY Font Color (Receive)</b> Set the text color for received characters. <ul style="list-style-type: none"> <li>• The color is set in RGB format.</li> <li>• The set color is indicated in the box beside the RGB scale.</li> </ul>	 <ul style="list-style-type: none"> <li>• Push [F-3•◀▶] to select R (Red), G (Green) and B (Blue), and then rotate the main dial to set the ratio from 0 to 255.</li> </ul>
<b>RTTY Font Color (Transmit)</b> Set the text color for transmitted characters. <ul style="list-style-type: none"> <li>• The color is set in RGB format.</li> <li>• The set color is indicated in the box beside the RGB scale.</li> </ul>	 <ul style="list-style-type: none"> <li>• Push [F-3•◀▶] to select R (Red), G (Green) and B (Blue), and then rotate the main dial to set the ratio from 0 to 255.</li> </ul>
<b>RTTY Font Color (Time Stamp)</b> Set the text color for time stamp indication. <ul style="list-style-type: none"> <li>• The color is set in RGB format.</li> <li>• The set color is indicated in the box beside the RGB scale.</li> </ul>	 <ul style="list-style-type: none"> <li>• Push [F-3•◀▶] to select R (Red), G (Green) and B (Blue), and then rotate the main dial to set the ratio from 0 to 255.</li> </ul>
<b>RTTY Font Color (TX Buffer)</b> Set the text color in the TX buffer screen. <ul style="list-style-type: none"> <li>• The color is set in RGB format.</li> <li>• The set color is indicated in the box beside the RGB scale.</li> </ul>	 <ul style="list-style-type: none"> <li>• Push [F-3•◀▶] to select R (Red), G (Green) and B (Blue), and then rotate the main dial to set the ratio from 0 to 255.</li> </ul>

## Operating PSK

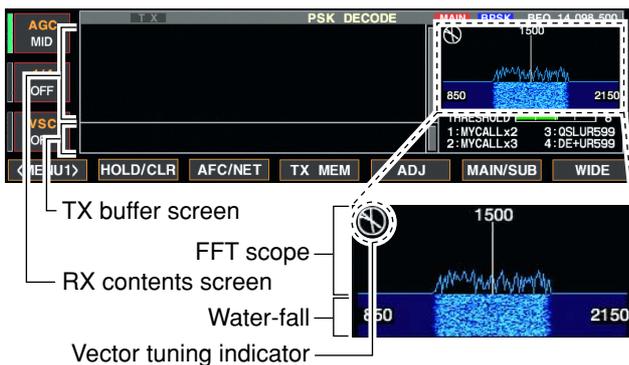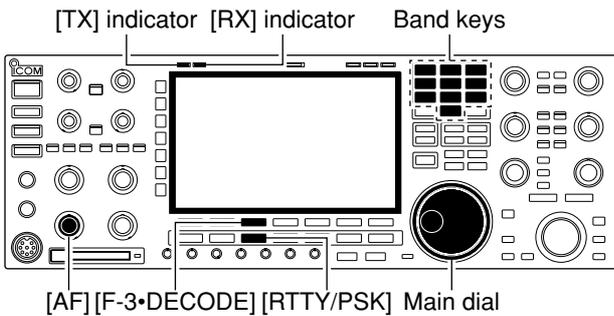

### Vector tuning indicator indication example

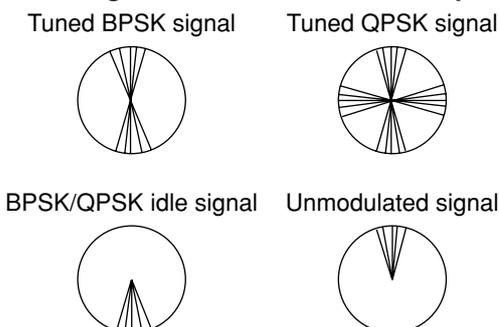

A high-quality DSP-based PSK31 encoder/decoder is built-in to the IC-7800. When connecting a PC keyboard (p. 2-6), PSK31 operation can be performed without PSK software installed on your PC.

If desired, you can also use your PSK software; consult the manual that comes with the software.


- ① Push a band key to select the desired band.
- ② Push [RTTY/PSK] to select PSK.
  - After PSK mode is selected, push [RTTY/PSK] for 1 sec. to toggle between PSK and PSK-R modes.
  - “PSK” or “PSK-R” appears.
- ③ Push [F-3•DECODE] to displays the decoder screen.
  - The IC-7800 has a built-in PSK31 decoder.
- ④ Tune the desired signal with the main dial.
  - The signal is properly tuned when the radiated lines in the vector tuning indicator narrow, as show in the example below.
  - The radiated lines in the vector tuning indicator may be displayed sporadically.
  - When a PSK signal is received, the water-fall display is activated.
  - The water-fall display shows the signal condition within the passband and a vertical line appears when a PSK signal is received.
- ⑤ Press [F12] of the connected keyboard to transmit.
  - [TX] indicator lights red.
- ⑥ Type from the connected keyboard to enter the message that you want to transmit.
  - The typewritten contents are indicated in the TX buffer screen and transmitted immediately.
  - The text color will be changed when transmitted.
  - Press one of [F1]–[F8] to transmit the TX memory contents.
- ⑦ Press [F12] of the keyboard to return to receive.

### ✓ For your convenience

The transmission contents can be typed before being transmitted.

- ① Perform the steps ① to ④ above.
- ② Type from the connected keyboard to enter the message that you want to transmit.
  - The message is shown in the TX buffer screen.
- ③ Press [F12] of the connected keyboard to transmit the message.
  - The color of displayed text, in the TX buffer screen, will be changed when transmitted.
  - To cancel the transmission, press [F12] twice.
- ④ Press [F12] of the keyboard to return to receive.

◆ Functions for the PSK decoder indication

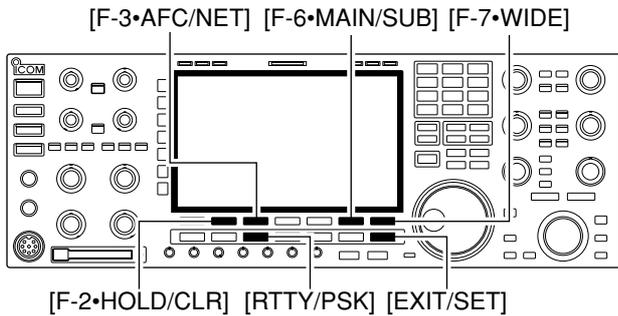

• AFC/NET indications



"AFC" and "NET" indicators      Offset frequency

- ① Push a band key to select the desired band.
  - ② Push [RTTY/PSK] to select PSK.
    - After PSK mode is selected, push [RTTY/PSK] for 1 sec. to toggle between PSK and PSK-R modes.
    - "PSK" or "PSK-R" appears.
  - ③ Push [F-3•DECODE] to display the decoder screen.
    - When tuned into a PSK signal, decoded characters are displayed in the RX contents screen.
  - ④ Push [F-2•HOLD/CLR] to freeze the current screen.
    - "HOLD" appears while the function is in use.
    - Push [F-2•HOLD/CLR] again to release the function.
  - ⑤ Push [F-2•HOLD/CLR] for 1 sec. to clear the displayed characters.
    - "HOLD" indicator disappears at the same time when the hold function is in use.
  - ⑥ Push [F-3•AFC/NET] to turn the AFC function ON.
    - "AFC" appears.
    - If a PSK signal is received within the AFC tuning range, the decoder automatically tunes into the signal and the offset frequency is displayed.
    - The AFC tuning range is set to ±15 Hz as the default. Optional ±8 Hz setting is available in PSK decode set mode. (p. 2)
- NOTE:** The AFC function may not tune the signal properly when a weak PSK signal is received.
- ⑦ Push [F-3•AFC/NET] again to turn the NET function ON.
    - "NET" appears additionally.
  - ⑧ Push [F-3•AFC/NET] for 1 sec. to add the offset frequency to the displayed frequency.
  - ⑨ Push [F-7•WIDE] to toggle the PSK decode screen size from normal and wide.
    - S/Rf meter type during wide screen indication can be selected in display set mode. (pgs. 3-11, 12-11)
  - ⑩ Push [F-6•MAIN/SUB] to toggle the MAIN and SUB band for decode operation.
    - Dualwatch function (p. 5-16) should be ON when SUB band is selected for decode operation.
  - ⑪ Push [EXIT/SET] to close the PSK decode screen.

◆ Setting the decoder threshold level



Adjust the PSK decoder threshold level if some characters are displayed when no signal is received.

- ① Call up the PSK decoder screen as described above.
- ② Push [F-5•ADJ] to select the threshold level setting condition.
- ③ Rotate the main dial to adjust the PSK decoder threshold level.
  - Push [F-6•DEF] for 1 sec. to select the default setting.
- ④ Push [F-5•ADJ] to exit from the threshold level setting condition.


4 RECEIVE AND TRANSMIT

◇ PSK decode set mode

This set mode is used to set the decode USOS function, time stamp setting, etc.

• Setting contents

- ① During PSK mode operation, push [F-3•DECODE] to select PSK decode screen.
- ② Push [F-1•<MENU2>] to select PSK decode menu 2, then push [F-6•SET] to select PSK decode set mode.
  - Push [F-7•WIDE] to toggle the screen size from normal and wide.
- ③ Push [F-1•▲] or [F-2•▼] to select the desired set item.
- ④ Set the desired condition using the main dial.
  - Push [F-4•DEF] for 1 sec. to select a default condition or value.
  - Push [F-3•◀▶] to select the set contents for some items.
- ⑤ Push [EXIT/SET] to exit from set mode.

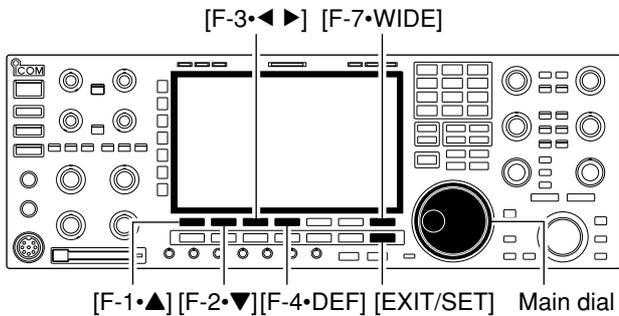

<b>PSK FFT Scope Averaging</b>	<b>OFF</b>
Set the FFT scope waveform averaging function from 2 to 4 and OFF. (default: OFF)	<b>Recommendation!</b> If you use the FFT scope waveform for tuning, using the default or smaller number setting is recommended.

<b>PSK FFT Scope Waveform Color</b>	
Set the color for the FFT scope waveform. <ul style="list-style-type: none"> <li>• The color is set in RGB format.</li> <li>• The set color is indicated in the box beside the RGB scale.</li> </ul>	<ul style="list-style-type: none"> <li>• Push [F-3•◀▶] to select R (Red), G (Green) and B (Blue), and then rotate the main dial to set the ratio from 0 to 255.</li> </ul>

<b>PSK AFC Range</b>	<b>±15Hz</b>
Select the AFC (Automatic Frequency Control) function operating range from ±15 Hz (default) and ±8 Hz.	<b>NOTE:</b> The AFC function may not tune the signal properly when a weak PSK signal is received.

<b>PSK Time Stamp</b>	<b>ON</b>
Turn the time stamp (date, transmission or reception time) display ON and OFF.	<ul style="list-style-type: none"> <li>• ON : Displays the time stamp.</li> <li>• OFF : No time stamp display.</li> </ul>

<b>PSK Time Stamp (Time)</b>	<b>Local</b>
Selects the clock display for time stamp usage.	<ul style="list-style-type: none"> <li>• Local : Selects the time that set in “Time (Now).”</li> <li>• UTC* : Selects the time that set in “CLOCK2.”</li> </ul> <p>*The name of choice may differ according to “CLOCK2 Name” setting (p, 11-2). “UTC” is the default name of CLOCK2.</p>
<b>NOTE:</b> The time won't be displayed when “OFF” is selected in “PSK Time Stamp” as above.	

### ◇ PSK decode set mode (continued)

#### PSK Time Stamp (Frequency)


OFF

Selects the operating frequency display for time stamp usage.

- ON : Displays the operating frequency.
- OFF : No operating frequency display.

**NOTE:** The frequency won't be displayed when "OFF" is selected in "PSK Time Stamp" as below left.

#### PSK Font Color (Receive)



Set the text color for received characters.

- The color is set in RGB format.
- The set color is indicated in the box beside the RGB scale.
- Push [F-3•◀▶] to select R (Red), G (Green) and B (Blue), and then rotate the main dial to set the ratio from 0 to 255.

#### PSK Font Color (Transmit)



Set the text color for transmitted characters.

- The color is set in RGB format.
- The set color is indicated in the box beside the RGB scale.
- Push [F-3•◀▶] to select R (Red), G (Green) and B (Blue), and then rotate the main dial to set the ratio from 0 to 255.

#### PSK Font Color (Time Stamp)



Set the text color for time stamp indication.

- The color is set in RGB format.
- The set color is indicated in the box beside the RGB scale.
- Push [F-3•◀▶] to select R (Red), G (Green) and B (Blue), and then rotate the main dial to set the ratio from 0 to 255.

#### PSK Font Color (TX Buffer)



Set the text color in the TX buffer screen.

- The color is set in RGB format.
- The set color is indicated in the box beside the RGB scale.
- Push [F-3•◀▶] to select R (Red), G (Green) and B (Blue), and then rotate the main dial to set the ratio from 0 to 255.


◇ Screen arrangement



• Display set mode (p. 12-11)



• Set mode menu screen (p. 12-2)

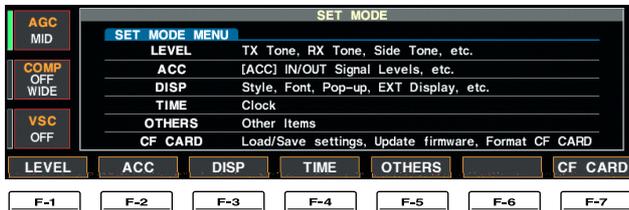


• Time set mode (p. 11-2)



• Level set mode (p. 12-4)



• Miscellaneous (Others) set mode (p. 12-14)

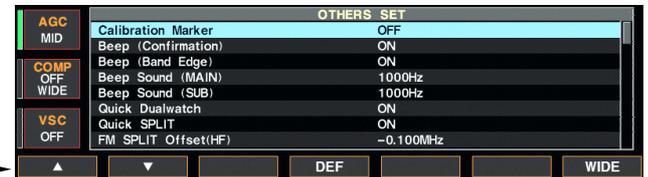

• ACC set mode (p. 12-6)



• CF card set menu (p. 12-22)



F-2 F-7

## ■ Level set mode (continued)

**FM RX Tone (Bass)**

 0

Sets the bass level of the receive audio tone in FM mode from -5 to +5. (default: 0)

**FM RX Tone (Treble)**

 0

Sets the treble level of the receive audio tone in FM mode from -5 to +5. (default: 0)

**SSB TBW (WIDE)**

100 - 2900

Sets the transmission passband width to wide setting by changing the lower and higher cut-off frequencies.

Lower freq. : 100 (default), 200, 300 and 500 Hz  
Higher freq.: 2500, 2700, 2800 and 2900 Hz (default)

**SSB TBW (MID)**

300 - 2700

Sets the transmission passband width to middle setting by changing the lower and higher cut-off frequencies.

Lower freq. : 100, 200, 300 (default) and 500 Hz  
Higher freq.: 2500, 2700 (default), 2800 and 2900 Hz

**SSB TBW (NAR)**

500 - 2500

Sets the transmission passband width to narrow setting by changing the lower and higher cut-off frequencies.

Lower freq. : 100, 200, 300 and 500 Hz (default)  
Higher freq.: 2500 (default), 2700, 2800 and 2900 Hz

**Speech Level**

 50%

Sets the voice synthesizer audio output level from 0 to 100% in 1% steps. (default: 50%)

**Side Tone Level**

 50%

Sets the side tone output level from 0 to 100% in 1% steps. (default: 50%)

**Side Tone Level Limit**

ON

Turns the side tone output level limiting capability from ON and OFF. (default: ON)

**Beep Level**

 50%

Sets the key-touch beep output level from 0 to 100% in 1% steps. (default: 50%)

**Beep Level Limit**

ON

Turns the key-touch beep output level limiting capability from ON and OFF. (default: ON)


## ■ Display set mode

### LCD Unit Bright

 50%

Adjusts the LCD unit brightness from 0 (dark) to 100% (bright) range in 1% steps. (default: 50%)

### Backlight (Switches)

 80

Adjusts the switch indicators brightness from 1 (dark) to 100 (bright) range in 1 steps. (default: 80)

### Display Type

A

Selects the desired display type from A, B and C. (default: A)

### Display Font

Italic (1)

Selects the desired font for frequency readout from Italic (1), Italic (2), Italic (3), Italic (4), Round (1), Round (2), Round (3), Shadow (1), Shadow (2), Shadow (3), Qubic (1), Qubic (2), Qubic (3), Qubic (4), IC-780 (1), IC-780 (2), IC-780 (3) and IC-780 (4). (default: Italic (1))

### Meter Response

MID

Set meter needle response from SLOW, MID and FAST. (default: MID)

This setting is effective for the standard and edge-wise meter type selections only.

### Text Font

Normal

Selects the desired font for the displays other than frequency readout from Normal and Slim. (default: Normal)

### Meter Type (Normal Screen)

Standard

Selects the desired S/RF meter type during normal screen indication from Standard, Edgewise and Bar. (default: Standard)

### Meter Type (Wide Screen)

Edgewise

Selects the desired S/RF meter type during wide screen or mini scope indication from Edgewise and Bar. (default: Edgewise)

### Meter Peak Hold (Bar)

ON

Turns the meter peak hold function ON and OFF. (default: ON)  
This function is used for the bar meter only.




## 12 SET MODE

## ■ Display set mode (continued)

<p><b>Memory Name</b> <span style="float: right;"><b>ON</b></span></p> <p>Sets the memory name indication, during memory mode operation, ON and OFF. (default: ON)</p>	<ul style="list-style-type: none"> <li>• ON : The programmed memory name is displayed above the frequency indication.</li> <li>• OFF : No memory name is displayed even a memory name is programmed.</li> </ul>
<p><b>APF-Width Popup (APF OFF→ON)</b> <span style="float: right;"><b>ON</b></span></p> <p>Selects the pop-up display for the APF filter width from ON and OFF. (default: ON)</p>	
<p><b>MN-Q Popup (MN OFF→ON)</b> <span style="float: right;"><b>ON</b></span></p> <p>Turns the pop-up indication capability when the notch filter width is changed from ON to OFF. (default: ON)</p>	
<p><b>Screen Saver Function</b> <span style="float: right;"><b>60min</b></span></p> <p>Turns the screen saver function ON (15, 30 or 60 minutes) and OFF. (default: 60 min.)</p>	<p>The screen saver will acts when no operation is performed for the selected time period to protect the LCD from the "burn-in" effect.</p>
<p><b>Screen Saver Type</b> <span style="float: right;"><b>Bound</b></span></p> <p>Selects the screen saver type from "Bound," "Rotation" and "Twist." (default: Bound)</p>	<p>The screen saver indication can be displayed for your reference while pushing and holding [F-5•PREVIEW].</p>
<p><b>External Display</b> <span style="float: right;"><b>OFF</b></span></p> <p>Select "ON" when the external display is connected. (default: OFF)</p>	<ul style="list-style-type: none"> <li>• At least 800×600 pixel resolution is required for the display.</li> </ul>
<p><b>External Display Sync Pulse</b> <span style="float: right;"><b>H</b></span></p> <p>Selects the suitable pulse level for the connected external display from H and L. (default: H)</p>	
<p><b>Opening Message</b> <span style="float: right;"><b>ON</b></span></p> <p>Turns the opening message screen indication capability ON and OFF. (default: ON)</p>	

# 13 MAINTENANCE

## SWR reading

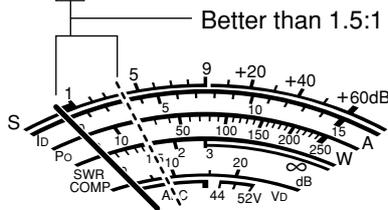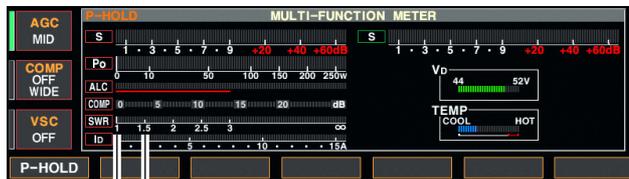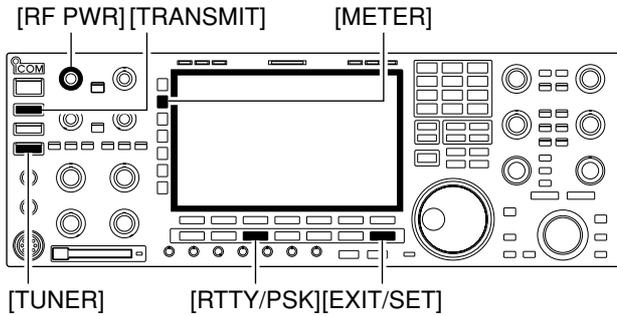

The SWR meter indicates the SWR over the transmission line in all modes.

- ① Push [TUNER] to turn the antenna tuner OFF.
- ② Push [METER] for 1 sec. to display multi-function meter.
- ③ Push [RTTY/PSK] once or twice to select RTTY mode.
- ④ Push [TRANSMIT].
- ⑤ Rotate [RF PWR] clockwise past the 12 o'clock position for more than 30 W output power.
- ⑥ Read the SWR on the SWR meter gage.
- ⑦ Push [EXIT/SET] to close multi-function meter.

▨ The built-in antenna tuner matches the transmitter to the antenna when the SWR is lower than 3 : 1.

## Screen type and font selections

### • Screen image example— type C



3 types of screen images and 18 types of frequency readout indication fonts are available in the IC-7800.

- ① Push [EXIT/SET] several times to close multi-function screen, if necessary.
- ② Push [F-7•SET] to select set mode menu screen.
- ③ Push [F-3•DISP] to enter display set mode.
- ④ Push [F-1•▲] or [F-2•▼] to select “Display Type” item when selecting the screen image, select “Display Font” when selecting the frequency readout indication font.
- ⑤ Rotate the main dial to select the desired screen image or font.
  - Screen image is selectable from A, B and C.
  - Italic (1)/(2)/(3)/(4), Round (1)/(2)/(3), Shadow (1)/(2)/(3), Qubic (1)/(2)/(3)/(4) and IC-780 (1)/(2)/(3)/(4) are available for the frequency readout font.
- ⑥ Push [EXIT/SET] twice to exit from display set mode.

## ◇ Command table

Command	Sub command	Description
00	—	Send frequency data
01	Same as command 06	Send mode data
02	—	Read band edge frequencies
03	—	Read operating frequency
04	—	Read operating mode
05	—	Set operating frequency
06	00 01 02 03 04 05 07 08 12 13	Select LSB Select USB Select AM Select CW Select RTTY Select FM Select CW-R Select RTTY-R Select PSK Select PSK-R
07	— B0 B1 C0 C1 D0 D1	Select VFO mode Exchange main and sub bands Equalize main and sub bands Turn the dualwatch OFF Turn the dualwatch ON Select main band Select sub band
08	— 0001–0101*	Select memory mode Select memory channel *P1=0100, P2=0101
09	—	Memory write
0A	—	Memory to VFO
0B	—	Memory clear
0E	00 01 02 03 12 13 22 23 A1–A7 B0 B1 B2 D0 D3	Scan stop Programmed/memory scan start Programmed scan start $\Delta$ F scan start Fine programmed scan start Fine $\Delta$ F scan start Memory scan start Select memory scan start Set $\Delta$ F scan span (A1= $\pm$ 5 kHz; A2= $\pm$ 10 kHz; A3= $\pm$ 20 kHz; A4= $\pm$ 50 kHz; A5= $\pm$ 100 kHz; A6= $\pm$ 500 kHz; A7= $\pm$ 1 MHz) Set as non-select channel Set as select channel (1= $\star$ 1; 2= $\star$ 2; 3= $\star$ 3; when no data com- mand is specified, the previously set number or " $\star$ 1" is selected) Set the number for select memory scan (0=ALL; 1= $\star$ 1; 2= $\star$ 2; 3= $\star$ 3) Set scan resume OFF Set scan resume ON
0F	00 01	Turn the split function OFF Turn the split function ON
10	00 01 02 03 04 05 06 07 08	Select 10 Hz (1 Hz) tuning step Select 100 Hz tuning step Select 1 kHz tuning step Select 5 kHz tuning step Select 9 kHz tuning step Select 10 kHz tuning step Select 12.5 kHz tuning step Select 20 kHz tuning step Select 25 kHz tuning step

Command	Sub command	Description
11	—	Select/read attenuator (0=OFF; 1=3 dB; 2=6 dB; 3=9 dB; 4=12 dB; 5=15 dB; 6=18 dB; 7=21 dB)
12	00 + RX ANT 01 + RX ANT 02 + RX ANT 03 + RX ANT	Select/read ANT1 selection (00=RX ANT OFF; 01=RX ANT ON) Select/read ANT2 selection (00=RX ANT OFF; 01=RX ANT ON) Select/read ANT3 selection (00=RX ANT OFF; 01=RX ANT ON) Select/read ANT4 selection (00=RX ANT OFF; 01=RX ANT ON)
13	00 01 02	Announce with voice synthesizer (00=all data; 01=frequency and S-meter level; 02=receive mode)
14	01 + Level data 02 + Level data 03 + Level data 05 + Level data 06 + Level data 07 + Level data 08 + Level data 09 + Level data 0A + Level data 0B + Level data 0C + Level data 0D + Level data 0E + Level data 0F + Level data 11 + Level data 12 + Level data 13 + Level data 14 + Level data 15 + Level data 16 + Level data 17 + Level data 18 + Level data 19 + Level data	[AF] level setting (0=max. CCW to 255=max. CW) [RF] level setting (0=max. CCW to 255=11 o'clock) [SQL] level setting (0=11 o'clock to 255=max. CW) [APF] level setting (0=Pitch–550 Hz, 128=Pitch, 255=Pitch+550 Hz; 10 Hz steps) [NR] level setting (0=min. to 255=max.) Inside [TWIN PBT] setting or IF shift setting (0=max. CCW, 128=center, 255=max. CW) Outside [TWIN PBT] setting (0=max. CCW, 128=center, 255=max. CW) [CW PITCH] setting (0=300 Hz, 128=600 Hz, 255=900 Hz; 5 Hz steps) [RF POWER] setting (0=max. CCW to 255=max. CW) [MIC] setting (0=max. CCW to 255=max. CW) [KEY SPEED] setting (0=max. CCW to 255=max. CW) [NOTCH] setting (0=low freq. to 255=high freq.) [COMP] setting (0=max. CCW to 255=max. CW) [DELAY] setting (0=max. CCW to 255=max. CW) [AGC] control setting (0=max. CCW to 255=max. CW) [NB] control setting (0=max. CCW to 255=max. CW) [DIGI-SEL] setting (0=max. CCW to 255=max. CW) [DRIVE] setting (0=max. CCW to 255=max. CW) [MONI GAIN] setting (0=max. CCW to 255=max. CW) [VOX GAIN] setting (0=max. CCW to 255=max. CW) [ANTI VOX] setting (0=max. CCW to 255=max. CW) [CONTRAST] setting (0=max. CCW to 255=max. CW) [BRIGHT] setting (0=max. CCW to 255=max. CW)

## ◇ Command table (continued)

Command	Sub command	Description	Command	Sub command	Description
1A	050134	Send/read voice memory short play time (3=3 sec. to 10=10 sec.)	1A	050164	Send/read scan speed (0=Low, 1=High)
	050135	Send/read voice memory normal record time (5= 5 sec. to 15=15 sec.)		050165	Send/read scan resume (0=OFF, 1=ON)
	050136	Send/read contest number style (0=Normal, 1=190→ANO, 2=190→ANT, 3=90→NO, 4=90→NT)		050166	Send/read antenna selection for 0.03 to 1.60 MHz band (see p. 14-10 for details)
	050137	Send/read count up trigger channel (1=M1, 2=M2, 3=M3, 4=M4)		050167	Send/read antenna selection for 1.60 to 2.00 MHz band (see p. 14-10 for details)
	050138	Send/read present number (1-9999)		050168	Send/read antenna selection for 2.00 to 6.00 MHz band (see p. 14-10 for details)
	050139	Send/read CW keyer repeat time (1=1 sec. to 60=60 sec.)		050169	Send/read antenna selection for 6.00 to 8.00 MHz band (see p. 14-10 for details)
	050140	Send/read CW keyer dot/dash ratio (28=1:1:2.8 to 45=1:1:4.5)		050170	Send/read antenna selection for 8.00 to 11.00 MHz band (see p. 14-10 for details)
	050141	Send/read rise time (0=2 msec., 1=4 msec., 2=6 msec., 3=8 msec.)		050171	Send/read antenna selection for 11.00 to 15.00 MHz band (see p. 14-10 for details)
	050142	Send/read paddle polarity (0=Normal, 1=Reverse)		050172	Send/read antenna selection for 15.00 to 20.00 MHz band (see p. 14-10 for details)
	050143	Send/read keyer type (0=Straight, 1=Bug-key, 2=ELEC-Key)		050173	Send/read antenna selection for 20.00 to 22.00 MHz band (see p. 14-10 for details)
	050144	Send/read mic. up/down keyer set (0=OFF, 1=ON)		050174	Send/read antenna selection for 22.00 to 26.00 MHz band (see p. 14-10 for details)
	050145	Send/read RTTY decode USOS (0=OFF, 1=ON)		050175	Send/read antenna selection for 26.00 to 30.00 MHz band (see p. 14-10 for details)
	050146	Send/read RTTY decode new line code (0=CR,LF,CR+LF, 1=CR+LF)		050176	Send/read antenna selection for 30.00 to 45.00 MHz band (see p. 14-10 for details)
	050147	Send/read RTTY diddle (0=OFF, 1=Blank, 2=Letter)		050177	Send/read antenna selection for 45.00 to 60.00 MHz band (see p. 14-10 for details)
	050148	Send/read RTTY TX USOS (0=OFF, 1=ON)		050178	Send/read antenna temporary memory set (0=OFF, 1=ON)
	050149	Send/read RTTY auto CR+LF by TX (0=OFF, 1=ON)		050179	Send/read antenna selection (0=OFF, 1=Manual, 2=Auto)
	050150	Send/read RTTY time stamp set (0=OFF, 1=ON)		050180	Send/read usage for ANT2 (0=OFF, 1=TX/RX)
	050151	Send/read clock selection for time stamp (0=Local time, 1=Clock 2)		050181	Send/read usage for ANT3 (0=OFF, 1=TX/RX)
	050152	Send/read frequency stamp (0=OFF, 1=ON)		050182	Send/read usage for ANT4 (0=OFF, 1=TX/RX, 2= RX)
	050153	Send/read received text font color (see p. 14-10 for details)		050183	Send/read VOX delay (0=0.0 sec. to 20=2.0 sec.)
	050154	Send/read transmitted text font color (see p. 14-10 for details)		050184	Send/read VOX voice delay (0=OFF, 1=Short, 2=Long)
	050155	Send/read time stamp text font color (see p. 14-10 for details)		050185	Send/read NB depth (0=1 to 9=10)
	050156	Send/read text font color in TX buffer (see p. 14-10 for details)		050186	Send/read NB width (0=0 to 255=255)
	050157	Send/read PSK time stamp set (0=OFF, 1=ON)		050187	Send/read screen saver set (0=OFF, 1=15 min., 2=30 min., 3=60 min.)
	050158	Send/read clock selection for time stamp (0=Local time, 1=Clock 2)		050188	Set/read screen saver type (0=Bound, 1=Rotation, 2=Twist)
	050159	Send/read frequency stamp (0=OFF, 1=ON)		050189	Set/read meter response setting (0=SLOW, 1=MID, 2=FAST)
	050160	Send/read received text font color (see p. 14-10 for details)			
	050161	Send/read transmitted text font color (see p. 14-10 for details)			
	050162	Send/read time stamp text font color (see p. 14-10 for details)			
	050163	Send/read text font color in TX buffer (see p. 14-10 for details)			

## 14 CONTROL COMMAND

## ◇ Command table (continued)

Command	Sub command	Description
1A	050190	Set/read FFT scope averaging set for RTTY decoder (0=OFF, 1=2, 2=3, 3=4)
	050191	Set/read FFT scope waveform color set for RTTY decoder (see p. 14-10 for details)
	050192	Set/read FFT scope averaging set for PSK decoder (0=OFF, 1=2, 2=3, 3=4)
	050193	Set/read FFT scope waveform color set for PSK decoder (see p. 14-10 for details)
	050194	Set/read PSK AFC function tuning range (0=±8 Hz, 1=±15 Hz)
	06	Send/read DATA mode with filter set (see p. 14-10 for detail)
	07	Send/read SSB transmit bandwidth (0=WIDE, 1=MID, 2=NAR)
	08	Send/read DSP filter shape (0= sharp, 1= soft)
	09	Send/read roofing filter set (0=6 kHz, 1=15 kHz)
	0A	Send/read manual notch width (0=Wide, 1=Mid., 2=Nar.)
	10	Send/read lock function set (0=OFF, 1=ON)
1B	00	Set/read repeater tone frequency (see p. 14-10 for details)
	01	Set/read TSQL tone frequency (see p. 14-10 for details)
1C	00	Set/read the transceiver's condition (0=Rx; 1=Tx)
	01	Set/read antenna tuner condition (0=OFF, 1=ON, 2=Start tuning or while tuning)

