



SERVICE MANUAL

DFC-230

DIGITAL FREQUENCY CONTROLLER



CONTENTS

BLOCK DIAGRAM.....	2
FREQUENCY CHART.....	2
CIRCUIT DESCRIPTION.....	3
DISASSEMBLY.....	9
PACKING.....	9
ADJUSTMENTS.....	10
LOCATION OF ADJUSTMENTS.....	14
PARTS LIST.....	14, 17
PC BOARD VIEW.....	15
SCHEMATIC DIAGRAM.....	16

SPECIFICATIONS

Oscillation	
frequency.....	5.40 ~ 6.10 MHz
Output voltage	0.2V
Frequency stability	1 × 10 ⁻⁵ at room temp. 3 × 10 ⁻⁵ at 0 ~ 50°C
Power requirement ...	DC 9V 30 mA
(Supplied from	DC 13.8V 380 mA
transceiver)	DC 13.8V 10 mA (Memory backup)
Semiconductor	
used.....	CPU 1
	IC 31
	Transistors..... 47
	Diodes..... 64
Dimensions	147(148)W 51(51)H 166(175)D mm (Figures in () include projections.)
Weight	Approx. 1.3 kg

A PRODUCT OF
TRIO-KENWOOD CORPORATION
 6-17, 3-chome, Aobadai, Meguro-ku, Tokyo 153, Japan

TRIO-KENWOOD COMMUNICATIONS, INC.
 1111 West Walnut Street, Compton, California, 90220, U.S.A.
TRIO-KENWOOD COMMUNICATIONS, GmbH
 D-6374 Steinbach TS, Industriestrasse 8A, West Germany
TRIO-KENWOOD (AUSTRALIA) PTY. LTD.
 30 Whiting Street, Artarmon, Sydney N.S.W. Australia 2064

BLOCK DIAGRAM/FREQUENCY CHART

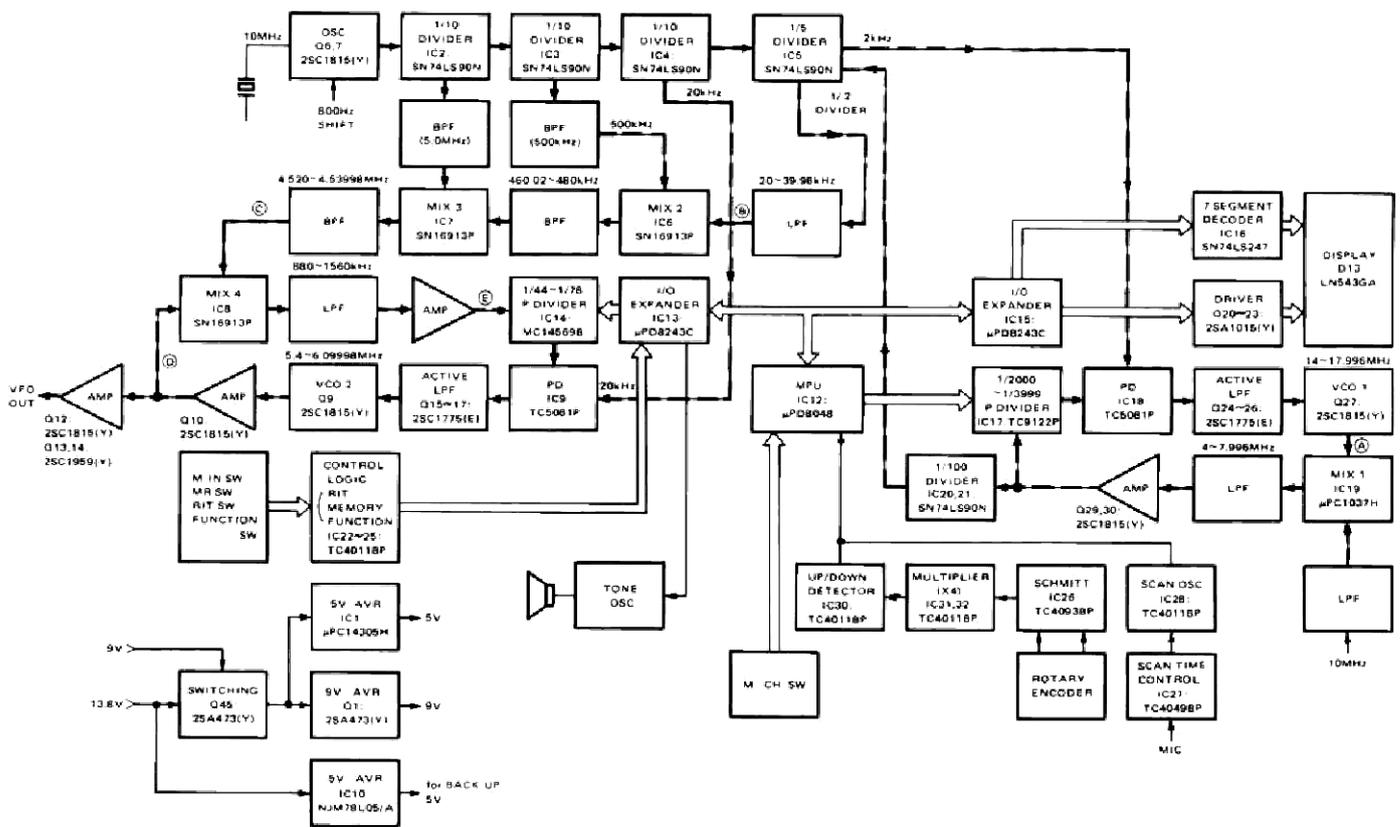


Fig. 1 Block diagram

Refer to Block and Schematic diagram number



Display f.	Output VCO 2 (MHz)	Dividing ratio N	VCO 1 (MHz)	1/200 divider output	MIX4 (IC8) input (MHz)	Dividing ratio 'N'	Dividing ratio N (Binary)	Programmable divider IC14 input (kHz)
900.0 0	5.40000	2000	14.000	20.000	4.520000	44	MSB 0010 1100 LSB	880
999.9 8	5.49998	3998	17.996	39.980	4.539980	48	0011 0000	960
0.0 0	5.50000	2000	14.000	20.000	4.520000	49	0011 0001	980
0.0 2	5.50002	2002	14.004	20.020	4.520020	49	0011 0001	980
0.0 4	5.50004	2004	14.008	20.040	4.520040	49	0011 0001	980
0.0 6	5.50006	2006	14.012	20.060	4.520060	49	0011 0001	980
0.0 8	5.50008	2008	14.016	20.080	4.520080	49	0011 0001	980
0.1 0	5.50010	2010	14.020	20.100	4.520100	49	0011 0001	980
0.2 0	5.50020	2020	14.040	20.200	4.520200	49	0011 0001	980
1.0 0	5.50100	2100	14.200	21.000	4.521000	49	0011 0001	980
10.0 0	5.51000	3000	16.000	30.000	4.530000	49	0011 0001	980
19.9 8	5.51998	3998	17.996	39.980	4.539980	49	0011 0001	980
20.0 0	5.52000	2000	14.000	20.000	4.520000	50	0011 0010	1000
40.0 0	5.54000	2000	14.000	20.000	4.520000	51	0011 0011	1020
60.0 0	5.56000	2000	14.000	20.000	4.520000	52	0011 0100	1040
80.0 0	5.58000	2000	14.000	20.000	4.520000	53	0011 0101	1060
100.0 0	5.60000	2000	14.000	20.000	4.520000	54	0011 0110	1080
200.0 0	5.70000	2000	14.000	20.000	4.520000	59	0011 1011	1180
300.0 0	5.80000	2000	14.000	20.000	4.520000	64	0100 0000	1280
400.0 0	5.90000	2000	14.000	20.000	4.520000	69	0100 0101	1380
500.0 0	6.00000	2000	14.000	20.000	4.520000	74	0100 1010	1480
599.9 8	6.09998	3998	17.996	39.980	4.539980	78	0100 1110	1560
	not displayed							

Table 1. Frequency chart

CIRCUIT DESCRIPTION

The DFC-230 consists of a master oscillator and frequency divider to generate reference signals, two PLL circuits, rotary encoder, waveform shaper, display, and 5V and 9V AVR

circuits. Divide ratio setting, storage, display circuit control, and so forth are accomplished by an 8-bit microprocessor μ PD8048.

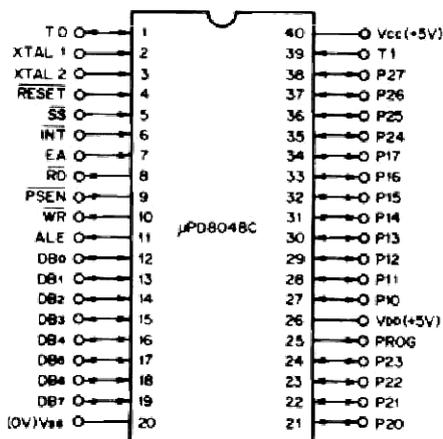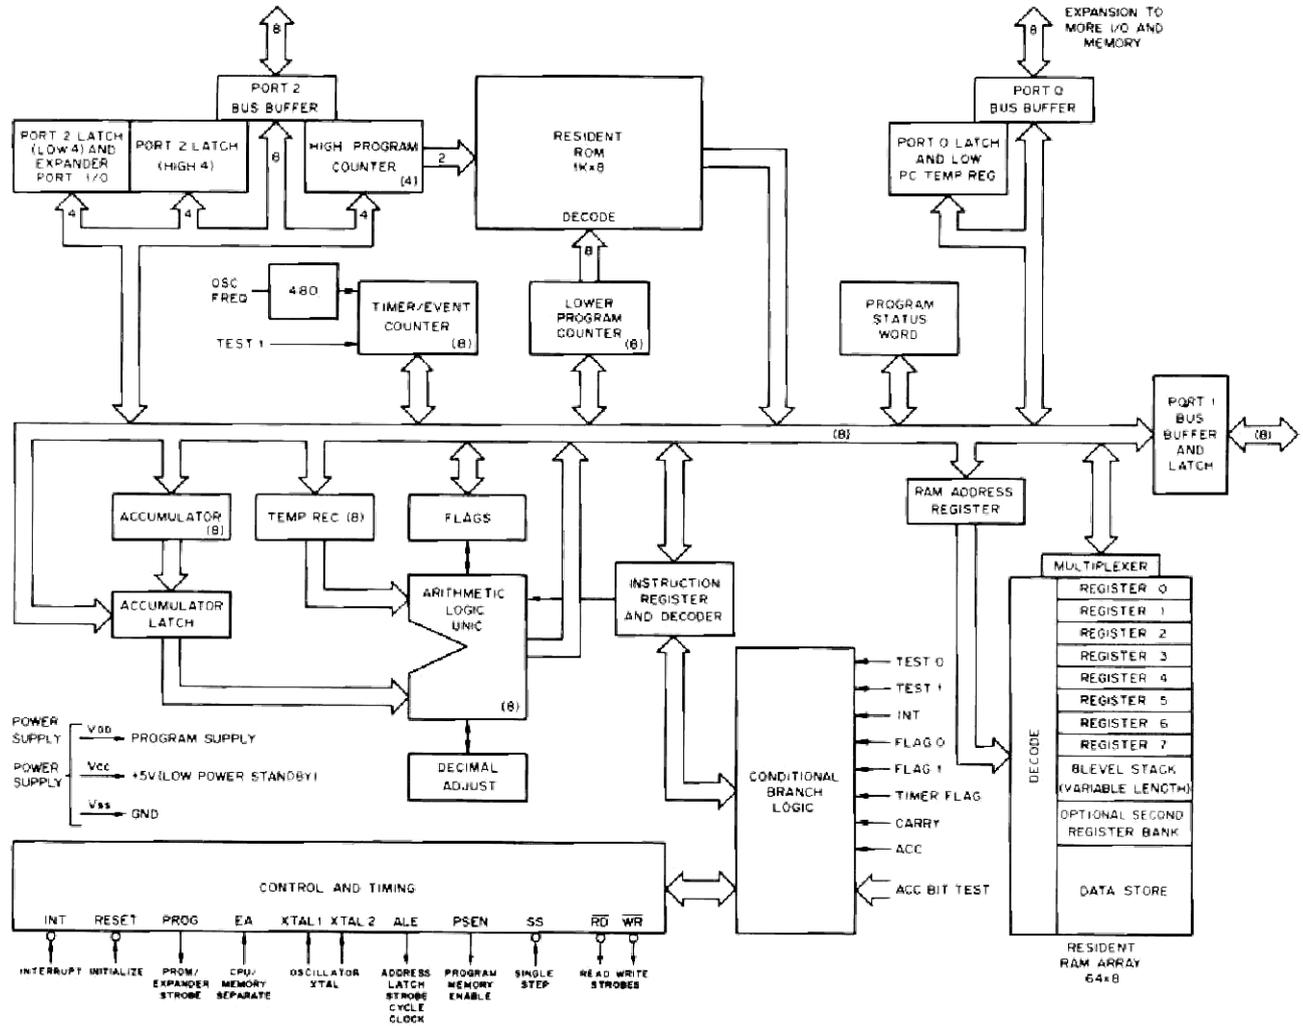

Terminals

- P10 ~ P17 Input and output port (PORT 1)
- P20 ~ P27 Input and output port (PORT 2)
- DB₀ ~ DB₇ Data bus
- T0, T1 Test
- INT Interrupt
- RD Read
- WR Write
- ALE Address latch enable
- PSEN Program store enable
- RESET Reset
- SS Single step
- EA External access
- XTAL 1, 2 Crystal input


Maximum rating (Ta = 25°C)

Item	Symbol	Rating
Operating voltage	V _{CC}	-0.5 ~ +7.0V
	V _{DD}	-0.5 ~ +7.0V
Input voltage	V _I	-0.5 ~ +7.0V
Output voltage	V _O	-0.5 ~ +7.0V
Operating temperature	T _{opt}	0 ~ +70°C
Storage temperature	T _{atg}	-65 ~ +150°C

Fig. 2 μ PD8048C-155 (Digital unit, IC12)

CIRCUIT DESCRIPTION


CTL = "0" for Binary Count
 CTL = "1" for BCD Count

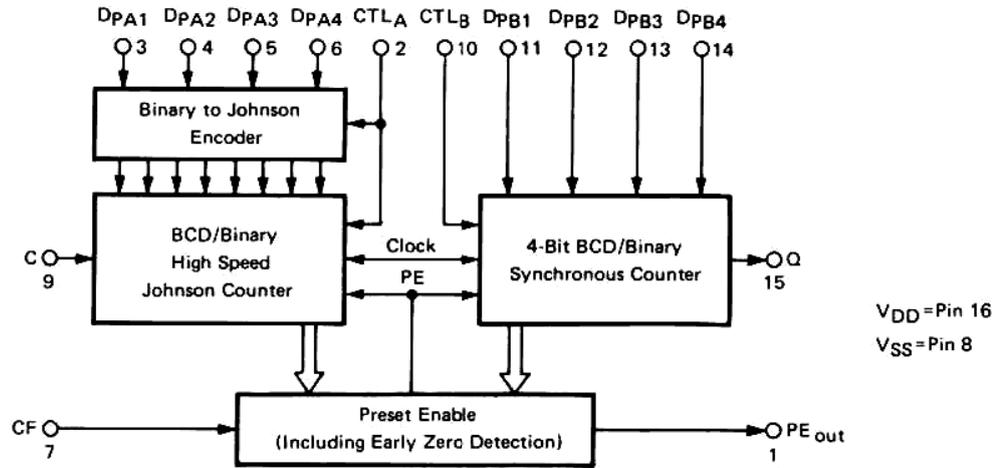

MAXIMUM RATINGS (Voltages referenced to V_{SS})

Rating	Symbol	Value	Unit
DC Supply Voltage	V _{DD}	-0.5 to +18	Vdc
Input Voltage, All Inputs	V _{in}	-0.5 to V _{DD} + 0.5	Vdc
DC Current Drain per Pin	I	10	mAdc

Fig. 6 MC14569B (Digital unit, IC14)

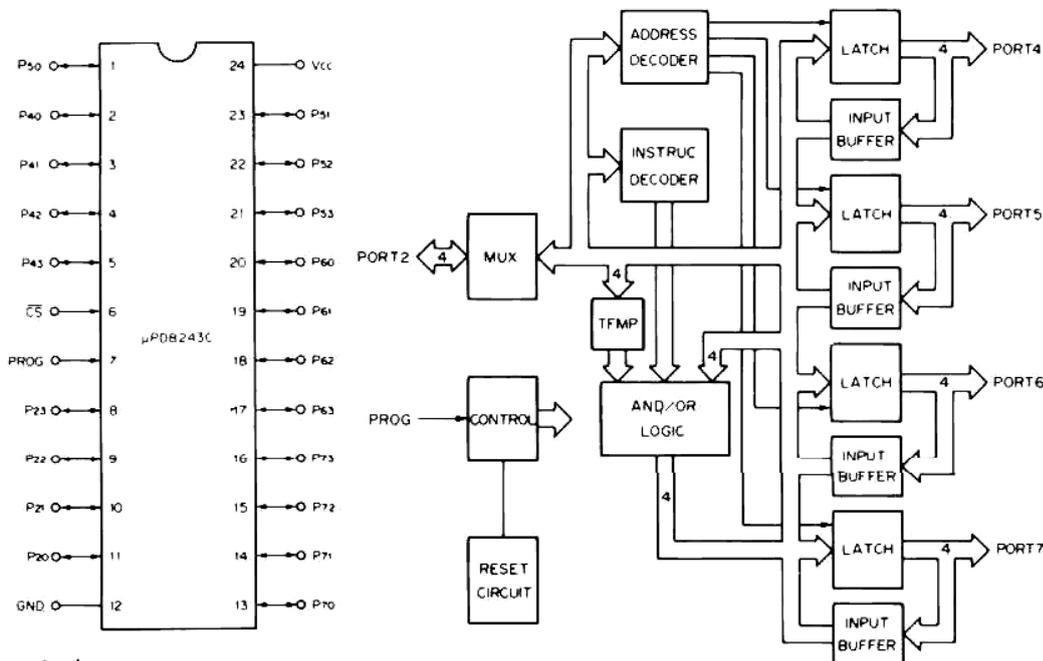

Terminals

- P₂₀ ~ P₂₃ : Input Output (Port 2)
- P₄₀ ~ P₄₁ : Input Output port (Port 4)
- P₅₀ ~ P₅₃ : Input Output port (Port 5)
- P₆₀ ~ P₆₃ : Input Output port (Port 6)
- P₇₀ ~ P₇₃ : Input Output port (Port 7)
- CS : Chip Select
- PROG : Program pulse
- Input Output port (Port 2)

Maximum Rating (Ta = 25°C)

Item	Symbol	Rating
Operating voltage	V _{cc}	-0.5 ~ +7V
Input voltage	V _i	-0.5 ~ +7V
Output voltage	V _o	-0.5 ~ +7V
Operating temperature	T _{opt}	0 ~ +70°C
Storage temperature	T _{stg}	-60 ~ +150°C

Fig. 7 μPD8243C (Digital unit, IC13, 15)

CIRCUIT DESCRIPTION

The rotary encoder input circuit consists of gate circuits IC26, 30, 31, and 32. Two different signals are output from the rotary encoder. These are waveform shaped by Schmitt trigger gate IC26 (TC4093BP), then multiplied by 4 through ICs 31 and 32 (TC4011BP) before being input to the microprocessor via one-half of flip-flop IC30 (TC4011BP) to microprocessor pin 6.

The rotary encoder's direction of rotation is identified by the phase difference of its two output signals. For this purpose, the signals are also coupled to another set of microprocessor inputs (pin1) as up/down control signals via another flip-flop (1/2 IC30).

Each revolution of the rotary encoder provides 75 output pulses, which is multiplied by 4 into 300 pulses before input to the microprocessor. As a result, the encoder acts as a VFO dial covering a frequency range of 6 kHz ($20 \text{ Hz} \times 300 = 6000 \text{ Hz}$) with each revolution. The timing sequence is shown in Figure 10.

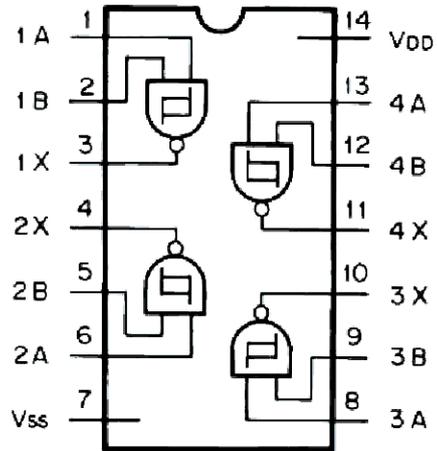


Fig. 8 TC4093BP
(Digital Unit, IC26)

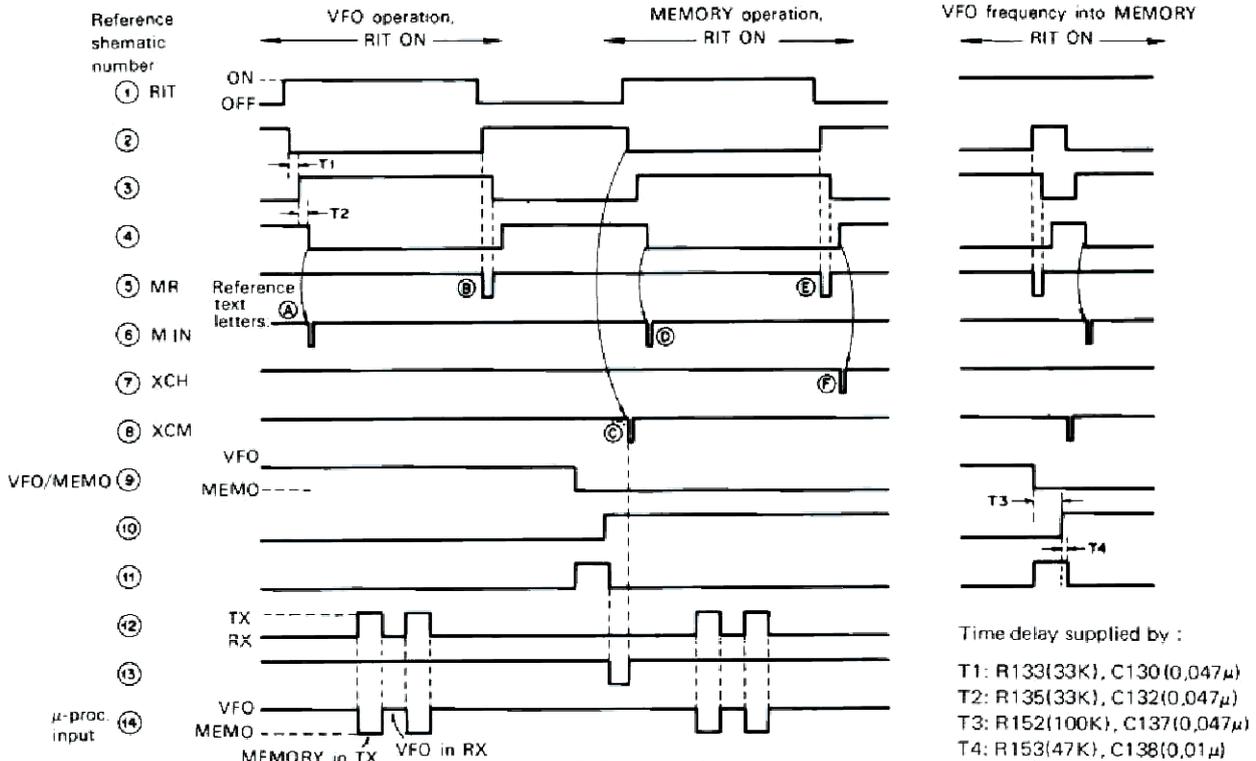


Fig. 9 RIT timing chart

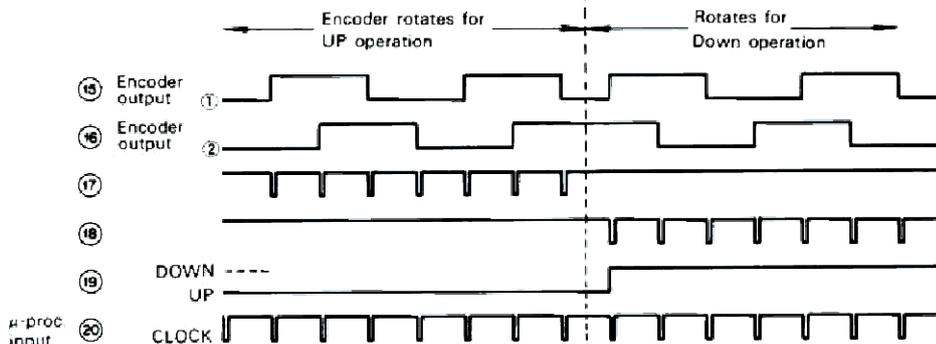


Fig. 10 Encoder timing chart

CIRCUIT DESCRIPTION

The DFC-230 permits frequency shift control by microphone-mounted switches. To generate the frequency shift control clock, the DFC-230 incorporates a dedicated clock oscillator. The oscillator consists of an astable multivibrator combining two NAND gates (IC28: TC4011BP). Its oscillation output is available in two different frequencies obtained by switching its time-constant resistors. Frequency shift speed is controlled by the interval in which the switch is held down, and is switchable between step-by-step, slow, and high speed shifting. Shift speed is determined by a CR time constant circuit and inverter IC27 (TC4049BP). The interval from the step-by-step to slow shift is determined by R177 (100 k Ω) and C168 (10 μ F), and that from slow to high shifting is determined by R179 (120 k Ω) and C152 (47 μ F). The clock frequency for shift control is adjustable for both slow and high speeds over approximately $\pm 50\%$.

The DFC-230 uses a digital RIT circuit utilizing the main dial, instead of a conventional RIT circuit using variable resistors and varicap diodes. This is accomplished by the cross operation of the internal memory and the digital VFO, for which various control signals are created by the logic circuit comprised of IC's 22 ~ 25 (TC4011BP and TC4049BP). A timing sequence of each control block is shown in Figure 9.

Gate-Timing Circuit: General operation.

A gating circuit (IC22 ~ 25) provides control logic for the five fixed, and the single variable memory in the microprocessor (IC13). Four memories are used as fixed channel frequencies, which may be operated in either memory (not variable) or MR (variable) modes. The remaining fixed channel is storage for the existing VFO frequency when RIT is first selected.

This gate-timing circuit provides three control functions for the microprocessor. First, M-IN enters the VFO frequency into a selected memory. Second, MR recalls (Exchanges) a selected memory frequency back to the VFO channel. Third, the exchange (XCH) function swaps the VFO frequency and any selected memory frequency. The VFO frequency is stored in a fixed-channel while that fixed frequency is recalled for variable operation in the MR mode.

Therefore, when MR operation is terminated, the original VFO frequency (stored in the memory channel) and the new memory frequency (in the VFO channel) are exchanged. The original VFO frequency is again on display in the VFO

channel, while the memory frequency is re-stored in its fixed channel.

When RIT is selected, the original VFO frequency is retained in the RIT (fixed channel) memory, and the VFO channel is free for variable operation as an RIT. At initial RIT-ON, the RIT and VFO frequencies are the same.

Receive (RX) operation is in the VFO channel, and transmit (TX) is in the RIT-fixed channel.

Gate-Timing Circuit: Detailed operation.

Two front-panel switches provide operator-control of the Memory and VFO RIT function. These two switches control the Gate-Timing circuit, which in turn sequences four logic lines to the microprocessor (IC13).

Pin 13 is microprocessor input, pin 14 is MR function, pin 15 is the XCH function, and pin 17 is the VFO/MEMO function.

Please refer to the timing-chart for this outline, VFO operation (in Figure 9).

- Ⓐ When the RIT is turned on, the M-IN function enters the VFO frequency into the RIT memory. RX is by the VFO channel, TX in RIT memory.
- Ⓑ When the RIT is turned off, the MR function recalls the VFO frequency from the RIT fixed channel. RIT frequency is not retained.
- Ⓒ Memory operation
When operating in Memory mode, the first step at RIT-on is to exchange (XCH function) the selected memory and VFO frequencies.
- Ⓓ The second step exchanges the VFO frequency into the RIT memory. RIT is now available.
- Ⓔ When the RIT is turned off, the opposite of Ⓓ and Ⓒ occurs.

First, the RIT and VFO frequencies exchange.

- Ⓕ Second, the VFO and M (1 ~ 4) frequencies exchange. The frequency readout uses a 4-digit green LED display to cover frequency from the 100 kHz to 100 Hz order. The digit drive output and the display data are provided by the display output of the microprocessor via the I/O expander IC15: (μ PD8243C). The display data drives the anode-common display LEDs via 7-segment decoder IC16 (SN74LS247).

The frequency display coverage consists of two frequency bands, 000.0 ~ 500.0 and 500.0 ~ 999.9. These two ranges are selected from band information furnished by the main unit.

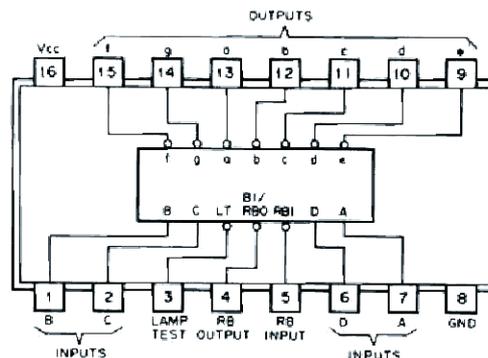


Fig. 11 SN74LS247 (Digital Unit, IC16)

DFC-230

CIRCUIT DESCRIPTION


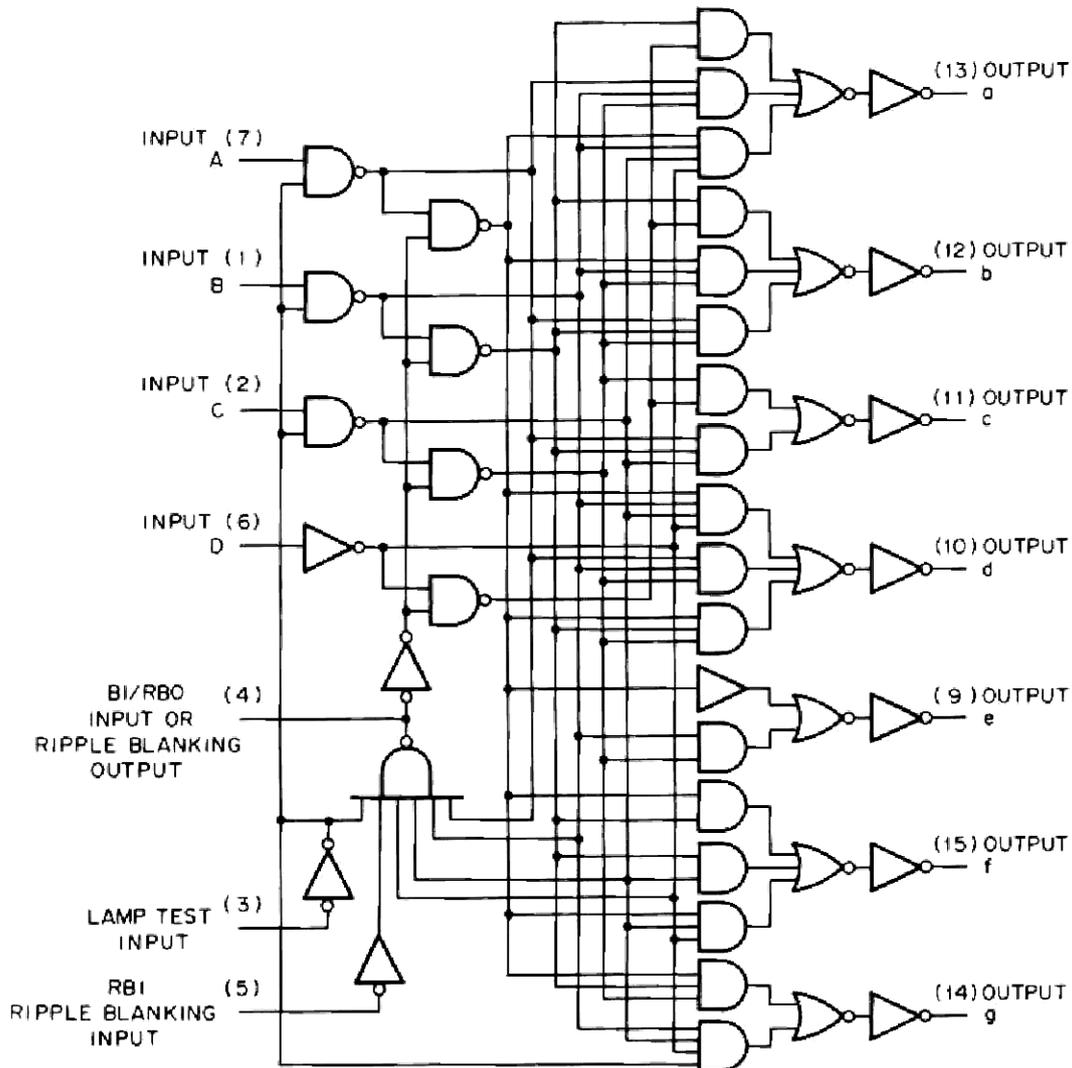




Fig. 12 SN74LS247 (Digital Unit, IC16)

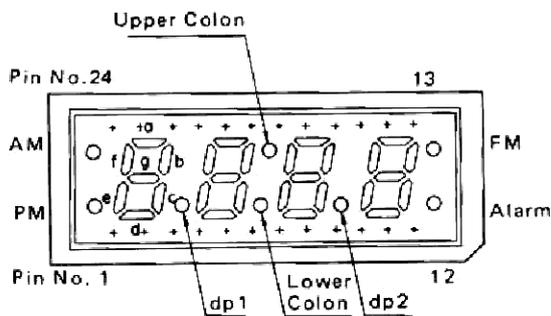

PIN No.	Assignment	PIN No.	Assignment
1	PM Cathode	13	FM, Alarm Anode
2	Dig 1 Anode	14	FM Cathode
3	Seg d Cathode	15	Seg a Cathode
4	d.p 1 Cathode	16	d.p 2 Anode
5	Dig 2 Anode	17	Upper Lower Colon Anode
6	Lower Colon Cathode	18	Seg f Cathode
7	Upper Colon Cathode	19	Seg b Cathode
8	Dig 3 Anode	20	Seg c Cathode
9	d.p 2 Cathode	21	d.p 1 Anode
10	Dig 4 Anode	22	Seg g Cathode
11	Seg e Cathode	23	AM Cathode
12	Alarm Cathode	24	AM, PM Anode

Fig. 13 LED LN543GA (Digital unit, D13)

DISASSEMBLY/PACKING

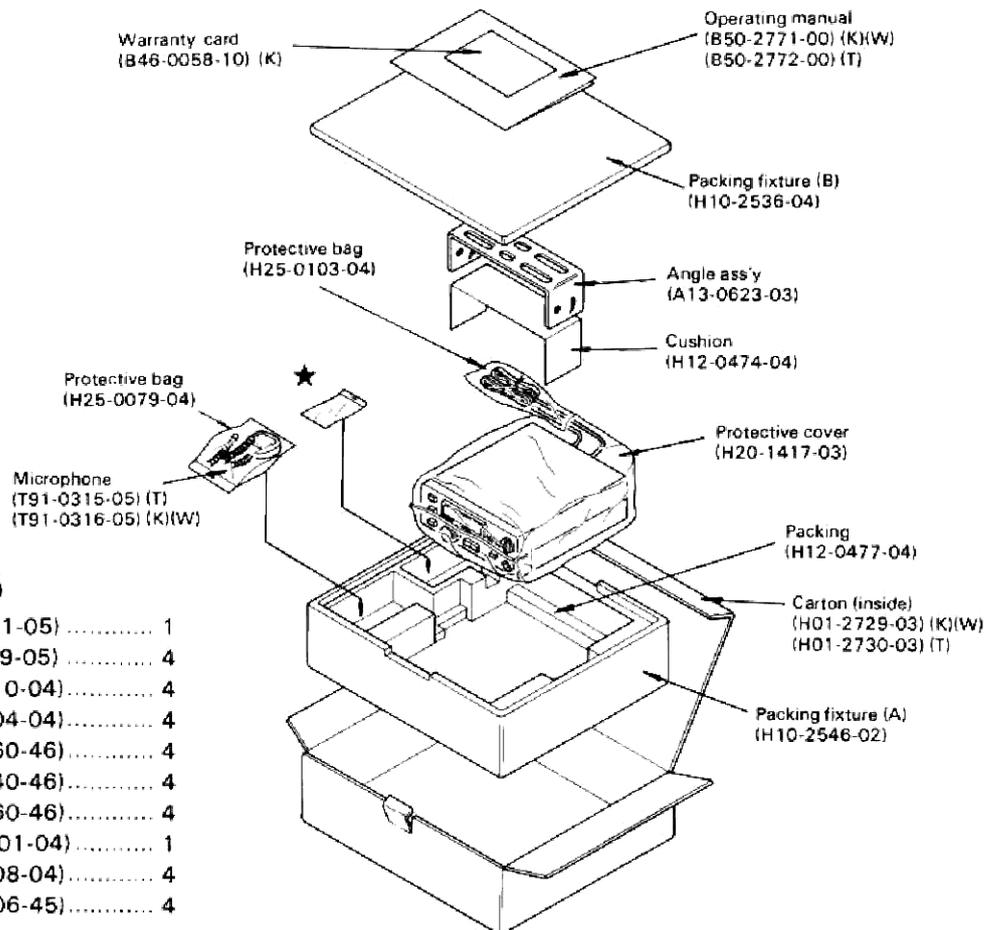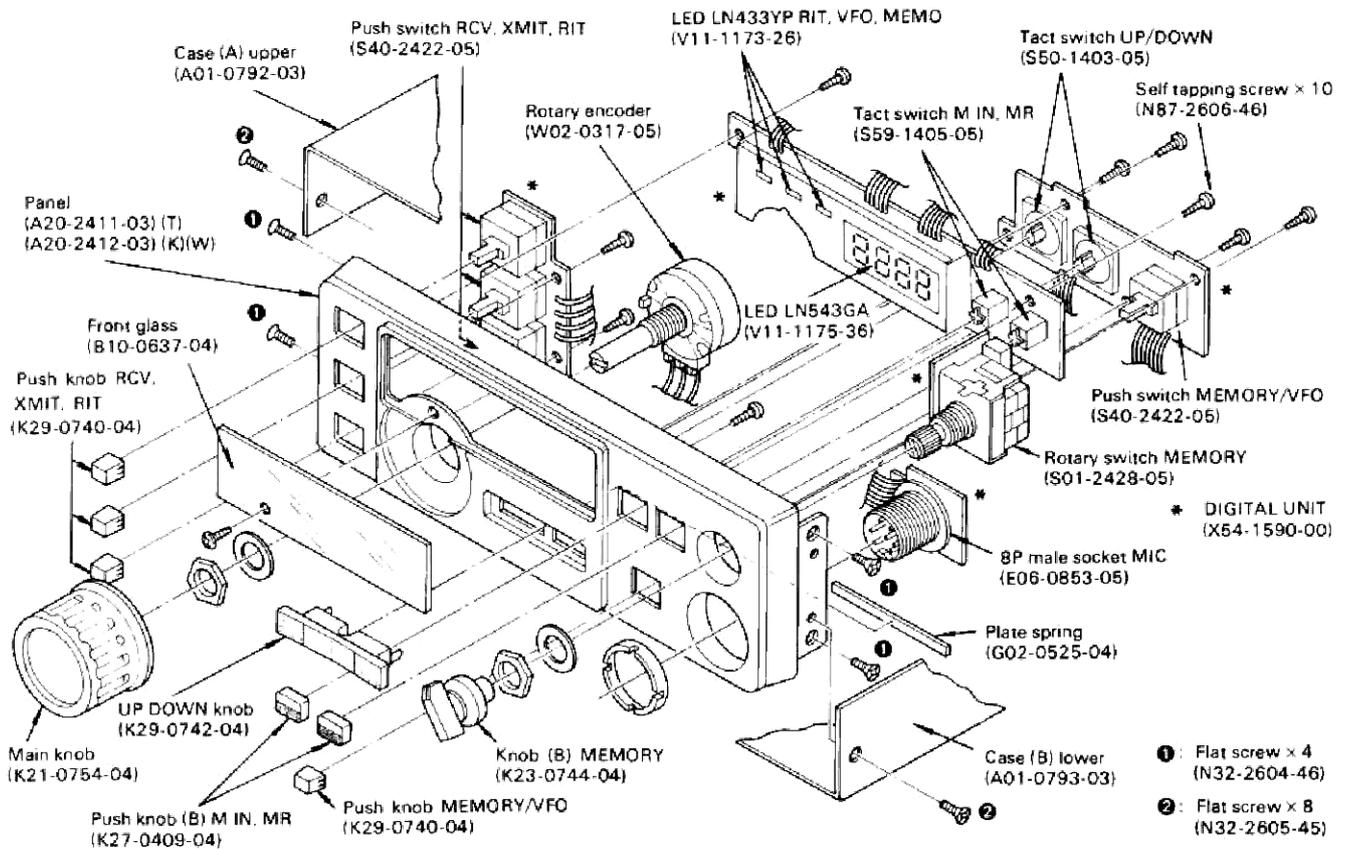

★ Protective bag (H25-0049-03)

Pin plug (CAL)	(E14-0101-05)	1
Foot	(J02-0069-05)	4
Flange nut	(N14-0510-04)	4
Allen head bolt	(N99-0304-04)	4
Spring washer	(N16-0060-46)	4
Flat washer	(N15-1040-46)	4
Flat washer	(N15-1060-46)	4
Allen key	(W01-0401-04)	1
Round screw	(N09-0008-04)	4
Bind screw	(N35-3006-45)	4

DFC-230

ADJUSTMENTS

TEST EQUIPMENT REQUIRED

1. VTVM or DVM

- 1) Input resistance: More than 1 M Ω
- 2) Voltage range: 1.5 to 1000V AC/DC

NOTE:

A high-precision voltmeter may be used. However, accurate readings can not be obtained for high-impedance circuits.

2. RF VTVM

- 1) Input impedance: 1 M Ω and less than 3 pF, min.
- 2) Voltage range: 10 mV to 300V
- 3) Frequency range: 50 MHz or greater

3. AF VTVM

- 1) Frequency range: 50 Hz to 10 kHz
- 2) Input resistance: 1 M Ω or greater
- 3) Voltage range: 10 mV to 30V

4. OSCILLOSCOPE

Requires high sensitivity, and external synchronization capability.

5. Standard Signal Generator (SSG)

- 1) Frequency range: 1.8 to 30 MHz
- 2) Output: -20 dB/0.1 μ V ~ 120 dB/1V

NOTE:

Generator must be frequency stable.

6. FREQUENCY COUNTER

- 1) Minimum input voltage: 50 mV
- 2) Frequency range: Greater than 40 MHz

7. VFO Cable

8. CAL Cable

9. TS-130 S or V

PREPARATION

- Unless otherwise specified, set the controls as follows.

1) TS-130

POWER	OFF	NAR/WIDE	NAR
STBY	REC	IF SHIFT	CENTERED
BAND	14	RF GAIN	MAX
CAL	OFF	AF GAIN	MIN
RF ATT	OFF	VFO/FIX	VFO
MODE	CW	VFO SCALE	O

2) DFC-230

RCV	MAIN
XMIT	MAIN
RIT	OFF
MEMORY/VFO	VFO
MEMORY	1

- Connection

- 1) Cable the DFC-230 MIC cable and the TS-130 MIC connector.
- 2) Cable the DFC-230 CONTROL cable and the TS-130 EXT. VFO socket.

- NOTE:

When adjusting the trimmers or coils, use a non-inductive alignment tool made of nylon, or ceramic material.


REFERENCE

Japanese "SSG"

American "SG"

-6dB	0.25 μ V
0dB	0.5 μ V
6dB	1 μ V
12dB	2 μ V
24dB	8 μ V
30dB	15.8 μ V
40dB	50 μ V
50dB	158 μ V
60dB	500 μ V
70dB	1.58mV
80dB	5mV
90dB	15.8mV
100dB	50mV
120dB	0.5V

ADJUSTMENTS

Item	Condition	Measurement			Adjustment			Specification	Remarks	
		Test equipment	Unit	Terminal	Unit	Part	Method			
1 Voltage check	TS-130 POWER ON	DVM	Digital unit A	IC15 Pin 24				$5 \pm 0.5V$		
				Tinned jumper wire beside IC4 (Pins 1 and 2)				$9 \pm 0.3V$		
	IC12 Pin 26						$5 \pm 0.5V$	Backup		
	TS-130 POWER OFF									
	POWER ON									
2 Master oscillator	DFC-230 TC-1: Centered	f. counter	Digital unit B	TP1	Digital unit B	TC2	5.000.700 \pm 50 Hz			
										
	TS-130 STBY: SEND									
	TS-130 STBY: REC								TC1	5.000.000 \pm 10 Hz
	TS-130 STBY: SEND					5.000.700 \pm 50 Hz	When out of specification readjust TC2.			
	STBY: REC									
3 VCO-1	DFC-230 MEMORY/VFO: VFO Display: 999.9	DVM	Digital unit A	TP5	Digital unit A	L23	7.5 \pm 0.1V			
	Display: 0.0									$1.8 \pm 0.4V$
4 BPF 1 (500 kHz)		RF VTVM	Digital unit B	IC7 Pin 1	Digital Unit B	T3~5	MAX.			
5 BPF 2 (5 MHz)		RF VTVM	Digital unit B	TP2	Digital unit B	T1, 2 6, 7, 8	MAX.			
6 VCO-2	Display: 599.9	DVM	Digital unit B	TP3	Digital unit B	L16	7.0 \pm 0.1V			
	Display: 900.9									$2.4 \pm 0.5V$
7 Mixer balance and CAL	DFC-230 RCV: RMT Display: 19.9 TS-130 ANT: to SSG RF output: 14.0208 MHz. 60 dB.						Adjust DFC-230 main tuning control to get maximum S meter reading on TS-130.			
	Adjust the SSG RF output to S9 + 20 dB.									
	DFC-230 Display: 20.8 (Zero beat should be obtained)	AF VTVM, Oscilloscope	TS-130	Ext SP	Digital unit B	VR1	Minimum beat level.			
	DFC-230 Display: 0 ~ 50							There should be no other signal besides the 14.0208 MHz signal.		
	Cable the DFC-230 CAL connector and the TS-130 ANT connector							A beat should be obtained.	Check	
8 VFO output level (check)	DFC-230 Display: 250	RF VTVM	Digital unit B	Cathode of D3				$0.2V \begin{matrix} +3 \\ -1 \end{matrix} \text{ dB}$		


DFC-230

ADJUSTMENTS

Item	Condition	Measurement			Adjustment			Specification	Remarks				
		Test equipment	Unit	Terminal	Unit	Part	Method						
9. MIC SCAN	DFC-230 VR2. 3 (Digital unit B): Centered	F. counter	Digital unit B	IC28 Pin 4	Digital Unit B	(Adjust only When out of specification) VR2 45±10 Hz		5±2 sec.	Until approx 5 sec.				
	(Adjust only When out of specification) VR3 130±20 Hz					After approx 5 sec							
	Time which scan speed changes from slow to fast with MIC connector pin 3 to ground												
10. Display (Check)	DFC-230 Check each function: main tuning control, FAST STEP, and MIC UP/DOWN independently.							Display changes from 900.0 to 599.9					
	TS-130 BAND: 3.5 DFC-230 FAST STEP: UP and DOWN							Display changes from 400.0 to 99.9					
	DFC-230 Turn the main tuning control one turn.							The kHz order display should vary by 6 kHz.					
11. Memory (Check)	DFC-230 Display: 10.0 MEMORY: 1 MIN: ON							"Beep" tone should be heard					
	Display: 20.0 MEMORY: 2 MIN: ON							Tone should be heard.					
	Display: 30.0 MEMORY: 3 MIN: ON												
	Display: 40 MEMORY: 4 MIN: ON												
	MEMORY: 1 MR: ON							Displays 10.0 and tone should be heard.					
	MEMORY: 2 MR: ON							Displays 20.0 and tone should be heard.					
	MEMORY: 3 MR: ON							Displays 30.0 and tone should be heard.					
	MEMORY: 4 MR: ON							Displays 40.0 and tone should be heard.					
	TS-130 BAND: 14 DFC-230 RCV: RMT MEMORY/VFO: MEMORY							<table border="1"> <tr><th colspan="2">Display</th></tr> <tr><th>DFC-230</th><th>TS-130</th></tr> </table>		Display		DFC-230	TS-130
	Display												
	DFC-230	TS-130											
	MEMORY: 1							100	14.010.0				
	2							200	14.020.0				
	3							300	14.030.0				
4							400	14.040.0					
TS-130 BAND: 3.5 DFC-230 RCV: RMT MEMORY/VFO: MEMORY							<table border="1"> <tr><th colspan="2">Display</th></tr> <tr><th>DFC-230</th><th>TS-130</th></tr> </table>		Display		DFC-230	TS-130	
Display													
DFC-230	TS-130												
MEMORY: 1							5100	3 510.0					
2							5200	3 520.0					
3							5300	3 530.0					
4							5400	3 540.0					

ADJUSTMENTS


Item	Condition	Measurement			Adjustment			Specification	Remarks																																	
		Test equipment	Unit	Terminal	Unit	Part	Method																																			
12. Cross-freq. operation (Check)	DFC-230 MEMORY/VFO: VFO Display: 599.9 TS-130 Display 14.000.0 MODE USB or REV	<table border="1"> <tr> <td colspan="2">DFC-230</td> <td>RCV. MAIN</td> <td>RCV. RMT</td> <td>RCV. RMT</td> <td>RCV. MAIN</td> </tr> <tr> <td colspan="2">TS-130 STBY SW</td> <td>XMIT MAIN</td> <td>XMIT. MAIN</td> <td>XMIT: RMT</td> <td>XMIT: RMT</td> </tr> <tr> <td rowspan="2">REC</td> <td>Display (TS-130)</td> <td>14.000.0</td> <td>14.599.9</td> <td>14.599.9</td> <td>14.000.0</td> </tr> <tr> <td>Indicator</td> <td>VFO (TS-130)</td> <td>VFO (DFC-230)</td> <td>VFO (DFC-230)</td> <td>VFO (TS-130)</td> </tr> <tr> <td rowspan="2">SEND</td> <td>Display (TS-130)</td> <td>14.000.0</td> <td>14.000.0</td> <td>14.599.9</td> <td>14.599.9</td> </tr> <tr> <td>Indicator</td> <td>VFO (TS-130)</td> <td>VFO (TS-130)</td> <td>VFO (DFC-230)</td> <td>VFO (DFC-230)</td> </tr> </table>			DFC-230		RCV. MAIN	RCV. RMT	RCV. RMT	RCV. MAIN	TS-130 STBY SW		XMIT MAIN	XMIT. MAIN	XMIT: RMT	XMIT: RMT	REC	Display (TS-130)	14.000.0	14.599.9	14.599.9	14.000.0	Indicator	VFO (TS-130)	VFO (DFC-230)	VFO (DFC-230)	VFO (TS-130)	SEND	Display (TS-130)	14.000.0	14.000.0	14.599.9	14.599.9	Indicator	VFO (TS-130)	VFO (TS-130)	VFO (DFC-230)	VFO (DFC-230)				
	DFC-230		RCV. MAIN	RCV. RMT	RCV. RMT	RCV. MAIN																																				
	TS-130 STBY SW		XMIT MAIN	XMIT. MAIN	XMIT: RMT	XMIT: RMT																																				
	REC	Display (TS-130)	14.000.0	14.599.9	14.599.9	14.000.0																																				
Indicator		VFO (TS-130)	VFO (DFC-230)	VFO (DFC-230)	VFO (TS-130)																																					
SEND	Display (TS-130)	14.000.0	14.000.0	14.599.9	14.599.9																																					
	Indicator	VFO (TS-130)	VFO (TS-130)	VFO (DFC-230)	VFO (DFC-230)																																					
After the set-up as described above, check the display and indicator functions as shown at right.																																										
TS-130 STBY: REC																																										
13. RIT (Check)	DFC-230 RCV: RMT XMIT: RMT MEMORY/VFO: VFO Display: 599.9																																									
	RIT: ON Display: Any frequency (X) except 599.9						RIT indicator lights																																			
	TS-130 STBY: SEND						Displays 599.9																																			
	STBY: REC						Displays (X)																																			
	DFC-230 RIT: OFF						Displays 599.9																																			
	MEMORY/VFO: MEMORY MEMORY: 1						Displays 10.0																																			
	RIT: ON Display: Any frequency except 10.0																																									
RIT: OFF						Displays 10.0																																				
14. Backup (Check)	DFC-230 MEMORY/VFO: VFO Display: 100.0 TS-130 POWER OFF						Display disappears.																																			
	POWER: ON						Displays 100.0																																			

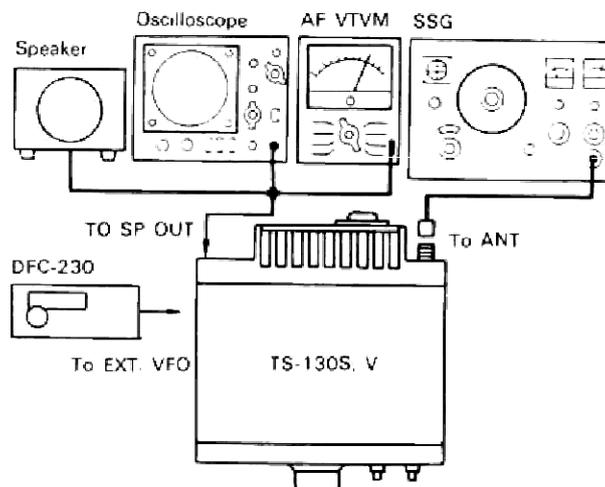


☆ Caution
NEVER transmit when SSG is connected to the ANT terminal.

Fig. 14 7. Mixer balance

ADJUSTMENTS / PARTS LIST

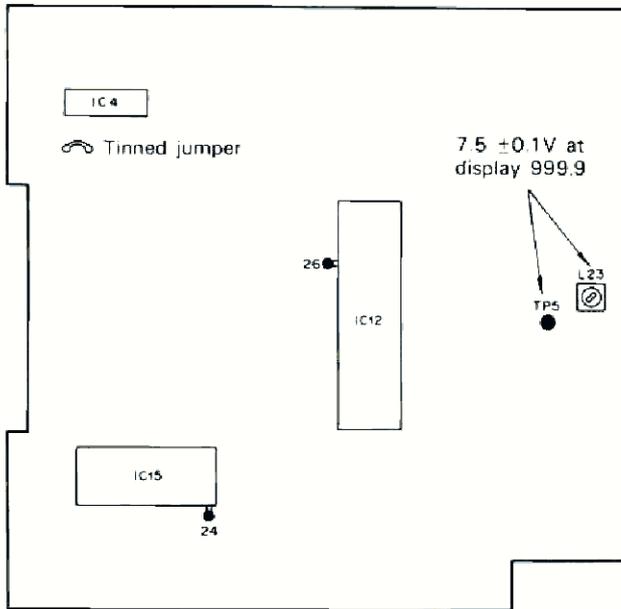

Digital unit A

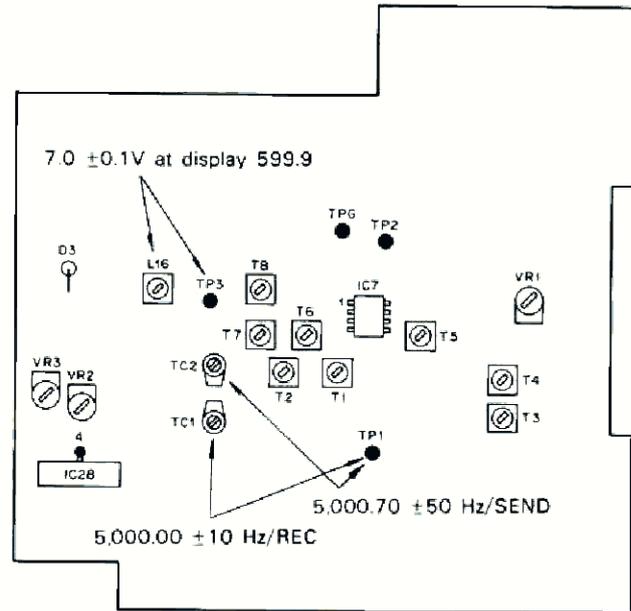


Digital unit B

DFC-230 Semiconductor ☆: New parts

Item	Name	Parts No.	Re- marks
Diode	1S1555	V11-0076-05	
	1S1587	V11-0370-05	
Vari-cap diode	1SV54GC	V11-4173-46	
Zener diode	WZ-061	V11-0243-05	
	XZ-049	V11-4175-46	
LED	LN433YP	V11-1173-26	
	LN543GA	V11-1175-36	☆
TR	2SA473 (Y)	V01-0473-06	
	2SA1015 (Y)	V01-1015-06	
	2SC1775 (E)	V03-1775-06	
	2SC1815 (Y)	V03-1815-06	
	2SC1959 (Y)	V03-1959-06	

Item	Name	Parts No.	Re- marks
IC	MC14569B	V30-1100-06	
	NJM78L05A	V30-1020-16	
	SN16913P	V30-1048-06	
	SN74LS90N	V30-1005-26	
	SN74LS247N	V30-1030-56	
	TC4011BP	V30-0301-70	
	TC4049BP	V30-1009-26	
	TC4093BP	V30-1214-16	
	TC5081P	V30-1132-06	
	TC9122P	V30-1036-16	
	μPC1037H	V30-0177-16	
	μPC14305H	V30-1029-36	
	μPD8048C-155	V30-1176-26	
	μPD8243C	V30-1177-16	

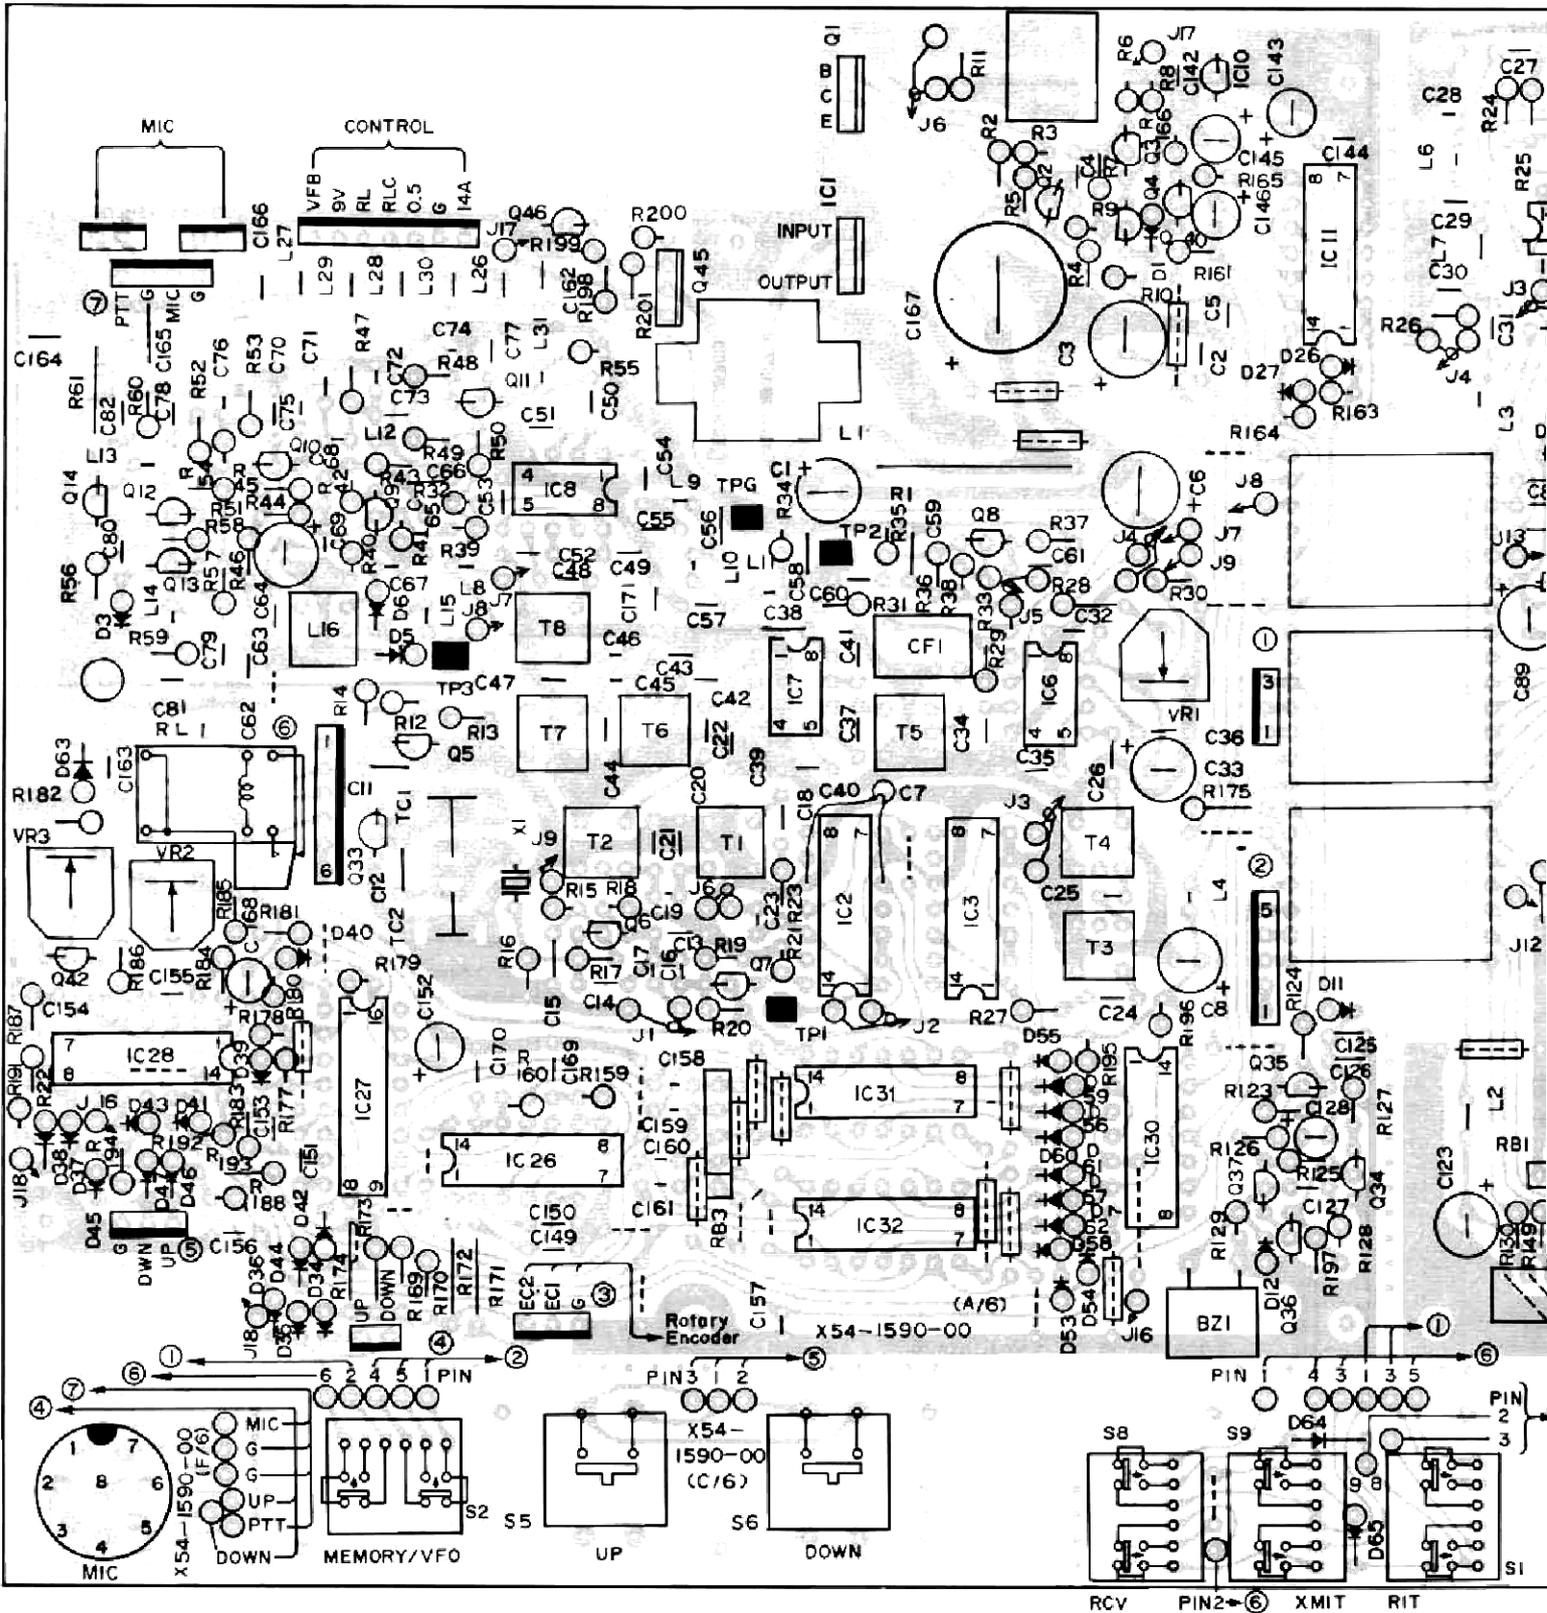




2SA473

2SA1015 2SC1775
2SC1815 2SC1959

μPC1037H


LN433

μPC14305H




Q1,45:
Q20 ~
IC1: μP
IC12: μP
IC26: T
D1,4: X

BOARD VIEW (COMPONENT SIDE)

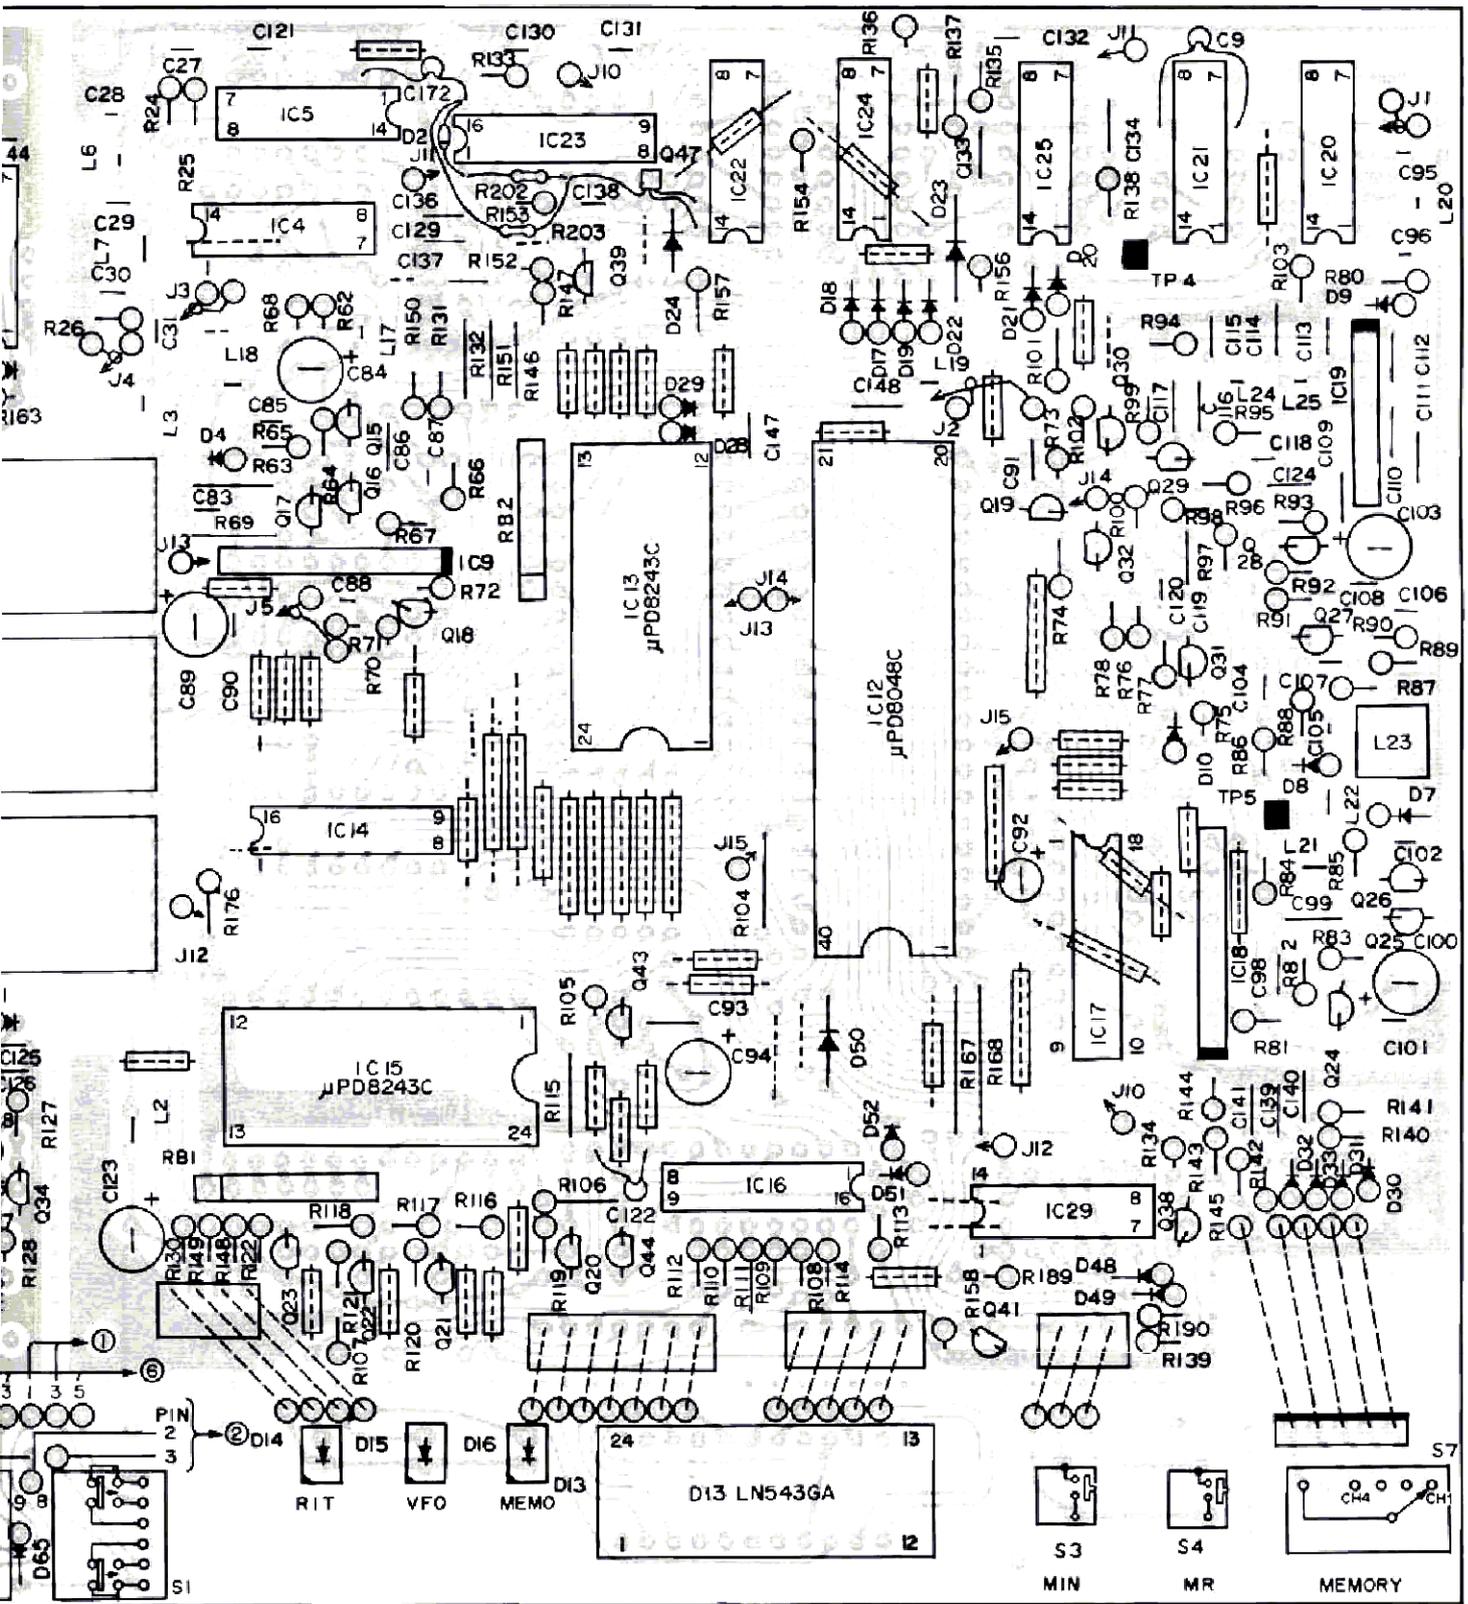


- Q1,45: 2SA473(Y) Q2 ~ 12,18,19,27 ~ 31,33,34,36,38 ~ 44,46: 2SC1815(Y) Q13,14: 2SC1959(Y) Q15 ~ 17,24 ~ 26: 2SC1775(E)
 Q20 ~ 23,32,35,37,47: 2SA1015(Y)
 IC1: µPC14305H IC2 ~ 5,20,21: SN74LS90N IC6 ~ 8: SN16913P IC9,18: TC5081P IC10: NJM78L05A IC11,22,24,25,28 ~ 32: TC4011BP
 IC12: µPD8048C-155 IC13,15: µPD8243C IC14: MC14569B IC16: SN74LS247N IC17: TC9122P IC19: µPC1037H IC23,27: TC4049BP
 IC26: TC4093BP
 D1,4: XZ-049 D2,10 ~ 12,17 ~ 24,26 ~ 65: IS1555 D3: IS1587 D5 ~ 8: ISV54GC D9: WZ-061 D13: LN543GA D14 ~ 16: LN433YP

CHEMATIC DIAGRAM

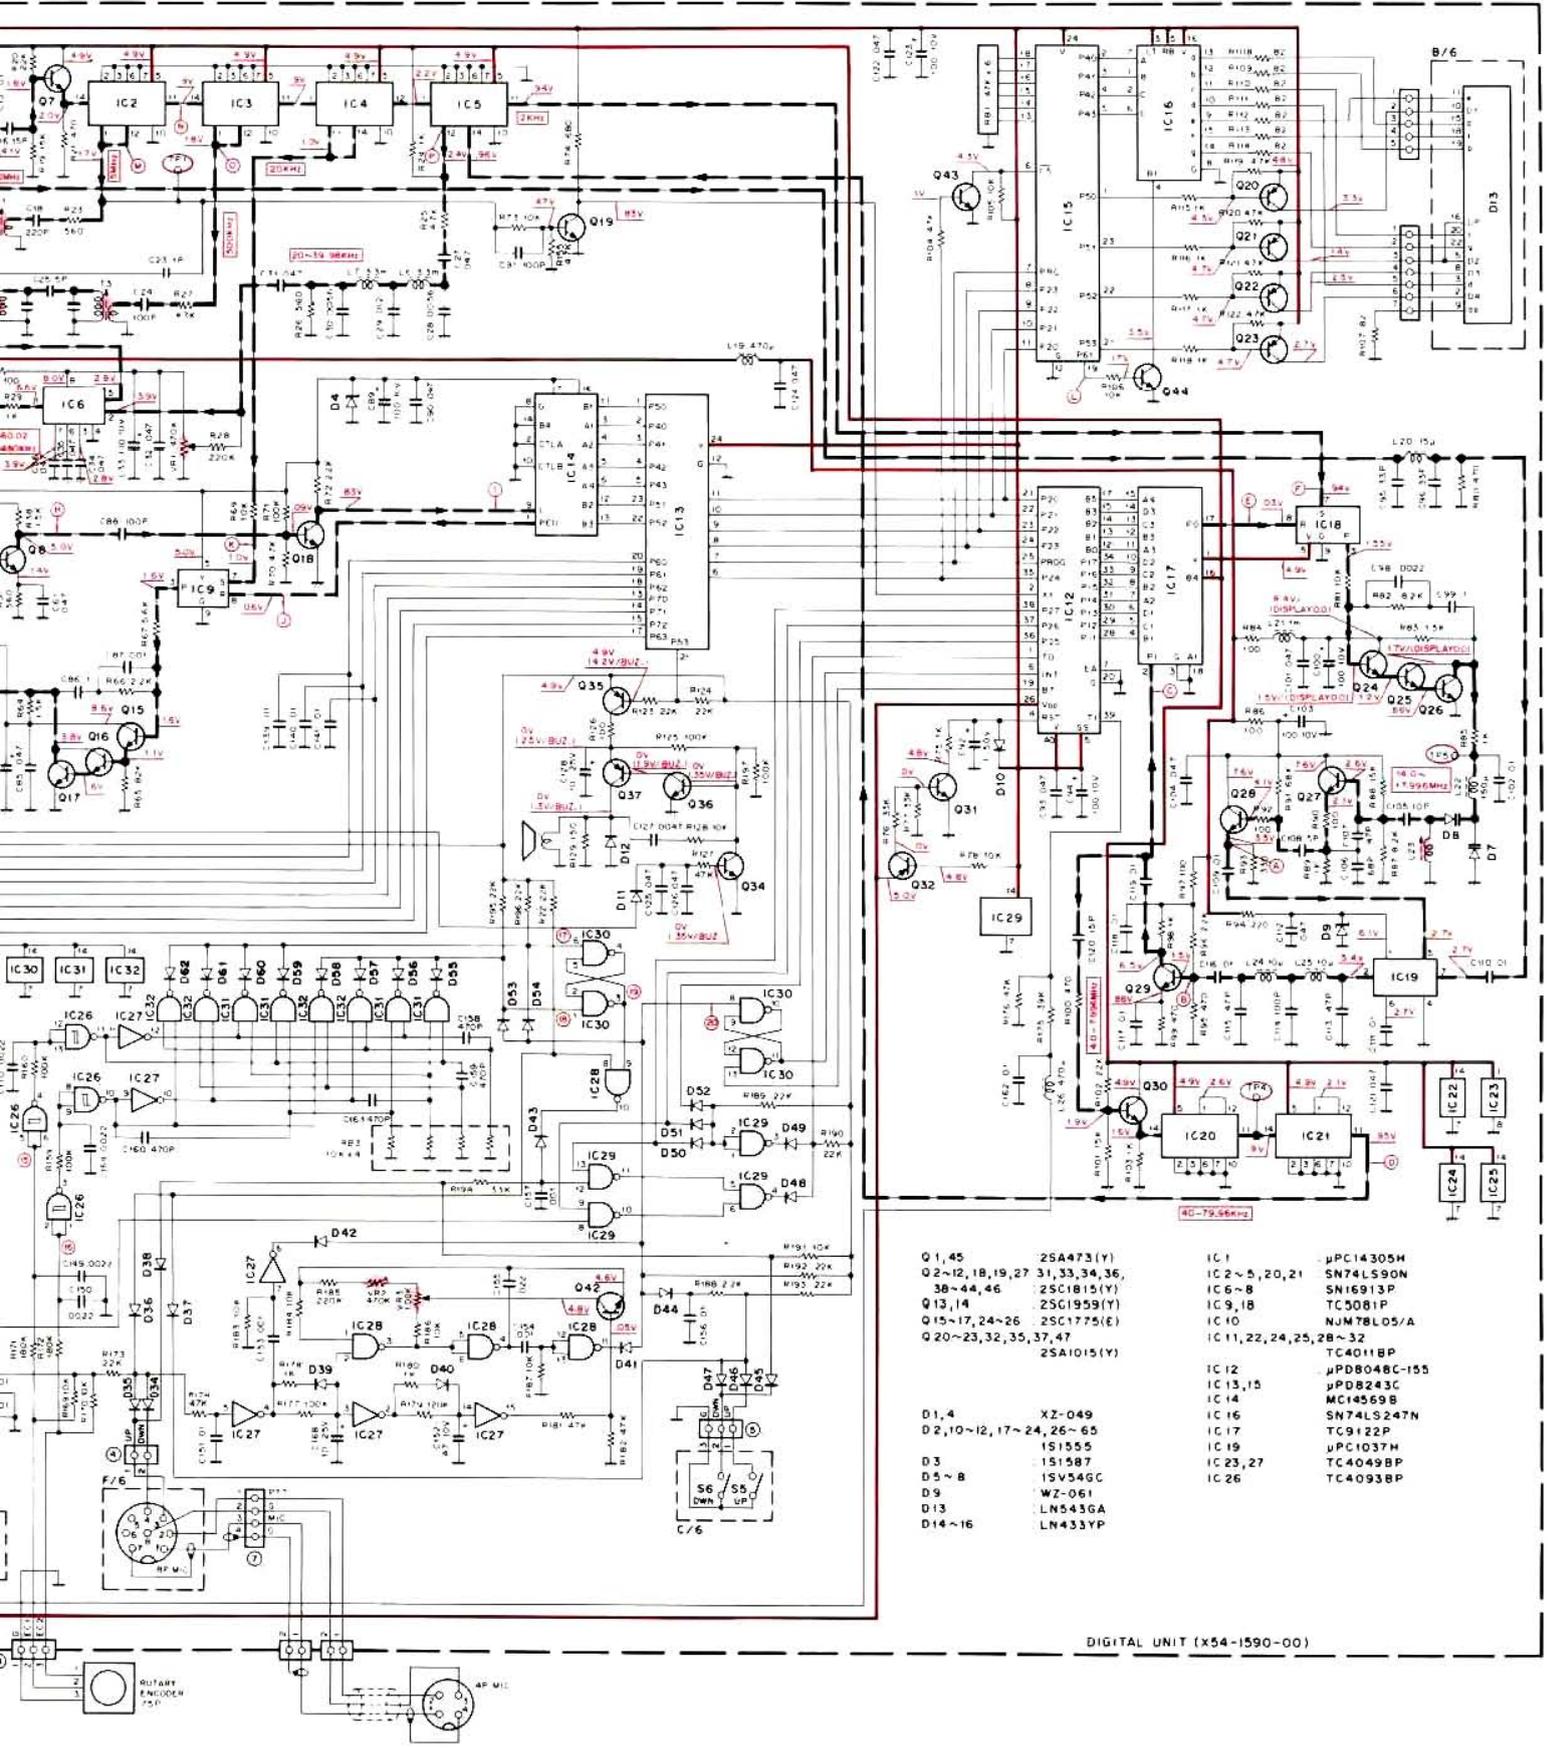


- | | | | |
|-------------------------|---------------------------|-------------------------|--------------|
| Q1, 45 | 2SA473(Y) | IC1 | μPC14305H |
| Q2~12, 18, 19, 27 | 31, 33, 34, 36, 38~44, 46 | IC2~5, 20, 21 | SN74LS90N |
| Q13, 14 | 2SC1815(Y) | IC6~8 | SN16913P |
| Q15~17, 24~26 | 2SC1959(Y) | IC9, 18 | TC5081P |
| Q20~23, 32, 35, 37, 47 | 2SC1775(E) | IC10 | NUM78L05/A |
| | 2SA1015(Y) | IC11, 22, 24, 25, 28~32 | TC4011BP |
| | | IC12 | μPD8048C-155 |
| D1, 4 | XZ-049 | IC13, 15 | μPD8243C |
| D2, 10~12, 17~24, 26~65 | 1S1555 | IC14 | MC14569B |
| D3 | 1S1587 | IC16 | SN74LS247N |
| D5~8 | 1SV546C | IC17 | TC9122P |
| D9 | WZ-061 | IC19 | μPC1037M |
| D13 | LN5436A | IC23, 27 | TC4049BP |
| D14~16 | LN433YP | IC26 | TC4093BP |

DIGITAL UNIT (X54-1590-00)

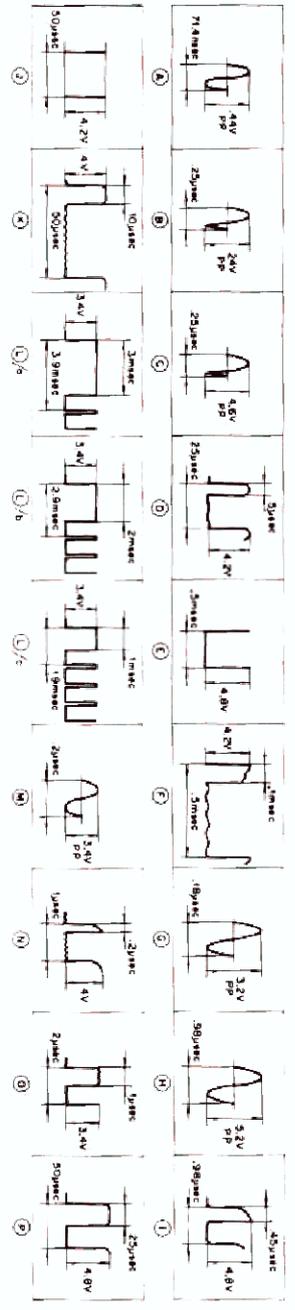

< Note > Wave forms are displayed at 0.0 (VFO output 5.5MHz).

Wave form **A** /a **L**/b **C**/c
 Display: 0.0 ~ 9.9 10.0 ~ 99.9 900.0 ~ 999.9
 100.0 ~ 599.9

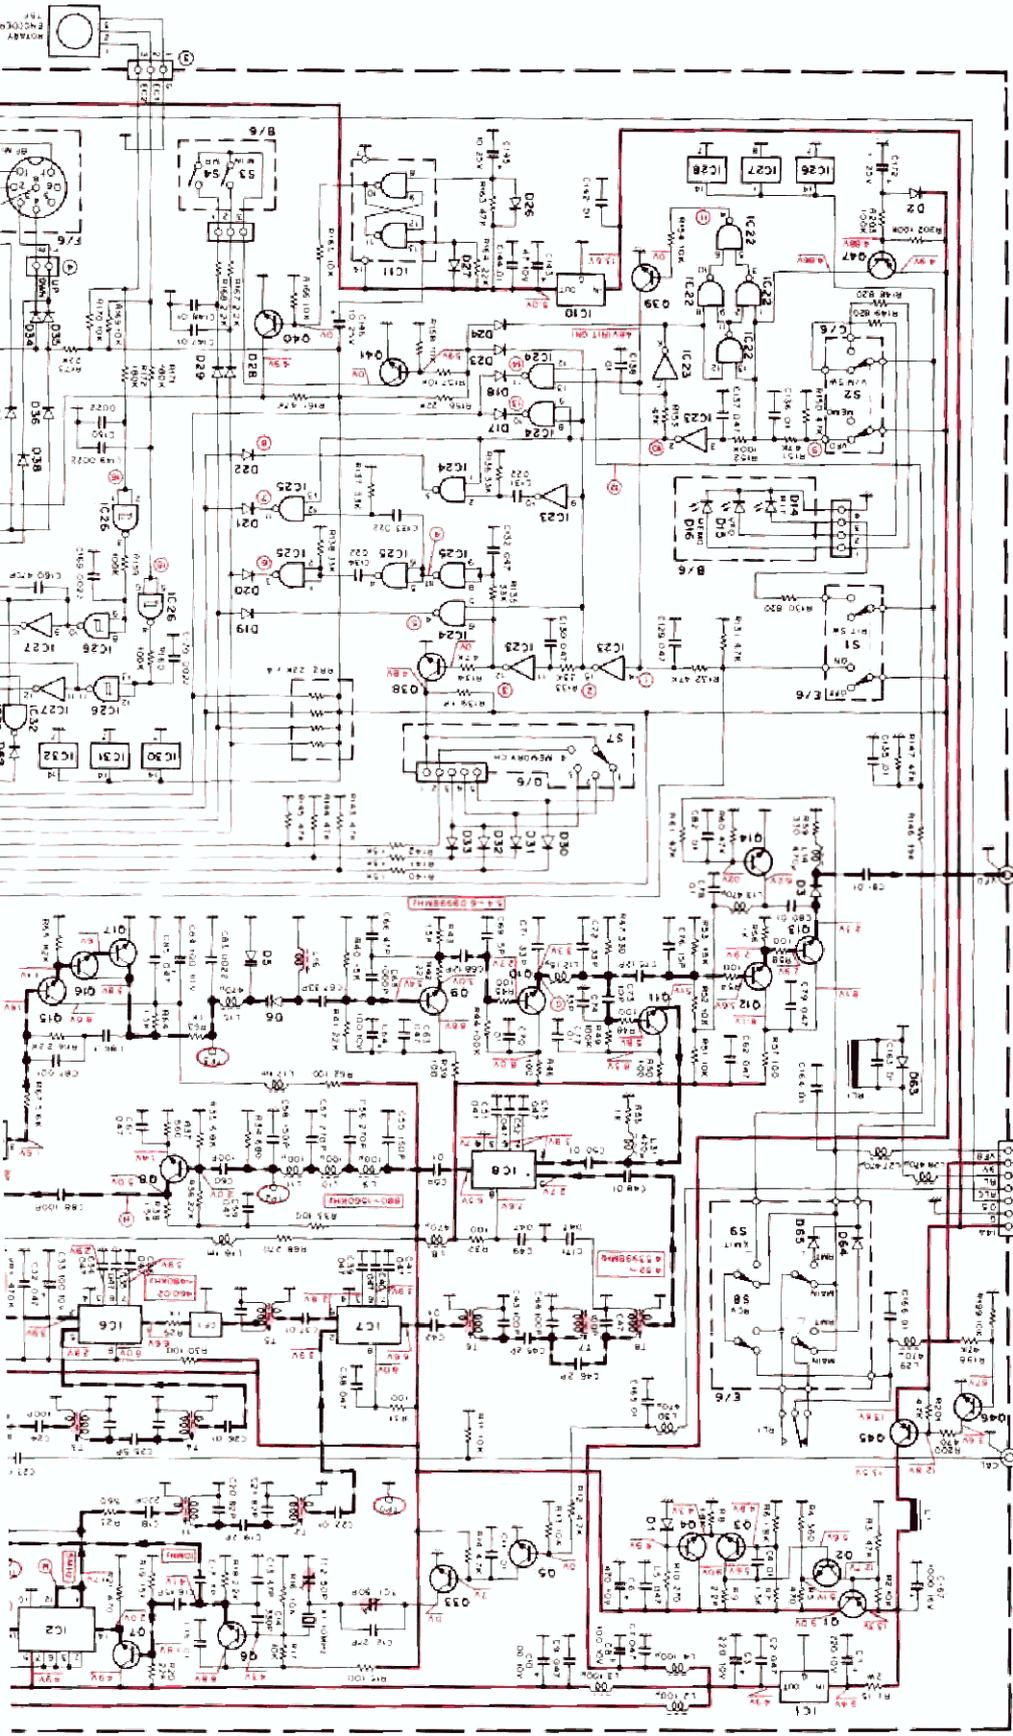

DFC-230

PARTS LIST

DFC-230 General

Ref. No.	Parts No	Description	Re- marks
	A01-0792-03	Case (A) upper	☆
	A01-0793-03	Case (B) lower	☆
	A13-0623-03	Angle ass'y	☆
	A20-2411-03	Panel (T)	☆
	A20-2412-03	Panel (K)(W)	☆
	B05-0713-04	Grill cloth, Transducer	
	B10-0637-04	Front glass	☆
	B46-0058-10	Warranty card (K)	☆
	B50-2771-00	Operating manual (K)(W)	☆
	B50-2772-00	Operating manual (T)	☆
	E07-0852-05	BP Metal plug MIC	☆
	E14-0101-05	Pin plug (CAL)	
	E30-1677-05	BP DIN cord REMOTE	☆
	E30-1679-05	4P MIC cord	☆
	G02-0525-04	Plate spring	☆
	H01-2729-03	Carton (inside) (K)(W)	☆
	H01-2730-03	Carton (inside) (T)	☆
	H10-2536-04	Packing fixture (B) Top	
	H10-2546-02	Packing fixture (A) Bottom	☆
	H12-0474-04	Cushion	
	H12-0477-04	Packing	☆
	H20-1417-03	Protective cover	
	H25-0049-03	Accessory bag (Foot, Screw)	
	H25-0079-04	Accessory bag (MIC)	
	H25-0103-04	Accessory bag (Cord)	
	J02-0089-05	Foot	
	J42-0420-05	Cord bushing MIC	
	J42-0425-05	Cord bushing CONTROL	☆
	J61-0019-05	Vinylette	
	K21-0754-04	Main knob	☆
	K23-0744-04	Knob (B) MEMORY	☆
	K27-0409-04	Push knob (B) M IN, MR	
	K29-0740-04	Push knob, RCV, X MIT, RIT, MEMO/VFO	
	K29-0742-04	UP DOWN knob	☆
	N08-0070-04	Screw Rear panel (GND)	
	N09-0008-04	Round screw (Angle)	
	N14-0510-04	Flange nut (Angle)	
	N15-1040-46	Flat washer (GND, Angle)	
	N15-1060-46	Flat washer (Angle)	
	N16-0060-46	Spring washer (Angle)	
	N32-2605-45	Flat screw (Case)	
	N35-3006-45	Bind screw (Foot)	
	N87-2806-46	Self tapping screw	
	N87-3006-46	Self tapping screw	
	N99-0304-04	Allen head bolt M4 × 6 (Angle)	
	S50-1406-05	Tact switch	
	T91-0315-05	Microphone (T)	☆
	T91-0316-05	Microphone (K)(W)	☆
	W01-0401-04	Allen key (Angle)	
	W02-0317-05	Rotary encoder	☆
	X54-1590-00	Digital unit	☆

Digital Unit (X54-1590-00)

Ref. No	Parts No	Description	Re- marks
C1	CE04W1A221M	E 220 μ F 10V	
C2	C91-0456-05	C 0.047 μ F 25V	
C3	CE04W1A221M	E 220 μ F 10V	
C5	C91-0456-05	C 0.047 μ F 25V	
C6	CE04W1A471M	E 470 μ F 10V	
C7	C91-0456-05	C 0.047 μ F 25V	
C8	CE04W1A101M	E 100 μ F 10V	
C9	C91-0456-05	C 0.047 μ F 25V	
C10	CE04W1A101M	E 100 μ F 10V	
C12	CC45CH1H270J	C 27 pF	
C13	CC45SL1H470J	C 47 pF	
C14	CC45SL1H331J	C 330 pF	
C16	CC45SL1H150J	C 15 pF	
C17	CC45SL1H070D	C 7 pF ± 0.5 pF	
C18	CC45SL1H221J	C 220 pF	
C19	CC45CH1H020C	C 2 pF ± 0.25 pF	
C20.21	CC45RH1H820J	C 82 pF	
C23	CC45CH1H010C	C 1 pF ± 0.25 pF	
C24	CC45SL1H101J	C 100 pF	
C25	CC45CH1H050D	C 5 pF ± 0.5 pF	
C27	CQ92MIH473K	ML 0.047 μ F 50V	
C28	CQ92MIH562K	ML 0.0056 μ F 50V	
C29	CQ92MIH123K	ML 0.012 μ F 50V	
C30	CQ92MIH562K	ML 0.0056 μ F 50V	
C31	CQ92MIH473K	ML 0.047 μ F 50V	
C32	C91-0456-05	C 0.047 μ F 25V	
C33	CE04W1A101M	E 100 μ F 10V	
C38	C91-0456-05	C 0.047 μ F 25V	
C43.44	CC45RH1H101J	C 100 pF	
C45.46	CC45CH1H020C	C 2 pF ± 0.25 pF	
C47	CC45RH1H101J	C 100 pF	
C49	C91-0456-05	C 0.047 μ F 25V	
C55	CC45SL1H151J	C 150 pF	
C56.57	CC45SL1H271J	C 270 pF	
C58	CC45SL1H151J	C 150 pF	
C59	C91-0456-05	C 0.047 μ F 25V	
C60	CC45SL1H101J	C 100 pF	
C61~63	C91-0456-05	C 0.047 μ F 25V	
C64	CE04W1A101M	E 100 μ F 10V	
C66	CC45RH1H470J	C 47 pF	
C67	CC45RH1H330J	C 33 pF	
C68	CC45RH1H120J	C 12 pF	
C69	CC45RH1H050C	C 5 pF ± 0.25 pF	
C71.72	CC45SL1H330J	C 33 pF	
C73	CC45SL1H100D	C 10 pF ± 0.5 pF	
C74	CC45SL1H330J	C 33 pF	
C75	CC45SL1H120J	C 12 pF	
C76	CC45SL1H150J	C 15 pF	
C79	C91-0456-05	C 0.047 μ F 25V	
C84	CE04W1A101M	E 100 μ F 10V	
C85	C91-0456-05	C 0.047 μ F 25V	
C86	CQ92MIH104K	ML 0.1 μ F 50V	
C87	CQ92MIH102K	ML 0.001 μ F 50V	
C88	CC45SL1H101J	C 100 pF	
C89	CE04W1A101M	E 100 μ F 10V	
C90	C91-0456-05	C 0.047 μ F 25V	
C91	CC45SL1H101J	C 100 pF	
C92	CE04W1H010	E 1 μ F 50V	
C93	C91-0456-05	C 0.047 μ F 25V	
C94	CE04W1A101M	E 100 μ F 10V	
C95.96	CC45SL1H330J	C 33 pF	
C98	CQ92M1H222K	ML 0.0022 μ F 50V	
C99	CQ92M1H104K	ML 0.1 μ F 50V	
C100	CE04W1A101M	E 100 μ F 10V	
C101	C91-0456-05	C 0.047 μ F 25V	

PARTS LIST

Ref No	Parts No.	Description	Re- marks
C103	CE04W1A101M	E 100 μ F 10V	
C104	C91-0456-05	C 0.047 μ F 25V	
C105	CC45RH1H100D	C 10 pF \pm 0.5 pF	
C106	CC45RH1H680J	C 68 pF	
C107	CC45RH1H470J	C 47 pF	
C108	CC45RH1H050C	C 5 pF \pm 0.25 pF	
C112	C91-0456-05	C 0.047 μ F 25V	
C113	CC45SL1H470J	C 47 pF	
C114	CC45SL1H101J	C 100 pF	
C115	CC45SL1H470J	C 47 pF	
C120	CC45SL1H150J	C 15 pF	
C121,122	C91-0456-05	C 0.047 μ F 25V	
C123	CE04W1A101M	E 100 μ F 10V	
C124~126	C91-0456-04	C 0.047 μ F 25V	
C127	CQ92M1H472K	ML 0.0047 μ F 50V	
C128	CE04W1E100M	E 10 μ F 25V	
C129,130	C91-0456-05	C 0.047 μ F 25V	
C131	C91-0457-05	C 0.022 μ F 25V	
C132	C91-0456-05	C 0.047 μ F 25V	
C133,134	C91-0457-05	C 0.022 μ F 25V	
C137	C91-0456-05	C 0.047 μ F 25V	
C143	CE04W1A470M	E 47 μ F 10V	
C145,146	CE04W1E100M	E 10 μ F 25V	
C152	CE04W1A470M	E 47 μ F 10V	
C155	C91-0457-05	C 0.022 μ F 25V	
C167	C90-0817-05	E 1000 μ F 10V	
C168	CE04W1E100M	E 10 μ F 25V	
C171	C91-0456-05	C 0.047 μ F 25V	
C172	CS15E1E010M	T 1 μ F 25V	
TC1.2	C05-0029-15	Ceramic trimmer 40 pF	
	E04-0154-05	Coax connector	
	E06-0853-05	8P male socket (MIC)	☆
	E13-0163-05	1P pin jack CAL	
	E23-0046-04	Square terminal	
	E40-0273-05	Mini connect wafer 2P	
	E40-0373-05	Mini connect wafer 3P	
	E40-0374-05	Mini connect wafer 3P L type	
	E40-0473-05	Mini connect wafer 4P	
	E40-0474-05	Mini connect wafer 4P L type	
	E40-0573-05	Mini connect wafer 5P	
	E40-0574-05	Mini connect wafer 5P L type	
	E40-0673-05	Mini connect wafer 6P	
	E40-0773-05	Mini connect wafer 7P	
	E40-0774-05	Mini connect wafer 7P L type	
	F20-0516-05	Insulating sheet	
	F29-0014-05	Shoulder washer	
	J31-0517-05	Spacer	
L1	L15-0016-05	Choke coil	
L2,3	L40-1011-04	Ferri-inductor 100 μ H	
L4	L40-4711-03	Ferri-inductor 470 μ H	
L6,7	L40-3325-04	Ferri-inductor 3.3 mH	
L8	L40-4711-03	Ferri-inductor 470 μ H	
L9~11	L40-1011-03	Ferri-inductor 100 μ H	
L12	L40-1501-03	Ferri-inductor 15 μ H	
L13~15	L40-4711-03	Ferri-inductor 470 μ H	
L16	L32-0636-05	Oscillating coil	
L17,18	L40-1021-03	Ferri-inductor 1 mH	
L19	L40-4711-03	Ferri-inductor 470 μ H	
L20	L40-1501-03	Ferri-inductor 15 μ H	
L21	L40-1021-03	Ferri-inductor 1 mH	
L22	L40-1511-03	Ferri-inductor 150 μ H	

Ref. No.	Parts No.	Description	Re- marks
L23	L32-0193-05	Oscillating coil	
L24,25	L40-1001-03	Ferri-inductor 10 μ H	
L26~31	L40-4711-03	Ferri-inductor 470 μ H	
T1,2	L34-0996-05	Tuning coil 4.5 MHz	
T3~5	L34-0991-05	Tuning coil 470 kHz	
T6~8	L34-0996-15	Tuning coil 4.5 MHz	
CF1	L72-0321-05	Ceramic filter CFW470C	
X1	L77-0482-05	Crystal 10 MHz	
VR1,2	R12-6401-05	Trim pot 470 k Ω	
VR3	R12-5030-05	Trim pot 100 k Ω	
RB1	R90-0522-05	Resistor block 47 k Ω \times 6	
RB2	R90-0509-05	Resistor block 22 k Ω \times 5	
RB3	R90-0515-05	Resistor block 10 k Ω \times 4	
	R92-0150-05	Short jumper	
S1,2	S40-2422-05	Push switch RIT, MEMORY/VFO	☆
S3,4	S59-1405-05	Tact switch M IN, MR	
S5,6	S50-1403-05	Tact switch UP/DOWN	
S7	S01-2428-05	Rotary switch MEMORY CH	☆
S8,9	S40-2422-05	Push switch RCV, XMIT	☆
RL1	S51-1404-05	Relay G2E	
BZ1	T95-0052-05	Transducer	