


CRT ADAPTER



MODEL CR-29

ASSEMBLY WITH WIRES — 527-087-9-001

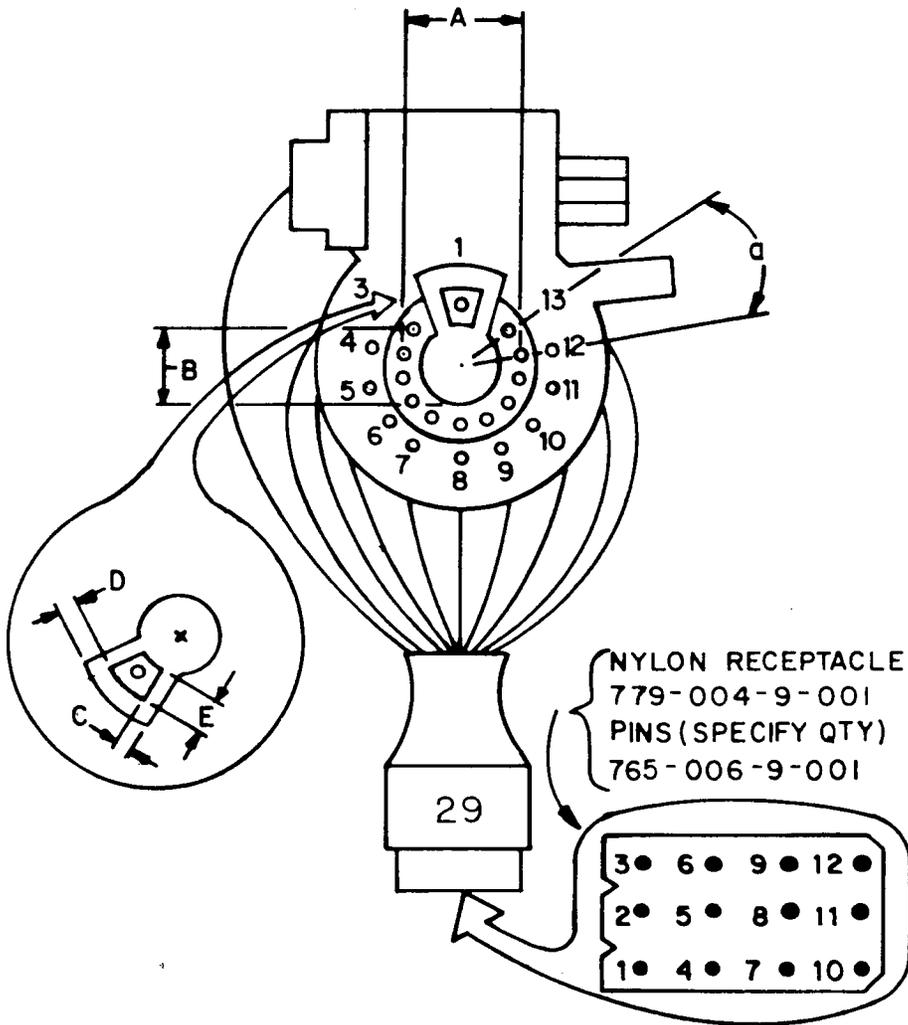

NOTE: NO CONTACTS AT PIN POSITIONS 3 AND 13.

WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEPTACLE
1	BLK	12
2	keyway	—
3	—	—
4	YEL/BLU	9
5	YEL/GRN	N.C.
6	GRN	10
7	YEL/RED	1
8	RED	N.C.
9	WHT	2
10	BRN	3
11	BLUE	N.C.
12	WHT/RED	6
13	—	—
14	keyway	—

FITS CRT DIMENSIONS:

- A = pin circle diameter = 15.24 mm/0.600" nom.
- a = angular pin spacing = 25-5/7°
- B = post diameter = 11.0 mm/0.433" max.
- C = keyway width = 1.52 mm/0.060" nom.
- D = keyway width = 1.27 mm/0.050" nom.
- E = keyway depth = 5.59 mm/0.220" min.



B & K-Precision, Factory Service Department
 Maxtec International Corporation
 6470 West Cortland Street
 Chicago, Illinois 60635
 Telephone: (312) 889-1448

Used with B & K-Precision Models: 467, 470, 480, 490

TUBE TYPE	HEATER VOLTAGE
6ABP1	6.3
6ABP55	6.3
6ABP56	6.3
A13ABQ0GJ	6.3

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the **B & K-Precision** chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRT's that have come out since the last mailing.

If you wish to take advantage of this service, contact:

B & K-PRECISION, Factory Service Department
Maxtec International Corporation
6470 West Cortland Street
Chicago, Illinois 60635
Telephone #: (312) 889-1448

For information on ordering a subscription.



