


ALIGNMENT PROCEDURE FOR THE SKY-BUDDY MODEL 5T

I. F. ALIGNMENT

- 1 AFTER REMOVING THE GRID CAP OF THE 6A7 TUBE CONNECT THE SIGNAL GENERATOR TO THIS TUBE, GROUND OF THE GENERATOR TO CHASSIS.
- 2 SET GENERATOR TO 465 KC; SET TUNING GANG TO MINIMUM CAPACITY.
- 3 HAVE BAND SWITCH SET FOR #1 BAND.
- 4 LEAVE VOLUME CONTROL ON FULL; A.V.C. SWITCH IN "OFF" POSITION.
- 5 WITH AN INSULATED SCREW DRIVER ADJUST THE TRIMMERS ON THE 1ST AND 2ND I.F. TRANSFORMERS UNTIL MAXIMUM SIGNAL STRENGTH IS SECURED. IF AN OUTPUT METER IS AVAILABLE CONNECT TO VOICE COIL LEADS OF THE SPEAKER OR FROM SCREEN TO PLATE OF THE 42 TUBE THROUGH A SUITABLE COUPLING CONDENSER.

R. F. ALIGNMENT

- 1 REMOVE SIGNAL GENERATOR LEAD FROM 6A7 TUBE; REPLACE GRID WIRE TO TUBE CAP; CONNECT SIGNAL GENERATOR TO ANTENNA (RED) WIRE.
- 2 BE SURE BAND SWITCH IS ON #1 BAND.
- 3 SET GENERATOR AND RECEIVER TO 1400 KC.
- 4 ADJUST 1400 KC OSCILLATOR TRIMMER LOCATED ON THE BOTTOM OF THE CHASSIS, AND SO INDICATED, FOR MAXIMUM SIGNAL.
- 5 SET GENERATOR AND RECEIVER TO 600 KC.
- 6 ADJUST 600 KC PAD LOCATED ON THE TOP OF THE CHASSIS FOR MAX SIGNAL.
- 7 TURN BAND SWITCH TO #2 BAND AND GO THROUGH THE ABOVE PROCEDURE FOR THE TWO FREQUENCIES INDICATED FOR THIS BAND - 4MC BELOW THE CHASSIS 1.8MC ON THE TOP.
- 8 TURN BAND SWITCH TO #3 BAND AND GO THROUGH THE ABOVE PROCEDURE - 14MC BELOW THE CHASSIS, AND THEN CHECK 6MC WITH THE GENERATOR. THERE IS NO LOW-FREQUENCY PAD ON THIS BAND. 6MC SHOULD FALL PLUS OR MINUS 1/2 TO 1 DIVISION NEAR 6MC WITH NO FURTHER ADJUSTMENT.

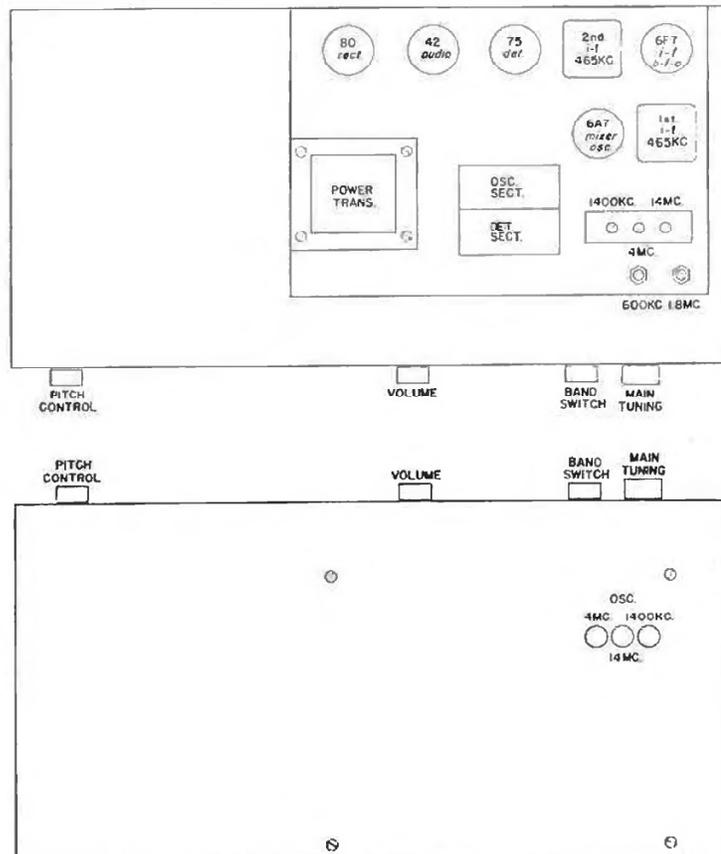

This manual is provided FREE OF CHARGE from the "BoatAnchor Manual Archive" as a service to the Boatanchor community.

It was uploaded by someone who wanted to help you repair and maintain your equipment.

If you paid anyone other than BAMA for this manual, you paid someone who is making a profit from the free labor of others without asking their permission.

You may pass on copies of this manual to anyone who needs it. But do it without charge.

Thousands of files are available without charge from BAMA. Visit us at <http://bama.sbc.edu>