



HEATHKIT AUDIO AMPLIFIER

MODEL A-9B

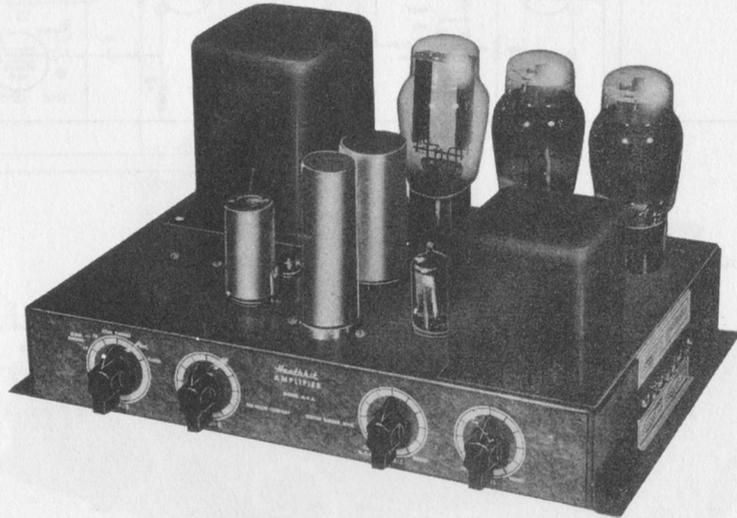

SPECIFICATIONS

Frequency Response.....	±1 db 20 to 20,000 cps
Power Output.....	20 watts
Total Harmonic Distortion.....	1% (at rated output)
Input Requirements (for 15 watts output)	
Magnetic Phono Input.....	0.007 volts
Microphone Input.....	0.01 volts
Crystal Phono Input.....	0.08 volts
Tuner Input.....	0.6 volts
Tone Controls	
Bass (at 30 cps).....	15 db boost, 15 db cut
Treble (at 15 kc).....	15 db boost, 20 db cut
Power Requirements.....	100 watts, 105-125 volts 50/60 cycle AC
Tube Complement.....	12AX7 magnetic phono preamplifier and input amplifier 12AU7 voltage amplifier and tone control amplifier 12AU7 voltage amplifier and phase splitter Two 6L6G push-pull pentode power amplifiers 5U4G Rectifier
Dimensions.....	14" x 8 7/8" x 7 3/8" high
Shipping Weight.....	23 lbs.

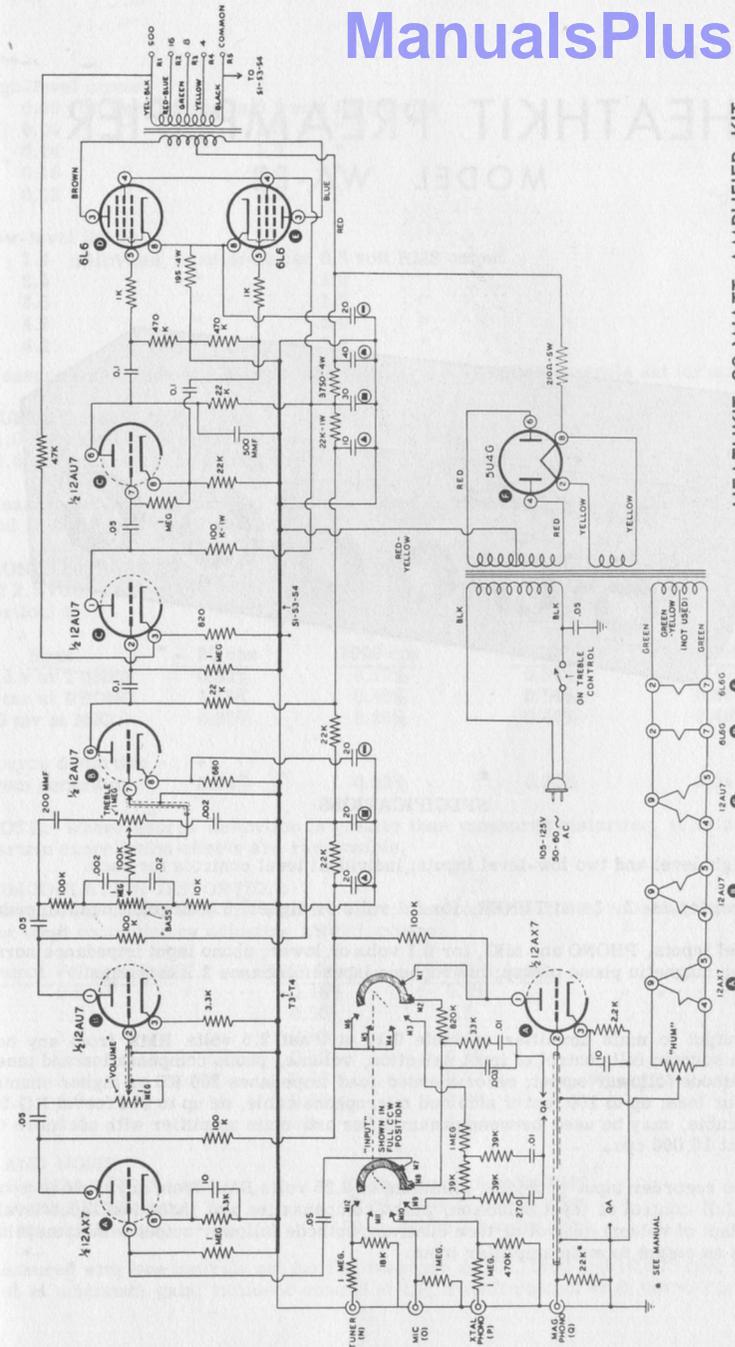

HEATHKIT 20-WATT AMPLIFIER KIT
Model A-9B

• SEE MANUAL