


POWER SUPPLY, CH-4, CH-10 & ATTENUATOR
MODEL 415 SWEEP/MARKER GENERATOR



1. CHECK ALL COMPONENTS, PARTS, ETC. A 10% TOLERANCE SHOULD BE USED UNLESS OTHERWISE SPECIFIED.
2. ALL RESISTORS ARE TO BE 1/4 WATT UNLESS OTHERWISE SPECIFIED.
3. ALL CAPACITORS ARE TO BE 50 VDC UNLESS OTHERWISE SPECIFIED.
4. ALL TUBES ARE TO BE 6X4, 6X5, 6X6, 6X8, 6X9, 6X4, 6X5, 6X6, 6X8, 6X9, 6X4, 6X5, 6X6, 6X8, 6X9.
5. ALL TUBES ARE TO BE 6X4, 6X5, 6X6, 6X8, 6X9, 6X4, 6X5, 6X6, 6X8, 6X9.
6. ALL TUBES ARE TO BE 6X4, 6X5, 6X6, 6X8, 6X9, 6X4, 6X5, 6X6, 6X8, 6X9.
7. ALL TUBES ARE TO BE 6X4, 6X5, 6X6, 6X8, 6X9, 6X4, 6X5, 6X6, 6X8, 6X9.
8. ALL TUBES ARE TO BE 6X4, 6X5, 6X6, 6X8, 6X9, 6X4, 6X5, 6X6, 6X8, 6X9.
9. ALL TUBES ARE TO BE 6X4, 6X5, 6X6, 6X8, 6X9, 6X4, 6X5, 6X6, 6X8, 6X9.
10. ALL TUBES ARE TO BE 6X4, 6X5, 6X6, 6X8, 6X9, 6X4, 6X5, 6X6, 6X8, 6X9.

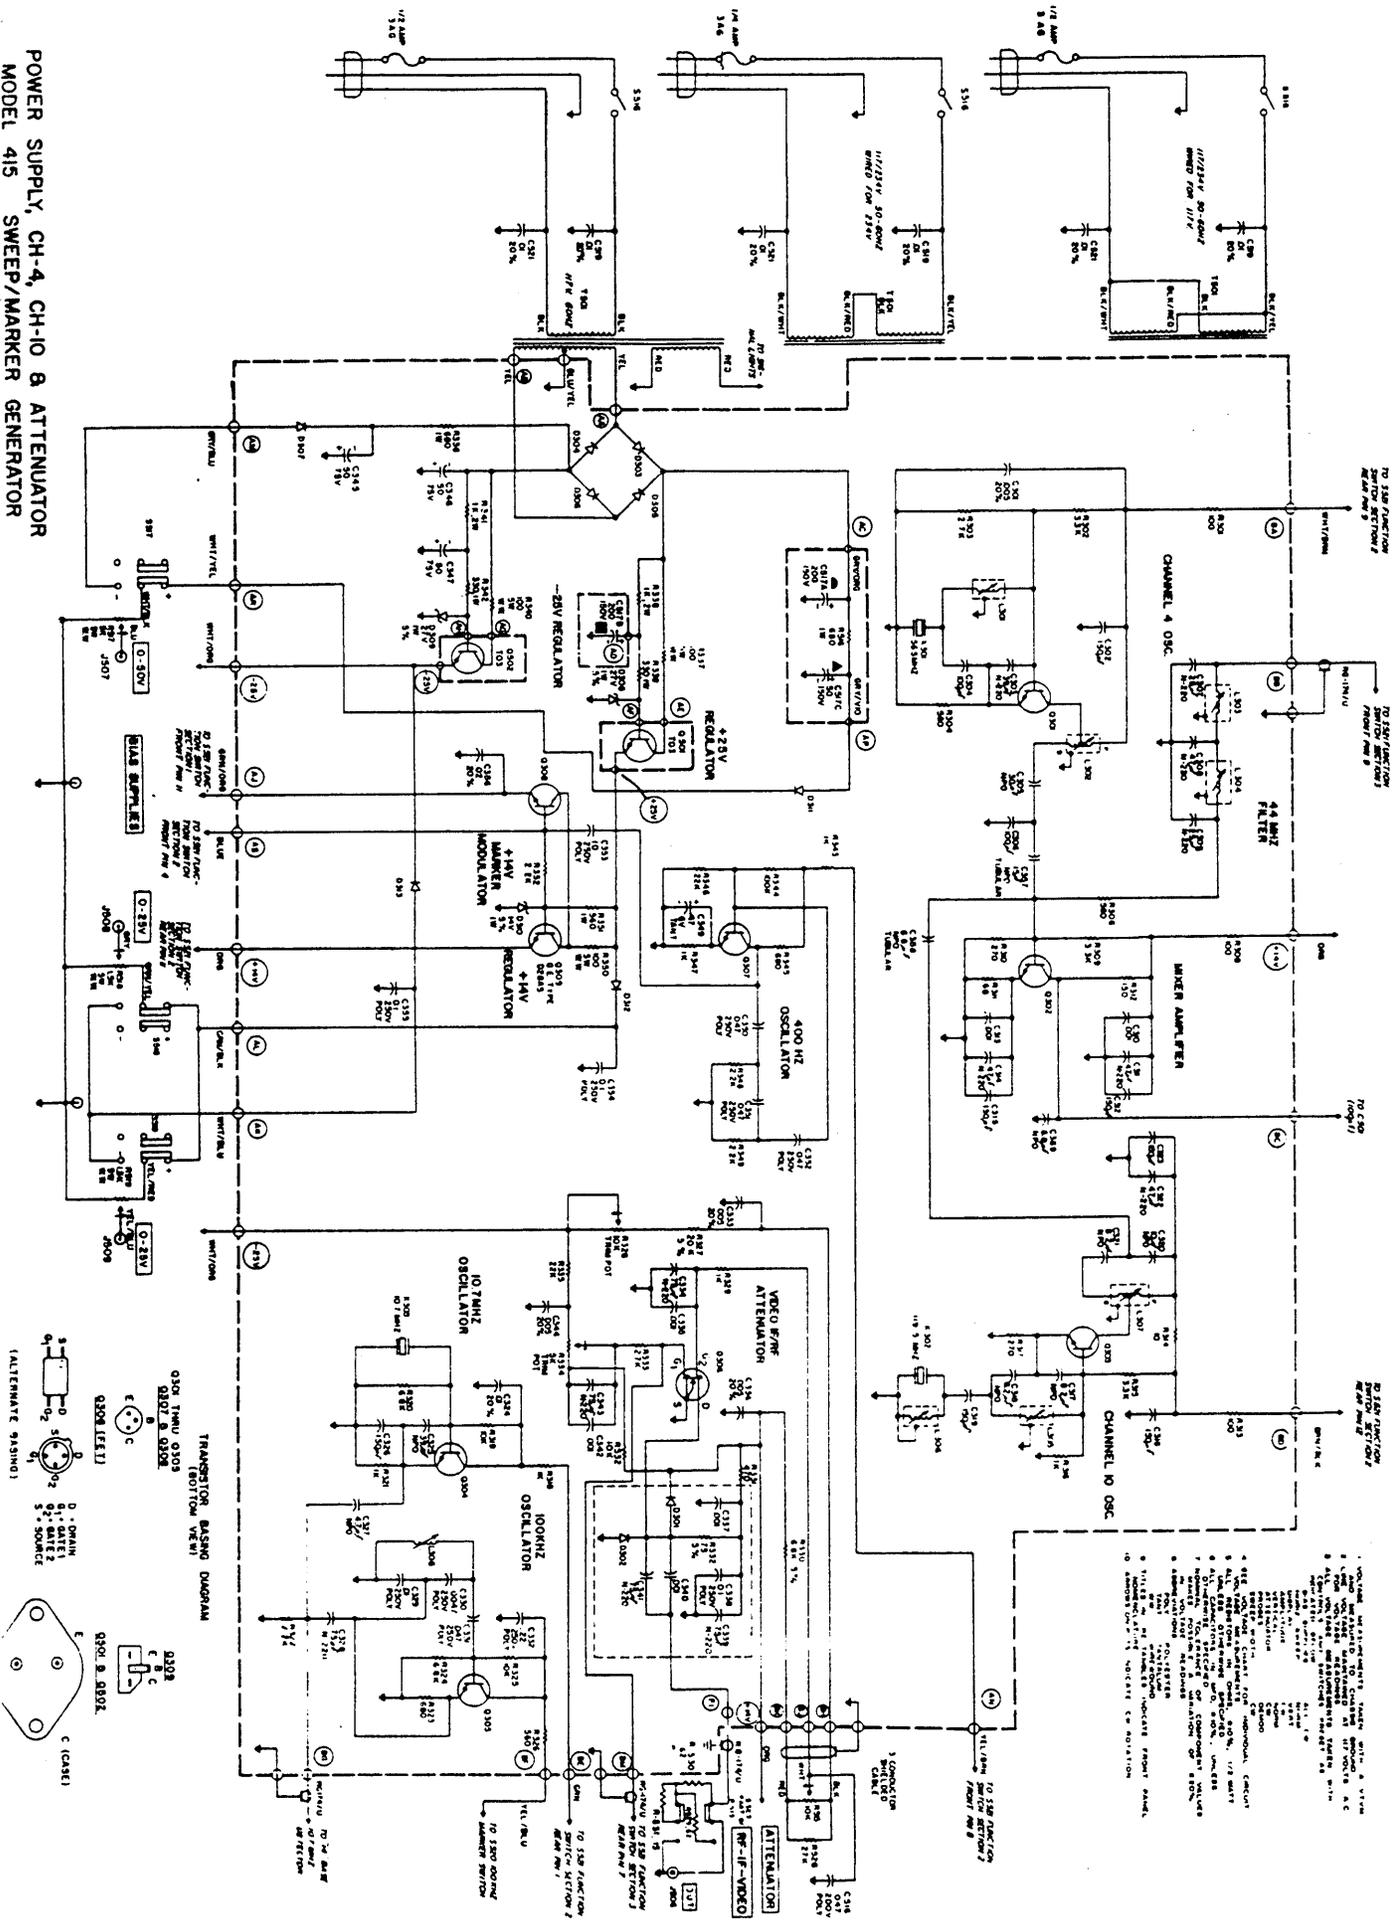