



# Handheld 3.3GHz Spectrum Analyzer

Optimum for  
evaluation of

- W-CDMA
- CDMA
- GSM
- PDC
- PHS
- Wireless LAN
- Bluetooth

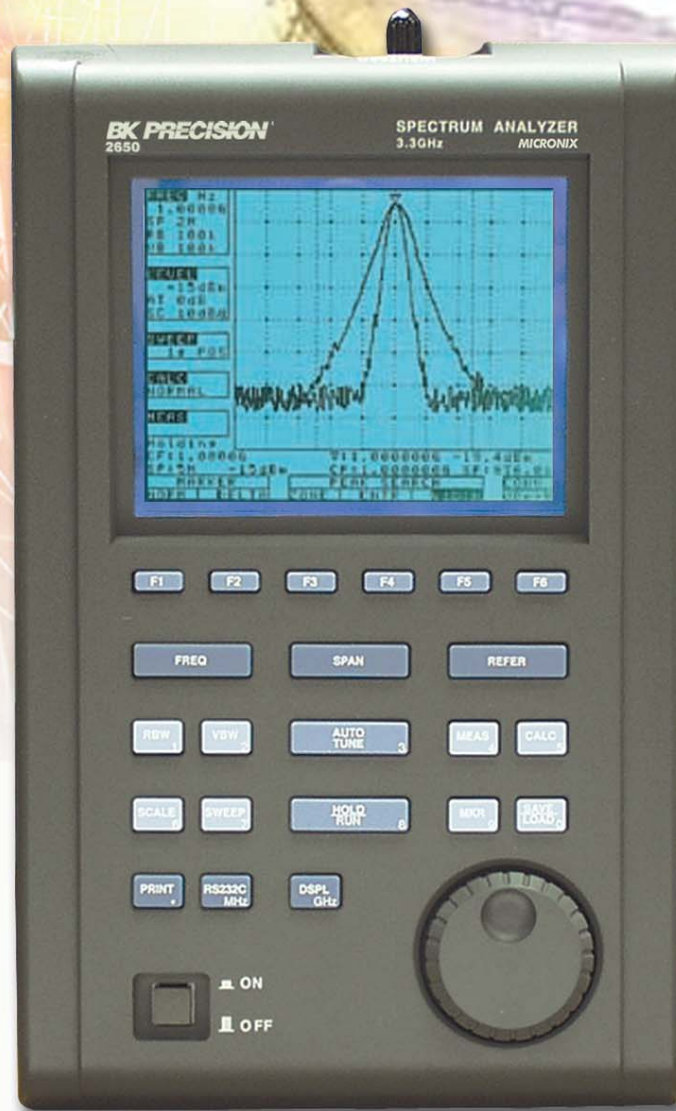

## 2650

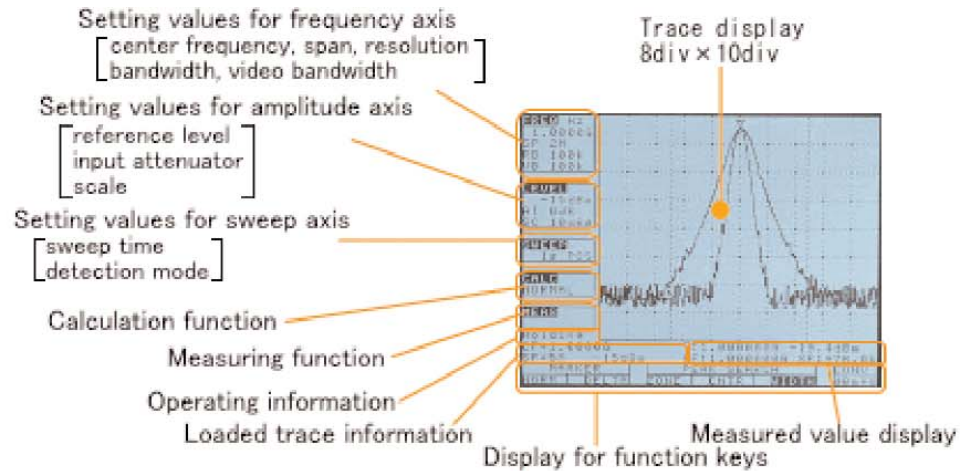

Function key

Frequency span  
200kHz to 2GHz,  
ZERO and FULL span.

Center frequency  
Sets center frequency  
in 100kHz resolution.

Video bandwidth  
100Hz to 300kHz and OFF.

Resolution bandwidth  
3kHz to 3MHz.

Sweep  
Sets 10ms to 30s sweep  
time and detection mode.

Scale  
2dB/div and 10dB/div.

RS-232C  
Sets baud rate and transfers  
a current or saved trace.

Print  
When pressing this key,  
the image is printed with  
a printer (optional) as it is.

Display control  
Sets contrast, backlight  
ON/OFF, brightness of  
backlight and invert display

Input connector  
SMA (J)

Input connector for  
DC power source  
Connects AC adaptor BC 2650

Reference level  
Sets +10 to -40dBm  
in 1dB step.

Measuring functions  
Available for Channel power,  
Adjacent channel power,  
Occupied bandwidth, Electric  
field strength and Magnetic  
field strength measurement.

Calculation functions  
Available for Max hold,  
Min hold, Average and  
Over write.

Save/Load  
Saves 100traces and  
100setups, and loads  
1trace and 1setup.


RS-232C connector  
9 pin D-sub connector  
to connect to an optional  
printer or PC.

Marker and peak search  
functions  
Displays the frequency and  
level at the marker point  
or between two markers.

Hold/Run  
Stops or restarts  
capturing data.

AUTO tuning  
Tunes to the maximum level  
spectrum within full bandwidth.

Rotary encoder

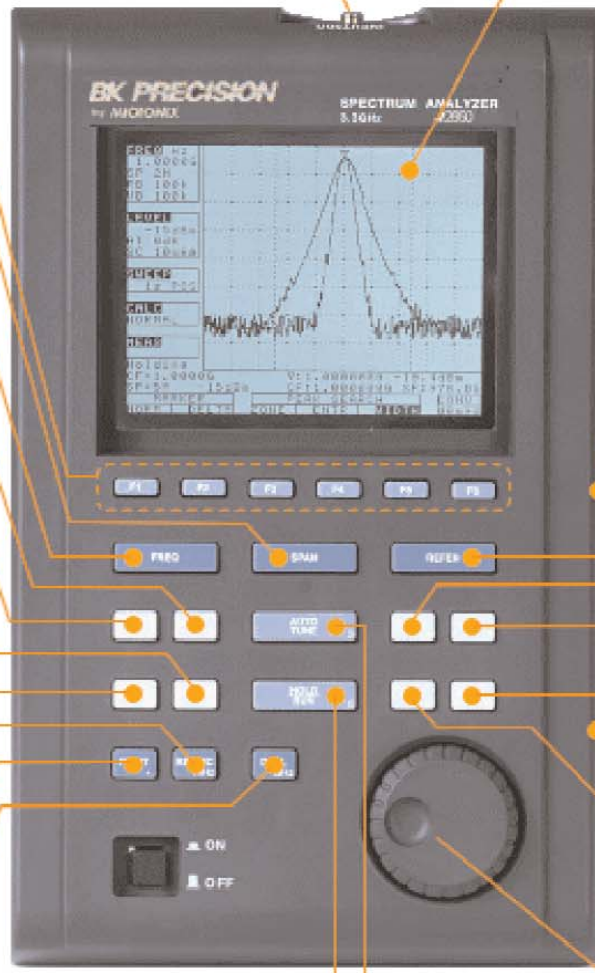

**1 Compact and lightweight 3.75 lb (1.7 kg)**

The dimensions are as small as WxHxD 6.4 x 2.75 x 10.25" (162 x 70 x 260 mm), and the weight is only 3.75 lb (1.7 kg) including the battery. It is very convenient for outdoor use and while on business trips.

**2 Measuring frequency range 50kHz to 3.3GHz**

This bandwidth covers those of W-CDMA, CDMA, PDC, PHS, GSM, 2.4GHz band wireless LAN, Bluetooth.

**3 Operation with battery for 100 minutes**

When the battery is fully charged, Model 2650 operates for about 100 minutes (with the back light turned off). It is extremely convenient for outdoor use and for measuring wireless LAN installation environment.

**4 Performance that is comparable to large-size bench type**

Model 2650 guarantees a highly stable frequency axis by PLL synthesizer system. The center frequency setting resolution is 100kHz. Furthermore, the average noise level of -110dBm (typical) provides a wide dynamic range and the reference level can be set in 1 dB step.

**5 Abundant functions**

- Measuring functions
  - Channel power measurement
  - Adjacent channel power measurement
  - Occupied bandwidth measurement
  - Electric field strength measurement
  - Magnetic field strength measurement
- Calculation functions
  - MAX HOLD
  - MIN HOLD
  - AVERAGE
  - OVER WRITE
- Marker and peak search
- Save / Load
  - Electric field strength meas. ... Optimum for measurement of cellular phone and wireless LAN working environment.
  - Magnetic field strength meas. ... Optimum for EMI design of PCBs and for evaluation of signal quality.

**6 Auto tuning**

The center frequency is set at the spectrum of the maximum level in the 3.3GHz band, and in addition, optimum reference level, resolution bandwidth, video bandwidth and sweep time are set when the AUTO TUNE key is pressed. This function is very convenient for measurement of an unknown signal.

**7 Auto range operation**

The resolution bandwidth, video bandwidth and sweep time are automatically set based on the frequency span. It is also possible to set auto range operation only one or two out of resolution bandwidth, video bandwidth and sweep time.

**8 Hard copy of the image**

Connect a printer (PT 2650 optional) and press the PRINT key on Model 2650. The image on the screen is printed as it is.

**9 High resolution display on the PC screen**


The spectrum waveform is displayed at high resolution, 1000 points in the horizontal axis, on the PC screen when "PC Software AK 2650" (optional) is used.



Model 2650 is a compact, lightweight, high performance spectrum analyzer that provides signal analysis and functionality comparable to larger bench type models.


### Channel power measurement

Measures the sum of the power in the zone specified by the zone center and zone width (slash area in figure). In short, it is possible to measure the total power in the specified frequency band. Of course it is possible to measure the noise power.



### Adjacent channel power measurement


Capable of measuring the adjacent channel power leakage as the ratio of the power in the range specified by offset frequency and bandwidth (slash area in figure) to the carrier wave power. Both the upper and lower side power leakage are measured.




Furthermore, the method for measurement may be selected out of three methods, i.e., total power method, reference level method and in-band method, from the classification of definition of carrier wave power.

### Magnetic field strength measurement

Model 2650 is capable of precisely measuring the magnetic field distribution on an LSI or a printed circuit board using magnetic field probe PR 26M (optional)

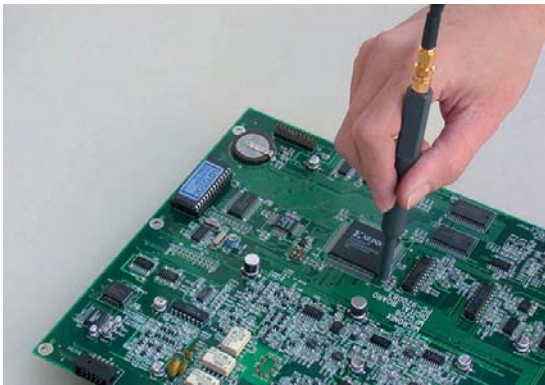


As the magnetic field detection portion of PR 26M is of a shielded loop structure that adopts glass ceramic multi-layer board technology of excellent high frequency characteristics, it is possible to take measurement at high reproducibility by detecting magnetic field components only. The measuring frequency range is as broad as 10MHz to 3GHz, and the measured value is calibrated in the instrument.

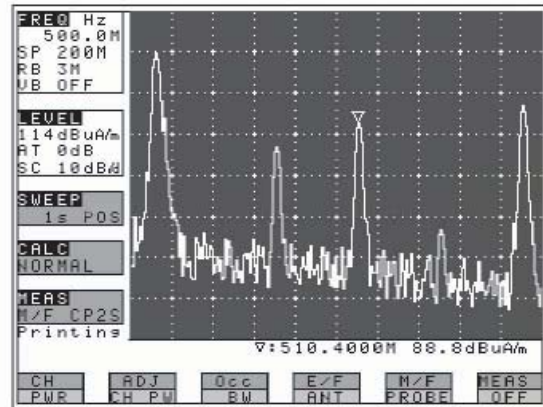

Evaluation of effectiveness of the bypass capacitor located at the power supply terminal of an LSI and evaluation of wiring rule on a printed circuit board can be raised as typical use of PR 26M. PR 26M is not affected by adjacent patterns because of high space resolution.

### Occupied bandwidth measurement


It is possible to measure the occupied frequency bandwidth as the bandwidth of the point that is lower by X (dB) than the peak level or as the bandwidth of the point of Y (%) of the total power.



**Electric field strength measurement**


It is possible to measure the electric field strength by connecting dipole antennas (optional) to the input connector. A dipole antenna that suits the use is available. AN301 is mainly for PDC 800MHz and GSM 900MHz band, AN302 is mainly for PDC 1500MHz band, AN303 is mainly for PHS, W-CDMA and GSM 1800 / 1900MHz band, and AN304 is mainly for 2.4GHz wireless LAN and Bluetooth. AN304 is capable of measuring direct sequence spread spectrum, frequency hopping and Bluetooth system by 10 ms sweep time and MAX HOLD function.

The conventional method covering low frequency through high frequency with a single antenna results in low antenna gain because of using a range deviating from the antenna resonance point, and the dynamic range largely worsens as a result.

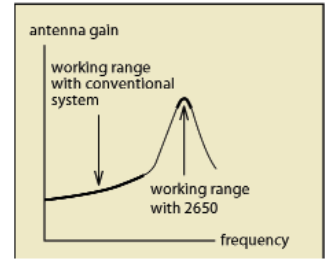


Model 2650, however, provides an antenna for each frequency band and uses a resonance point of high gain only, and accordingly, it is capable of securing a wide dynamic range. Antennas of other bands will be also prepared if requested.

As the electric field strength is calibrated for each antenna in Model 2650, it is possible to directly read the measured value.

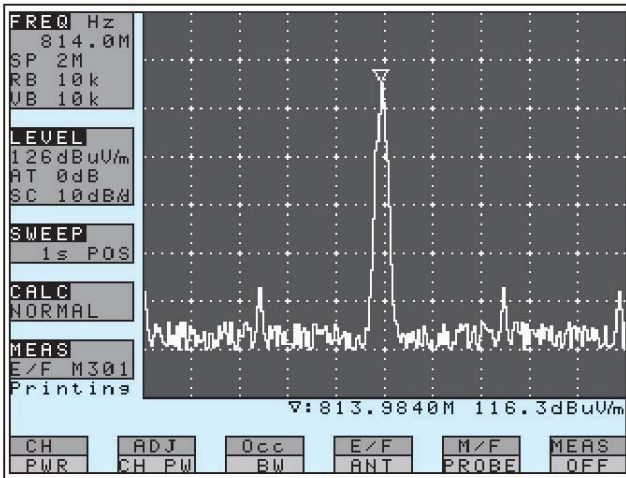


● Measurement of adjacent microstrip line

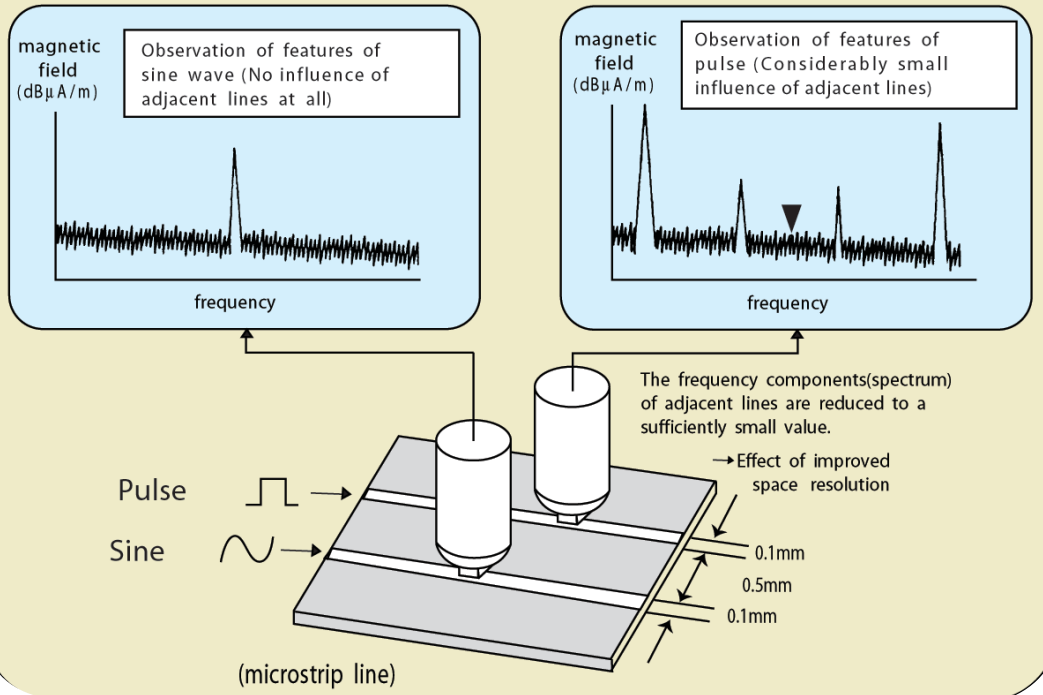

### Marker measurement


Two different modes are available for marker measurement. One is normal marker mode to measure and display the frequency (maximum effective number of digits : 7) and level (maximum effective number of digits : 3) of the marker point, and another is delta marker mode to measure and display the frequency difference and level difference between two markers (one of which is a reference marker).

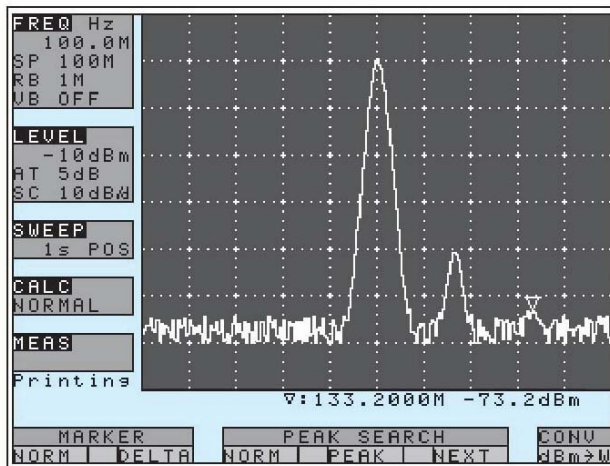


Normal marker measurement

### Peak search


Two different modes are available for peak search. One is normal peak search mode to search for the peak level with all of 10div of the frequency axis as the search range, and another is in-zone peak search mode to search for the peak level in the range specified by the center value and width. NEXT search (search for the next smaller level) of up to 9 is permitted in the normal peak search mode. The marker moves to the peak level at each sweep in the in-zone peak search mode.

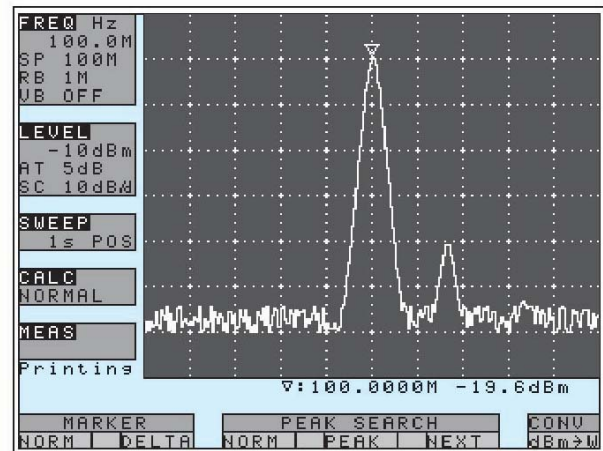

Normal peak search

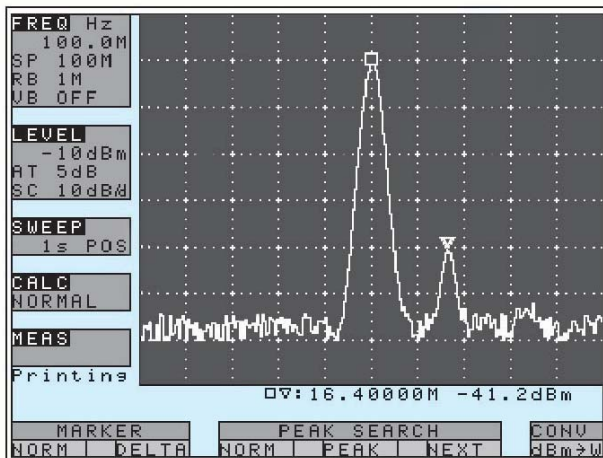


Delta marker measurement

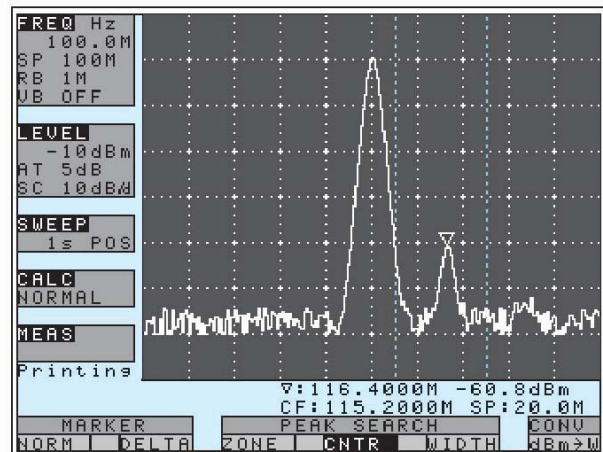

Zone peak search

**Auto tuning****2650**

The search for the signal of the maximum level in the 3.3GHz band is executed and the result is displayed in the specified frequency span when the AUTO TUNE key is pressed. The spectrum is tuned to the vicinity of the center of the screen, and the reference level, resolution bandwidth, video bandwidth and sweep time are automatically set at optimum values. This function is very convenient when used for measurement of an unknown signal.

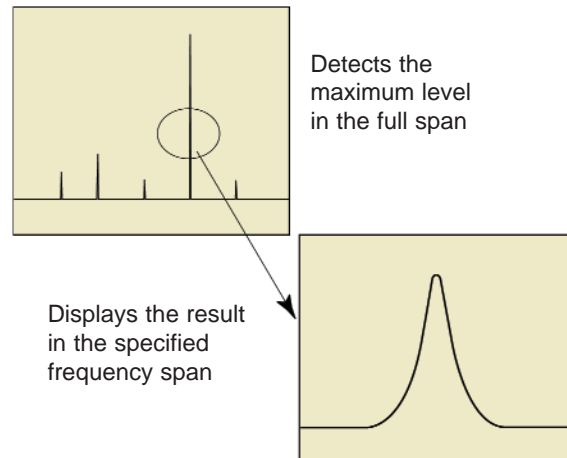
**Auto range****2650**

Resolution bandwidth, video bandwidth and sweep time are set automatically based on the specified frequency span. Furthermore, it is also possible to automatically set one or two of either resolution bandwidth, video bandwidth and sweep time.

The operator is released from troublesome operation because these three parameters that accompany the frequency span are set automatically.

**Save / Load****2650**

It is possible to save 100 traces and 100 setups. Using the optional AK 2650 software and interface cable. This function may be used when various data are acquired and they are evaluated later, or when it is wanted to make a comparison with formerly acquired data. The saved traces and setups can be transferred to a PC through RS-232C.

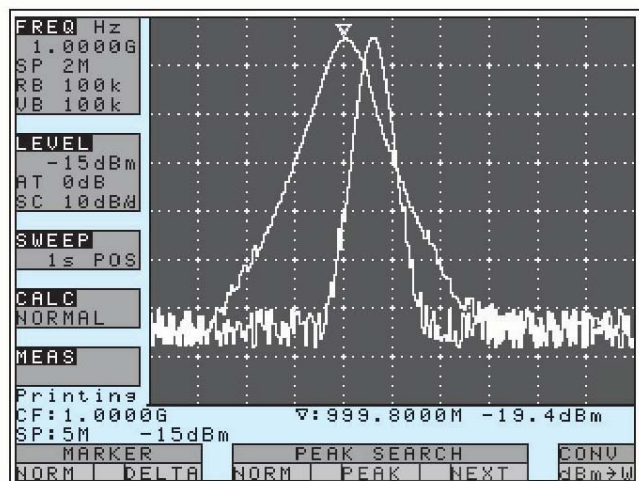


## Hard copy of display

2650

Hard copies of the image on the screen can be produced if a printer (model PT 21650, optional) is connected, using the RS-232C port.


Printing begins when the PRINT key is pressed. The printer is of dual power supply scheme, i.e., AC adaptor and battery, and it is possible to easily produce hard copies of measured data even outdoors where no AC power supply is available. The operating time of the battery-powered printer is about 30 minutes (when used continuously), and it is possible to produce about 80 hard copies of images on the screen.

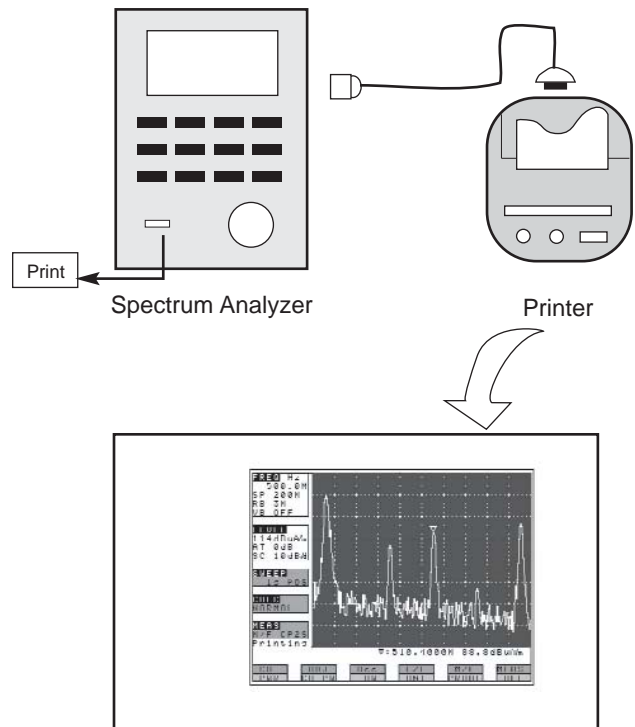

## High resolution display on the PC screen


2650

Although the spectrum is displayed by 250 points on the horizontal axis on the spectrum analyzer screen, it is fetched by 1000 points per sweep in the instrument. When PC Software (AK 2650, optional) is used, all of these 1000 points are transferred to a PC (the maximum transfer rate is 38,400 bps) and are displayed on the PC screen. The image, therefore, becomes clearer. Furthermore, setup of spectrum analyzer can be made from the PC side.

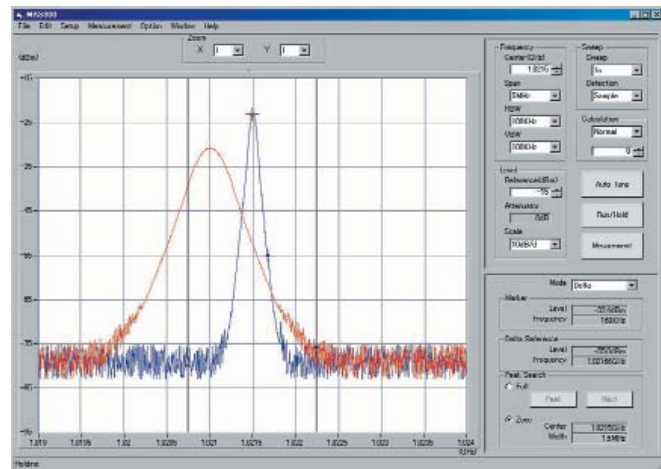

### Max hold

The update spectrum data is compared with that of last time for each point of the X-axis, and the larger one is retained and displayed. The number of times of sweep can be set in the range from 2 to 1024 times by steps, which is a power of 2, or by infinite. It is possible to observe burst signal and frequency drift.

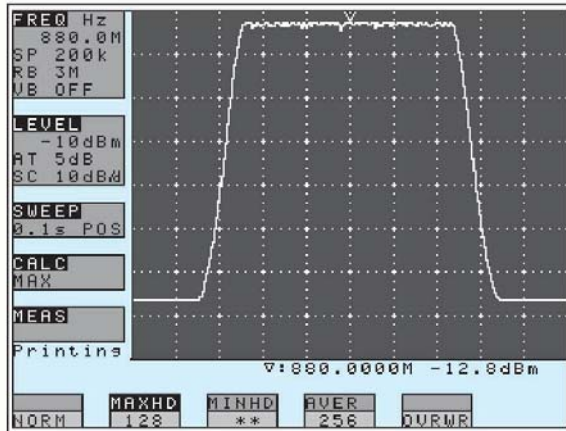


### Min hold

The update spectrum data is compared with that of last time for each point of the X-axis, and the smaller one is retained and displayed. The number of times of sweep can be set in the range from 2 to 1024 times by steps, which is a power of 2, or by infinite.


### Average

Simple averaging processing is executed at each sweep. The number of times of averaging can be set from a range of 2 to 256 times by steps, which is a power of 2. The signal components buried in the noise can be measured.

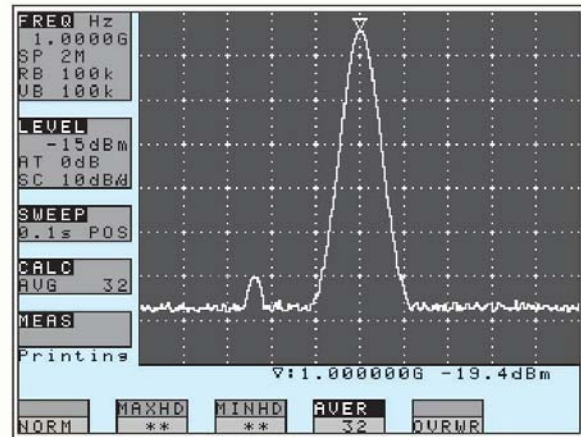

### Over write

The image on the screen is not cleared for each sweep, and overwriting display is executed. It is, therefore, possible to observe the process of changes in the signal.

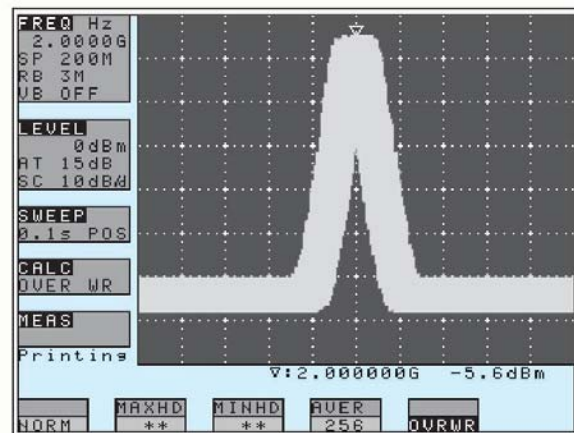

**Standard accessories** 2650

- AC Adaptor  
BC 2650  

- Ni-MH battery  
BP 2650  


- Soft carrying case  
LC 2650  

- Accessory pouch  

- Fuse  
● Operating manual


**Optional accessories** 2650

● Dipole antenna




AN 301 AN 302 AN 303 AN 304 AN 305

● Magnetic field pole  
PR 26M





(with dedicated double shielded coaxial cable)

● Coaxial adaptor kit  
CT 2701




● SMA to BNC Connector  
AD 26






● PC software  
Ak 2650



● Printer  
PT 2650




(with AC adaptor  
4 pcs of batteries  
a roll paper)

● SMA coaxial cable  
DC to 10GHz (VSWR < 1.5)  
Cable Terminations are SMA(P) to [see below](#)

CC 301: 1.6 ft	SMA(P)
CC 302: 3.2 ft	SMA(P)
CC 303: 4.92 ft	SMA(P)
CC 304: 6.5 inches	N(J)
CC 305: 6.5 inches	N(P)
CC 306: 6.5 inches	BNC(J)
CC 307: 6.5 inches	BNC(P)

● Roll paper for printer  
PX 2650



**Specifications for optional accessories** 2650

■ **Magnetic Field Probe Model PR 26M**

Items	Specifications
Frequency Range	10MHz to 3GHz
Space Resolution	approx. 0.25mm (depending on objects)
Dimensions	Outside: 12Δ x 135mm Probe tip: 2mm (W) x 1mm (T)
Connector	SMA(P)

■ **Printer**

Items	Specifications
Printing method	Thermal serial dot method
Paper	80mm width thermal paper
Power source	internal: alkaline battery (4pcs) External: DC6V/1.5A
Dimensions	(WxHxD) 134 x 58 x 180mm
Weight	approx. 550g (mainframe only)

■ **Dipole Antennas (antenna gain and VSWR are specified at a center of frequency range)**

Items	AN 301	AN 302	AN 303	AN 304	AN 305
Frequency Range	0.8 to 1GHz	1.25 to 1.65GHz	1.7GHz to 2.2GHz	2.25GHz to 2.65GHz	390 to 410MHz
Antenna Gain	>1dBi	>1dBi	>1dBi	>1dBi	>1dBi
VSWR	<1.5	<1.5	<1.5	<1.5	<1.5
Dimensions	7.5Δ x 250mm	7.5Δ x 250mm	7.5Δ x 250mm	7.5Δ x 250mm	7.5Δ x 250mm
Weight (approx.)	20g	20g	20g	20g	20g

# Specifications

## ■ Frequency Section

Frequency range 50kHz to 3.3GHz

### Center frequency

Setting resolution	100kHz (Allows rotary encoder, numeric key and function key)
Accuracy	within $\pm(30+100T)$ kHz $\pm 1$ dot (frequency span: 200kHz to 10MHz, RBW : 30kHz, 23 $\pm 5^{\circ}$ C) within $\pm(100+700T)$ kHz $\pm 1$ dot (frequency span : 20MHz to 3.3GHz, RBW : 100kHz, 23 $\pm 5^{\circ}$ C) T : Sweep time (s)
RBW frequency error	within $\pm 6\%$ of RBW (RBW : 3kHz, 30kHz) within $\pm 30\%$ of RBW (RBW : 100kHz to 3MHz)
Frequency span	
Setting range	0Hz (zero span), 200kHz to 2GHz (1-2-5step) and 3.3GHz (full span)
Accuracy	within $\pm 3\% \pm 20$ TkHz $\pm 1$ dot (Frequency span : 200kHz to 10MHz, 23 $\pm 5^{\circ}$ C) within $\pm 3\% \pm 200$ TkHz $\pm 1$ dot (Frequency span : 20MHz to 3.3GHz, 23 $\pm 5^{\circ}$ C) T : Sweep time (s)
Display resolution	Frequency span/250 Frequency span/1000 (only the measurement by RS-232C communication)
Display dot number	251dots, 1001dots (only the measurement by RS-232C communication) (The unit displays data in 251 horizontal dots, but it internally captures the trace in 1001 dots)

### Resolution bandwidth

Setting range	3kHz to 3MHz (1-3step) and AUTO
Accuracy	within $\pm 20\%$
Selectivity	1 : 12 (typical, 3dB : 60dB)

### Video bandwidth

Setting range	100Hz to 300Hz (1-3step), OFF and AUTO
SSB Phase noise	-90dBc / Hz (typical, 100kHz offset, RBW : 3kHz, VBW 100Hz, Sweep time : 0.3s)
Spurious response	less than -60dBc
Harmonics	less than -40dBc (50kHz to 100MHz) less than -45dBc (100MHz to 3.3GHz)

## ■ Amplitude Section

### Reference level

Setting range	+10 to -40dBm (1dB step)
Accuracy	within $\pm 0.8$ dB $\pm 1$ dot (center frequency : 100MHz, RBW : 3MHz, VBW : OFF, ATT : 0dB, 23 $\pm 5^{\circ}$ C)
Unit	dBm, dBV, dBmV, dB $\mu$ V, dB $\mu$ V/m, dB $\mu$ A/m (dB $\mu$ V/m and dB $\mu$ A/m is used the measuring function)
Average noise level	-110dBm (typical, center frequency : 100MHz RBW : 3kHz, VBW : 100Hz)
Frequency	within $\pm 2.0$ dB $\pm 1$ dot (50kHz to 100MHz)
Characteristic	within $\pm 1.0$ dB $\pm 1$ dot (100MHz to 3.3GHz)
Input impedance	50ohm
Input VSWR	less than 2.0
Input attenuator	
Operating range	0 to 25dB (1dB step), coupled with reference level
Switching error	within $\pm 0.6$ dB
RBW switching error	within $\pm 0.6$ dB
Display resolution	0.4dB (10dB/div), 0.08(2dB/div)
Display dot number	200dot
Display scale	
Scale	10dB / div, 2dB / div
Accuracy	within $\pm 0.2$ dB / 2dB $\pm 1$ dot within $\pm 0.8$ dB / 10dB $\pm 1$ dot within $\pm 1.6$ dB / 70dB $\pm 1$ dot
Input damage level	+20dBm (CW average power), 25VDC
Input connector	SMA (J)

## ■ Sweep Section

Sweep time	
Range	10ms to 30s (1-3step, frequency span : 0 to 2GHz) and AUTO 30ms to 30s (1-3step, frequency span : full span) and AUTO
Accuracy	within $\pm 0.1\% \pm 1$ dot ( frequency span : 0 to 2GHz) within $\pm 1.5\% \pm 1$ dot ( frequency span : full span)
Trigger mode	AUTO (frequency span : zero span)
Detection mode	Positive peak, Negative peak, Sample (when sweep time is 10ms or 30ms, only Sample can be set)

## ■ Functions

Marker	NORM : displays frequency (7 digits max) and level (4 digits max) at marker point. DELTA : displays difference frequency and level between 2 markers.
Peak search	NORM : searches a peak point within 10div. Available NEXT peak (10max). ZONE : searches a peak point within a zone designated by center and width. Marker moves to a peak point each sweep.
Calculation	NORM, MAX HOLD, MIN HOLD, AVERAGE, OVER WRITE * MAX/MIN HOLD : 2 to 1024 times, AVERAGE : 2 to 256
Measuring	Channel power, Adjacent channel power, Occupied frequency bandwidth, Electric field strength (needs optional antenna), Magnetic field strength (needs optional magnetic field probe) measurement.
AUTO tuning	When pressing AUTO TUNE key, the maximum level spectrum within 3.3GHz bandwidth is adjusted to center, and reference level, RBW, VBW and sweep time are adjusted to optimum values.
Save / Load	
Save	Saves 100 traces and 100 setups
Load	Loads 1 trace and 1 setup

## ■ General

Communication	
Interface	RS-232C
Baud rate	2,400 to 38,400bps
Hard copy	Allows direct hard copy with an optional printer
Display	
Display	LCD
Backlight	CFL backlight
Resolution	320 (H) _ 240 (V) dots
Power source	
Battery	Ni-MH Battery (included)
External DC	Pin jack, DCSV / 4A (BC 2650 included)
Other	
Operating temperature	0 to 40°C (Guaranteed at 23 $\pm 10^{\circ}$ C, without soft carrying case)
Operating humidity	less than 40°C / 80%RH (Guaranteed at less than 33°C / 70%RH, without soft carrying case)
Storage temperature	-20 to 60°C, less than 60°C / 70%RH
Dimensions	(WxHxD) 6.4 x 2.75 x 10.25 (162 _ 70 _ 260 mm)
Weight (approx.)	3.75 lb. (1.7kg) included battery 3.3 lb. (1.5kg) without battery

## B&K Precision Corporation

22820 Savi Ranch Parkway, Yorba Linda, CA 92887  
Tel: 714-921-9095, Fax: 714-921-6422  
www.bkprecision.com

Specifications subject to change without notice