


POWER RESISTOR SWITCHING			POWER RESISTOR SWITCHING		
R x 1			R x 100		
POS.	VALUE	WATTS	POS.	VALUE	WATTS
1	2.5	20	1	250	18
2	5.0	30	2	500	21
3	7.5	40	3	750	28
4	10.0	30	4	1000	21
5	15.0	25	5	1500	17.5
6	25	20	6	2500	14
7	50	20	7	5000	14
8	75	30	8	7500	21
9	100	40	9	10 K	28
10	150	30	10	15 K	21

ELECTROLYTIC SWITCHING		
POS.	A	B
1	200, 450 V	35, 450 V
2	100, 450 V	140, 450 V
3	50, 450 V	60, 450 V
4	20, 450 V	35, 450 V
5	10, 450 V	15, 450 V
6	5, 450 V	7, 450 V
7	2, 450 V	3, 450 V
8	500, 75 V	500, 75 V
9	1000, 75 V	1500, 75 V
10	2000, 75 V	500, 75 V

- NOTES:
1. TOLERANCE ON ALL RESISTORS AND CAPACITORS (EXCEPT ELECTROLYTICS) IS $\pm 10\%$.
 2. TOLERANCE ON ELECTROLYTICS IS $\pm 80\% - 20\%$.
 3. VOLTAGE RATING FOR ALL CAPACITORS (EXCEPT ELECTROLYTICS) IS 500V. UNLESS OTHERWISE SPECIFIED.
 4. VOLTAGE RATING FOR ALL ELECTROLYTIC CAPACITORS IS 450V. UNLESS OTHERWISE SPECIFIED.
 5. ALL ROTARY SWITCHES SHOWN IN FULL COUNTERCLOCKWISE POSITION.
 6. THIS SCHEMATIC SUBJECT TO CHANGE WITHOUT NOTICE.
 7. TITLES IN RECTANGLES DENOTE FRONT PANEL NOMENCLATURE.
 8. ALL CAPACITOR VALUES ARE IN MICROFARADS.

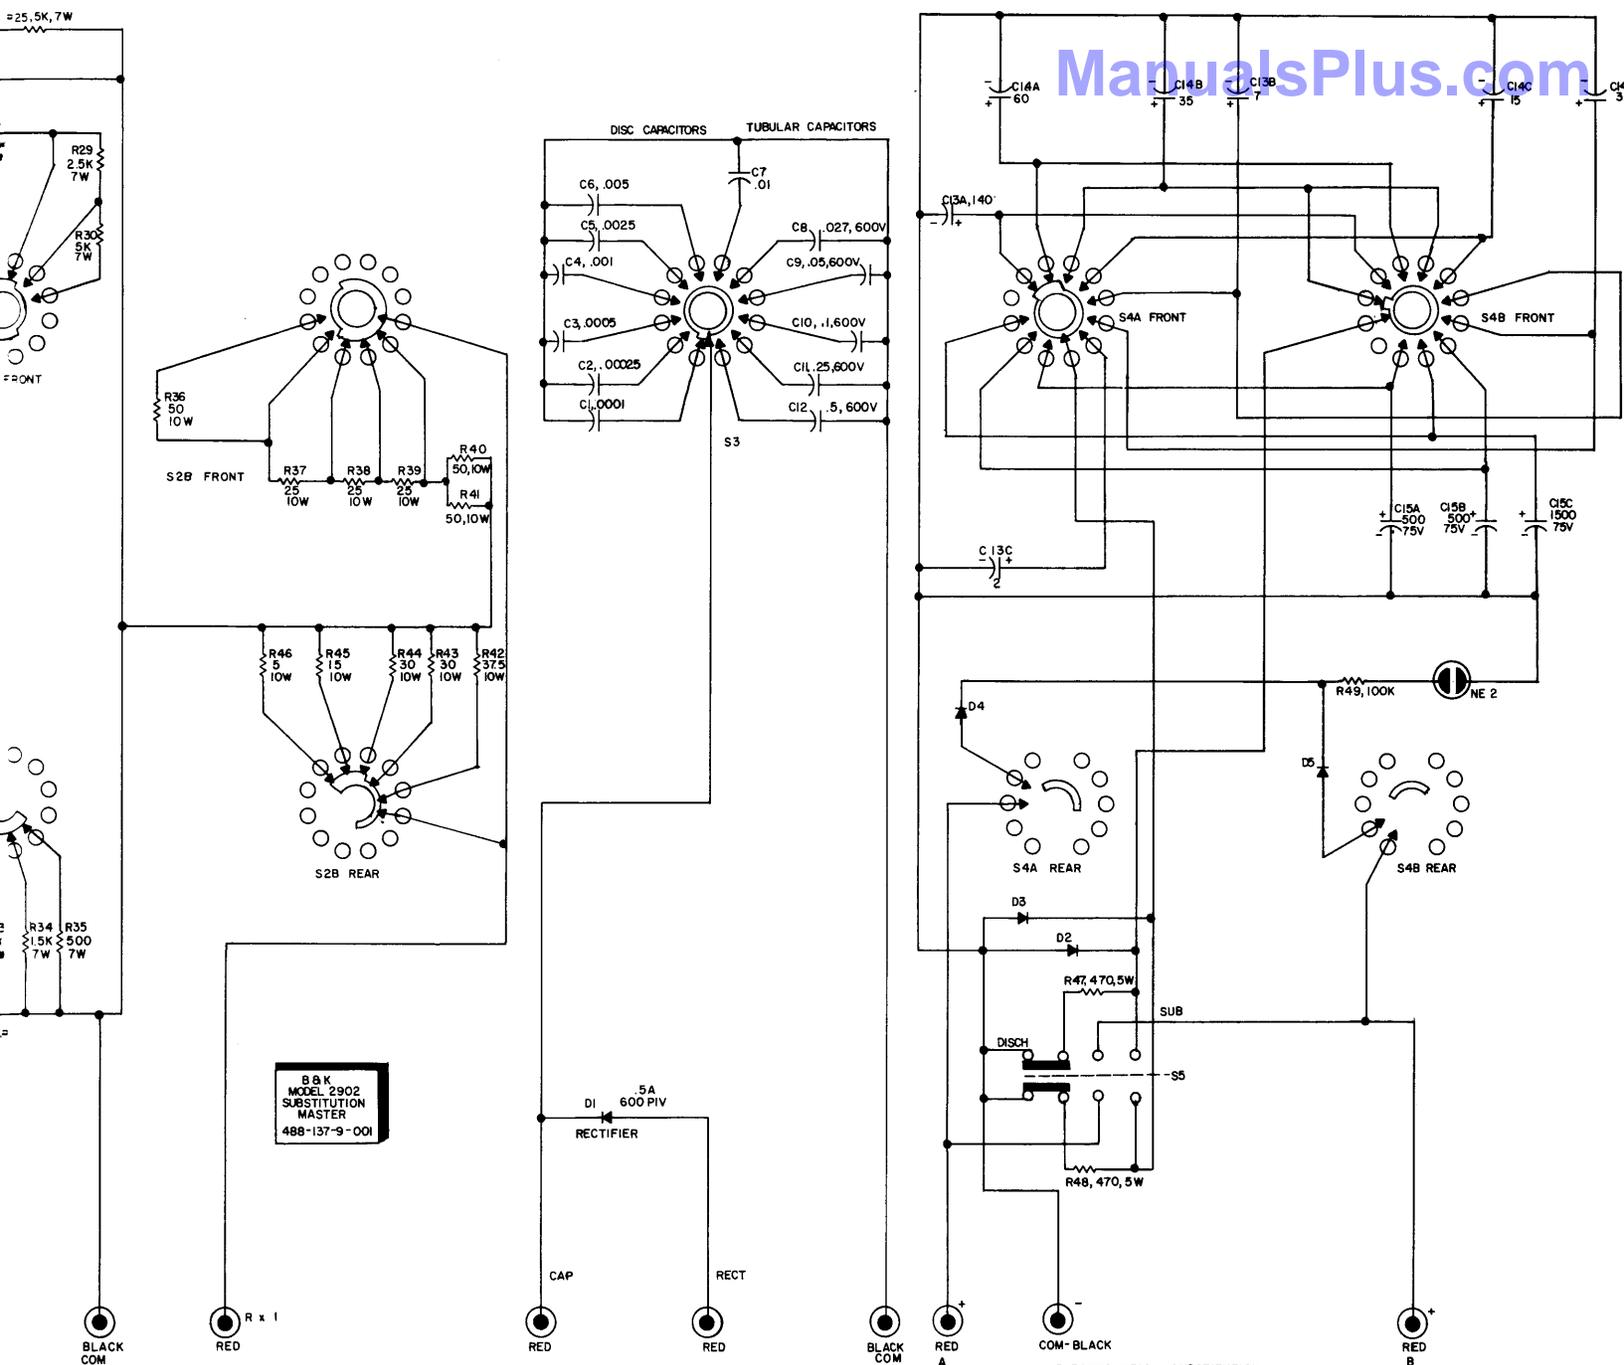

**S & K
MODEL 2902
SUBSTITUTION
MASTER
488-137-9-001**

- NOTES:
1. TOLERANCE ON ALL RESISTORS AND CAPACITORS (EXCEPT ELECTROLYTICS) IS $\pm 10\%$.
 2. TOLERANCE ON ELECTROLYTICS IS 20% - 20%.
 3. VOLTAGE RATING FOR ALL CAPACITORS (EXCEPT ELECTROLYTICS) IS 500V, UNLESS OTHERWISE SPECIFIED.
 4. VOLTAGE RATING FOR ALL ELECTROLYTIC CAPACITORS IS 450V, UNLESS OTHERWISE SPECIFIED.
 5. ALL ROTARY SWITCHES SHOWN IN FULL COUNTERCLOCKWISE POSITION.
 6. THIS SCHEMATIC SUBJECT TO CHANGE WITHOUT NOTICE.
 7. TITLES IN RECTANGLES DENOTE FRONT PANEL NOMENCLATURE.
 8. ALL CAPACITOR VALUES ARE IN MICROFARADS.

ELECTROLYTIC SUBSTITUTION

LAST NUMBER USED	NOT USED
R49	
C15C	
D5	
S5	
NE2	