


# CRT ADAPTER



**BK PRECISION**

## MODEL CR-22

ASSEMBLY WITH WIRES—527-085-9-001

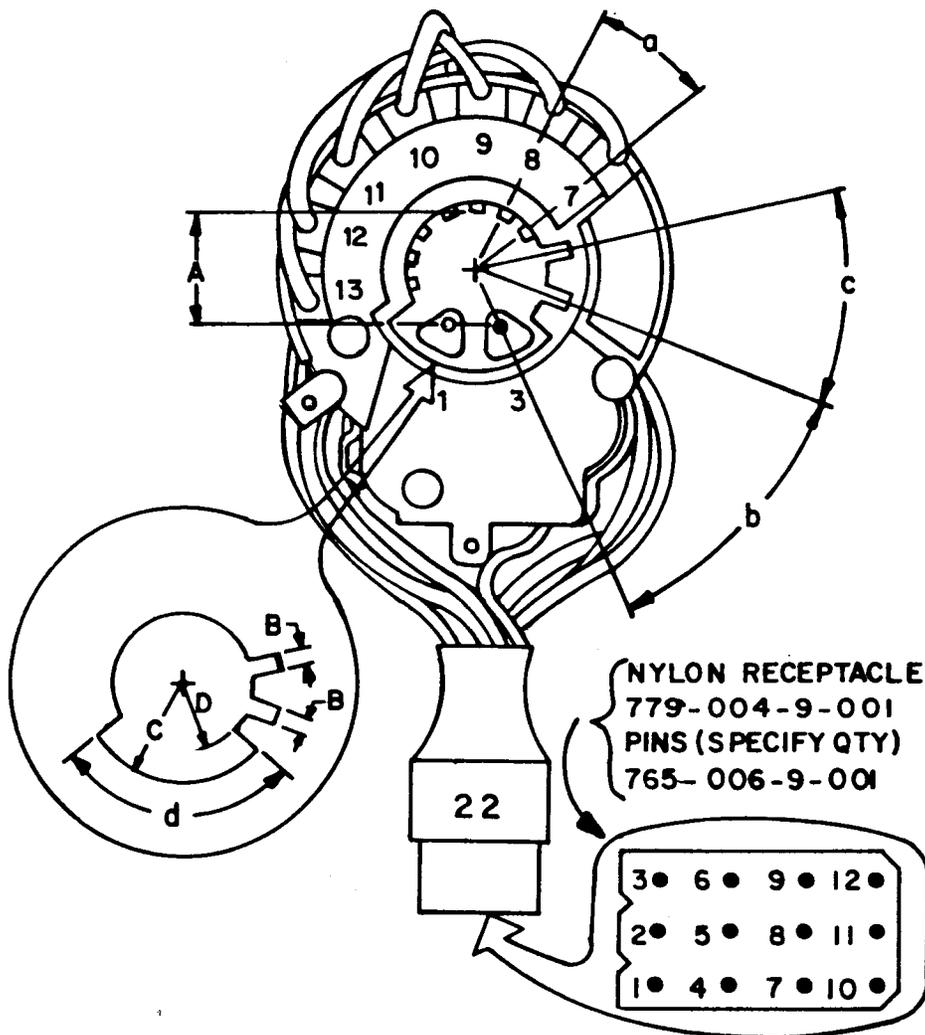

**NOTE: PINS 1 AND 3 ARE CONNECTED TOGETHER INTERNALLY TO A COMMON WHITE LEAD.**

WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEPTACLE
1, 3	WHT	12
2	—	—
3	—	—
4	—	—
5	—	—
6	—	—
7	BLK	1
8	BRN	2
9	RED	3
10	YEL/GRN	7
11	WHT/RED	10
12	YEL/RED	6
13	YEL/BLU	8

**FITS CRT DIMENSIONS:**

- A = pin circle diameter = 15.24 mm/0.600" nom.
- a = angular pin spacing = 25° 43'
- b = angular keyway spacing = 45°
- c = angular keyway spacing = 33°
- d = angular keyway opening = 102° 52' nom.
- B = keyway width = 2.39 mm/0.094" nom.
- C = outer keyway radius = 12.7 mm/0.500" nom.
- D = inner keyway radius = 10.62 mm/0.400" nom.



**BK PRECISION**

Maxtec International Corporation  
6470 West Cortland Street  
Chicago, Illinois 60635  
Telephone: (312) 889-1448

Used with B &amp; K-Precision Models: 467, 470

TUBE TYPE	HEATER VOLTAGE	TUBE TYPE	HEATER VOLTAGE	TUBE TYPE	HEATER VOLTAGE
19JVNP22	6.3	25VFYP22	6.3	25VHMP22	6.3
19VHTP22	6.3	25VGKP22	6.3	25VHNP22	6.3
19VLRP22	6.3	25VGLP22	6.3	25VHQP22	6.3
25VEMP22	6.3	25VGQP22	6.3	A63AA Y00X	6.3
25VEQP22	6.3	25VGSP22	6.3	A63AA Y01X	6.3
25VESP22	6.3	25VHAP22	6.3	A63AA Y02X	6.3
25VFMP22	6.3	25VHEP22	6.3	A63AA Y11X	6.3
25VFTP22	6.3	25VHGP22	6.3	A63AA Y12X	6.3
25VFXP22	6.3	25VHJP22	6.3	A63AA Y71X	6.3

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the B & K-Precision chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRT's that have come out since the last mailing.

If you wish to take advantage of this service, contact:

**B & K-PRECISION**, Factory Service Department  
 Maxtec International Corporation  
 6470 West Cortland Street  
 Chicago, Illinois 60635  
 Telephone #: (312) 889-1448

For information on ordering a subscription.



**BK PRECISION**

6470 West Cortland Street  
 Chicago, Illinois 60635

