


CRT ADAPTER



CR-33

SOCKET WITHOUT WIRES — 749-108-9-001

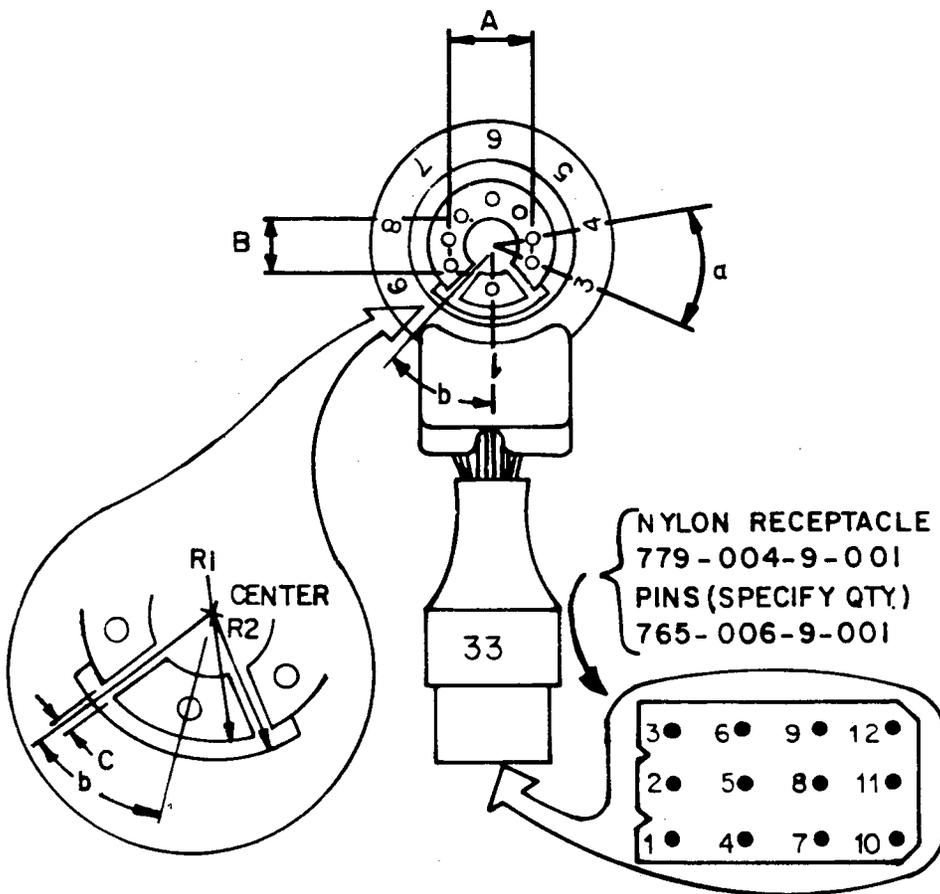

WIRING SCHEME

| CRT SOCKET PIN | WIRE COLOR | NYLON RECEPTACLE |
|----------------|------------|------------------|
| 1 | WHT | 12 |
| 2 | keyway | — |
| 3 | GRN | 8 |
| 4 | BLK | 1 |
| 5 | BRN | 2 |
| 6 | RED | 3 |
| 7 | ORG | 6 |
| 8 | BLU | 9 |
| 9 | YEL | 7 |
| 10 | keyway | — |

FITS CRT DIMENSIONS:

- A = pin circle diameter = 10.36 mm/0.408" nom.
- a = angular pin spacing = 36°
- b = angular keyway spacing = 38°
- B = post diameter = 6.5 mm/0.256" max.
- C = keyway width = 1.0 mm/0.040" max.
- R1 = inner radius keyway = 8.66 mm/0.341" nom.
- R2 = outer radius keyway = 9.76 mm/0.384" nom.

BK PRECISION DYNASCAN CORPORATION
 FACTORY SERVICE OPERATIONS
 4050 N. Ravenswood Ave.
 Chicago, Illinois 60613
 (312) 327-7270
 Telex # 25-3475

Used with B & K-Precision Models: 467, 470

| TUBE TYPE | HEATER VOLTAGE |
|--------------|-------------------|
| 150AYB22 | 3.3 |
| 150AZB22 | 3.3 |
| 250AMB22 | 6.3 |
| 370HAB22 | 6.3 |
| 370HZB22 | 6.3 |
| A13JCU00X | 3.3 |

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the B & K-Precision chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRT's that have come out since the last mailing.

If you wish to take advantage of this service, contact:

B & K-PRECISION, DYNASCAN CORPORATION
FACTORY SERVICE OPERATIONS
4050 North Ravenswood Avenue
Chicago, Illinois 60613
Telephone #: (312) 327-7270
Telex #: 25-3475

For information on ordering a subscription.

B&K PRECISION **DYNASCAN**
CORPORATION

6460 West Cortland Street
Chicago, Illinois 60635

**Photo NOT
Available**