




CRT ADAPTER

MODEL CR-35

ASSEMBLY WITH WIRES — 527-045-9-001

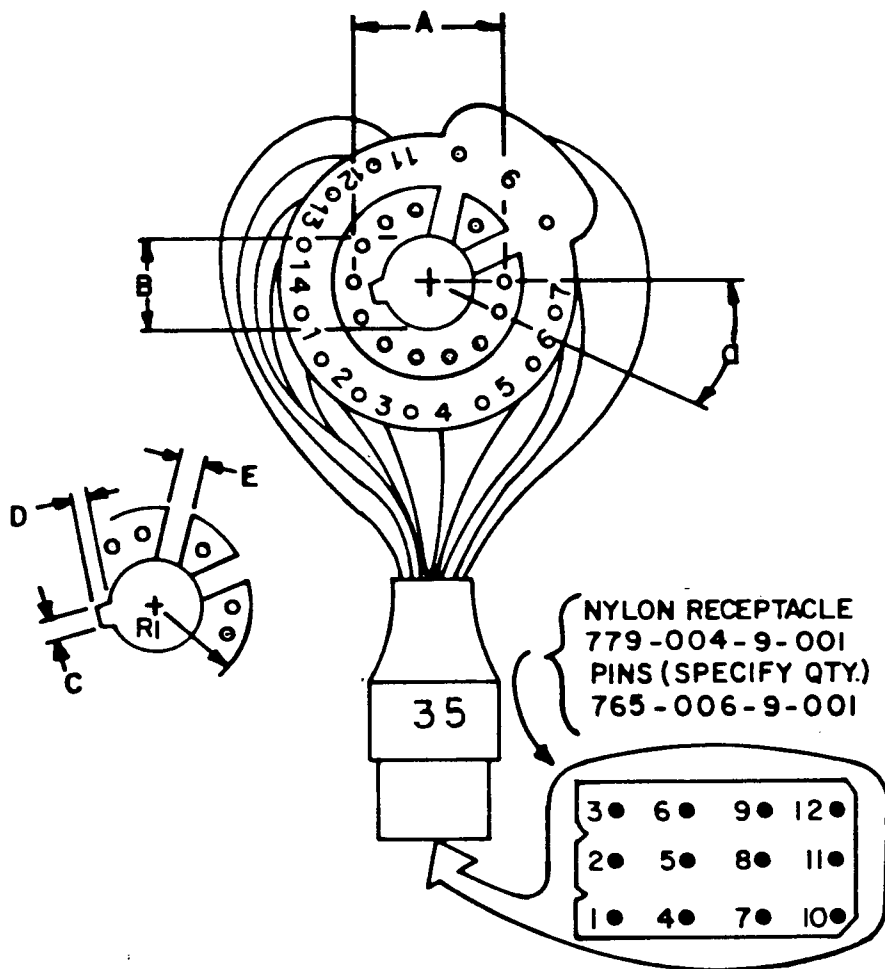

WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEPTACLE
1	BLK	1
2	YEL/RED	N.C.
3	RED	N.C.
4	WHT/RED	N.C.
5	WHT/GRN	3
6	YEL/GRN	N.C.
7	GRN	N.C.
8	keyway	—
9	WHT	12
10	keyway	—
11	YEL/BLU	9
12	BLU	N.C.
13	WHT/BLU	6
14	PRN	2

FITS CRT DIMENSIONS:

- A = pin circle diameter = 20.32 mm/0.800" nom.
- a = angular pin spacing = 25-5/7°
- B = post diameter = 11.5 mm/0.455" max.
- C = keyway width = 3.4 mm/0.135" max.
- D = keyway depth = 1.77 mm/0.070" max.
- E = keyway width = 1.83 mm/0.072" max.
- R1 = outer keyway radius = 26.24 mm/1.033" min.



B & K-Precision, Factory Service Department
 Maxtec International Corporation
 6470 West Cortland Street
 Chicago, Illinois 60635
 Telephone: (312) 889-1448

Used with **B & K-Precision** Models: 467, 470 480, 490

TUBE TYPE	HEATER VOLTAGE	TUBE TYPE	HEATER VOLTAGE	TUBE TYPE	HEATER VOLTAGE
C5M102P22B	6.3	EP96X18	6.3	M38-390R	6.3
C5M102P22G	6.3	EP96X19	6.3	M38-390RP	6.3
C5M102P22R	6.3	EP96X20	6.3	17M152-M	6.3
CE528	6.3	EP96X21	6.3	SC5819B	6.3
CE713	6.3	EP96X27	6.3	ST6143	6.3
CE781	6.3	EP96X28	6.3	ST6144	6.3
EP96X16	6.3	EP96X29	6.3	ST6149-B	6.3
EP96X17	6.3	M38-370R	6.3	ST6191	6.3
		M38-370RP	6.3		

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the **B & K-Precision** chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRT's that have come out since the last mailing.

If you wish to take advantage of this service, contact:

B & K-Precision, Factory Service Operations
 Maxtec International Corporation
 6470 West Cortland Street
 Chicago, Illinois 60635
 Telephone #: (312) 889-1448

For information on ordering a subscription.



BK PRECISION[®]

MAXTEC INTERNATIONAL CORP.

6470 W. Cortland St. • Chicago, IL 60635

