


CRT ADAPTER

BK PRECISION

CR-39

ASSEMBLY WITHOUT WIRES — 749-105-9-001
COVER, CRT SOCKET — 380-476-9-001

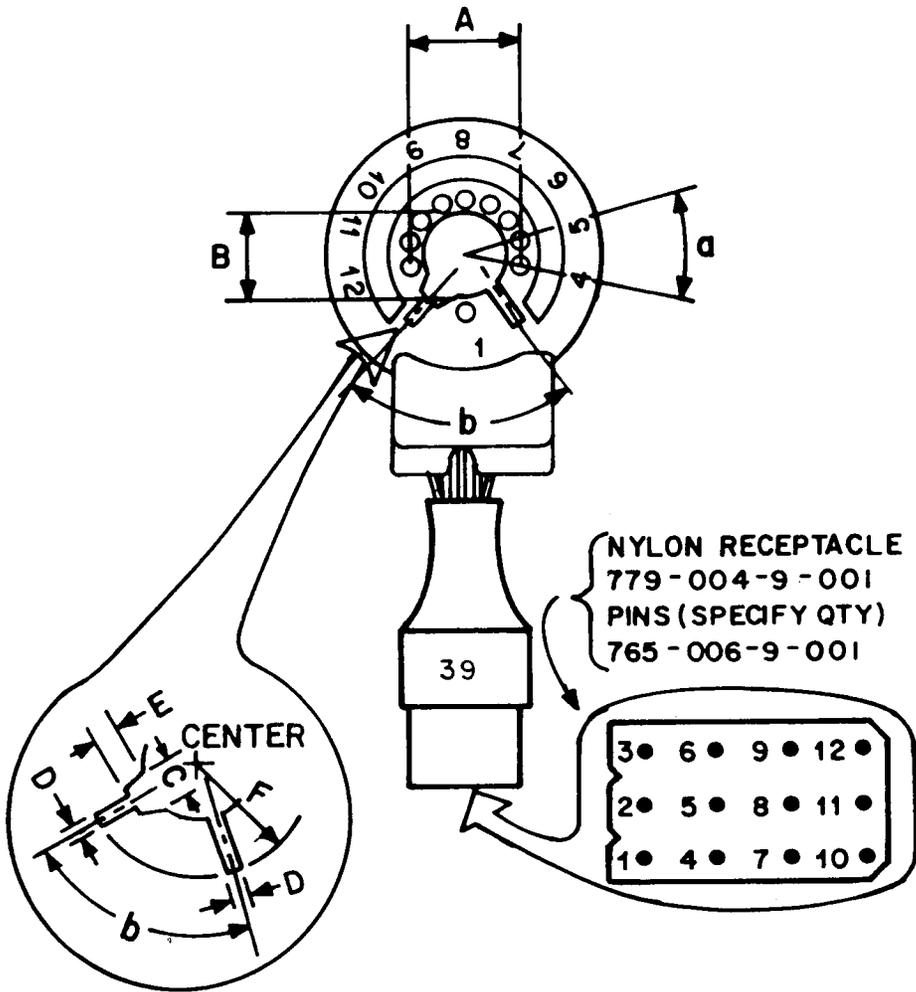

WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEPTACLE
1	WHT	12
2	keyway	—
3	keyway	—
4	ORG	3
5	RED	4
6	BLK	1
7	BRN	2
8	YEL	6
9	GRN	5
10	BLU	9
11	N.C.	N.C.
12	VIOLET	10
13	keyway	—
14	keyway	—

FITS CRT DIMENSIONS:

- A = pin circle diameter = 15.24 mm/0.600" nom.
- a = angular pin spacing = 25-5/7°
- B = post diameter = 11.4 mm/0.449" max.
- b = angular keyway spacing = 77.143°
- C = keyway width = 3.5 mm/0.138" max.
- D = keyway width = 1.8 mm/0.071" max.
- E = keyway depth = 1.70 mm/0.067" max.
- F = outer keyway radius = 11.6 mm/0.4565" max.

BK PRECISION DYNASCAN CORPORATION

FACTORY SERVICE OPERATIONS
4050 N. Ravenswood Ave.
Chicago, Illinois 60613
(312) 327-7270
Telex # 25-3475

Used with B & K-Precision Models: 467, 470

TUBE TYPE	HEATER VOLTAGE
180ADB22-B	6.3
180ADB22-GA	6.3
180ADB22-R	6.3
180WB22-B	6.3
180WB22-G	6.3
180WB22-R	6.3
EWX8	6.3
EWX9	6.3
EWX10	6.3

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the B & K-Precision chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRT's that have come out since the last mailing.

If you wish to take advantage of this service, contact:

B & K-PRECISION, DYNASCAN CORPORATION
FACTORY SERVICE OPERATIONS
 4050 North Ravenswood Avenue
 Chicago, Illinois 60613
 Telephone #: (312) 327-7270
 Telex #: 25-3475

For information on ordering a subscription.

BK PRECISION **DYNASCAN**
CORPORATION

6460 West Cortland Street
 Chicago, Illinois 60635

**Photo NOT
Available**