

THREE YEAR LIMITED WARRANTY

R.L. DRAKE COMPANY warrants to the original purchaser this product shall be free from defects in material or workmanship for three (3) years from the date of original purchase.

During the warranty period the R.L. DRAKE COMPANY or an authorized Drake service facility will provide, free of charge, both parts and labor necessary to correct defects in material and workmanship. At its option, R.L. DRAKE COMPANY may replace a defective unit.

To obtain such warranty service, the original purchaser must:

- (1) Retain invoice or original proof of purchase to establish the start of the warranty period.
- (2) Notify the R.L. DRAKE COMPANY or the nearest authorized service facility, as soon as possible after discovery of a possible defect, of:
 - (a) the model and serial number,
 - (b) the identity of the seller and the approximate date of purchase; and
 - (c) A detailed description of the problem, including details on the electrical connection to associated equipment and the list of such equipment.
- (3) Deliver the product to the R.L. DRAKE COMPANY or the nearest authorized service facility, or ship the same in its original container or equivalent, fully insured and shipping charges prepaid.

Correct maintenance, repair, and use are necessary to obtain proper performance from this product. Therefore carefully read the Instruction Manual. This warranty does not apply to any defect that R.L. DRAKE COMPANY determines is due to:

- (1) Improper maintenance or repair, including the installation of parts or accessories that do not conform to the quality and specifications of the original parts.
- (2) Misuse, abuse, neglect or improper installation.
- (3) Accidental or intentional damage.

All implied warranties, if any, including warranties of merchantability and fitness for a particular purpose, terminate three (3) years from the date of the original purchase.

The foregoing constitutes R.L. DRAKE COMPANY'S entire obligation with respect to this product, and the original purchaser shall have no other remedy and no claim for incidental or consequential damages, losses or expenses. Some states do not allow limitations on how long an implied warranty lasts or do not allow the exclusions or limitation of incidental or consequential damages, so the above limitation and exclusion may not apply to you.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state. This warranty shall be construed under the laws of Ohio.

SPECIFICATIONS

RF

Input Frequency: 54 - 806 MHz,
Off air channels
2 - 69,
CATV channels
2 - 125.

Input Level: -10 to +35 dBmV.

Noise Figure: VHF: 8 dB.
UHF: 10 dB.

Image Rejection: VHF: 65 dB.
UHF: 50 dB.

Input Impedance: 75 Ohms.

VIDEO

Output Level: 1.0 Vp-p, NTSC
standard negative
sync.

Output Impedance: 75 Ohms.

Differential Gain: Less than 5%.

Differential Phase: Less than 5 degrees.

L/C Delay: ±50 nSec maximum.

AUDIO

Output Level: 300 mV rms nominal,
adjustable with front
panel control ±10 dB.

Output Impedance: Less than 500 Ohms,
unbalanced.


GENERAL

DC Power Input: +12 VDC @ 120 mA,
+5 VDC @ 100 mA.

Operating
Temperature: 0° C to +50° C.

Dimensions: 1" W x 3.5" H x 7.5" D.

Weight: 12 oz.

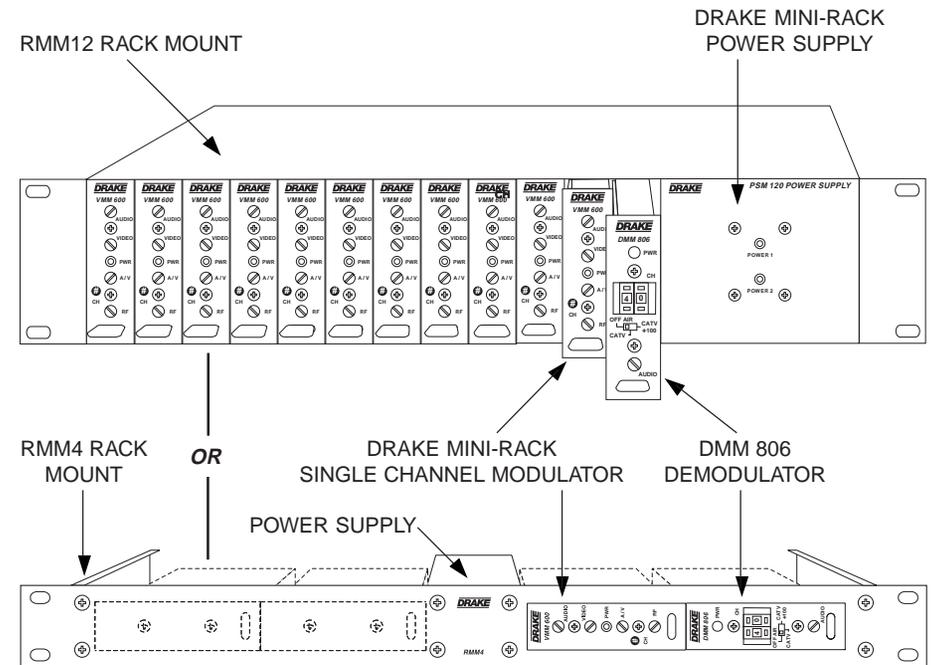

The R.L. Drake DMM 806 is a professional quality agile television channel demodulator that provides an audio and video output from any VHF, UHF, or CATV channel (54 - 806 MHz). The modular design of the DMM 806 permits convenient pairing with a Drake Mini-rack Video Modulator to perform off-air or CATV channel processing.

The desired off-air VHF or UHF television channel from 2 through 69 or CATV channel from 2 through 125 is selected by a front panel pushwheel switch and associated slide switch. The DMM 806 provides a standard negative sync video output at a nominal level of 1 Vp-p, and an audio output signal that is level adjustable from approximately 0.5 to 1.5 Vp-p with a front panel control.

As previously described, channel selection switches and audio output level control are located on the front panel. The RF Input is through an "F" type connector located on the rear panel. The rear panel Video Output is also an "F" type connector. The Audio Output is through a rear panel RCA type phono connector. The unit is powered by a compatible Drake Mini-rack power supply module.

DRAKE® is a registered trademark of the R.L. Drake Company

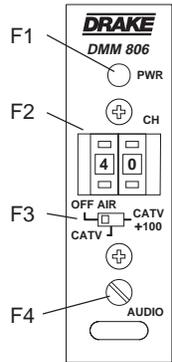


Figure 1

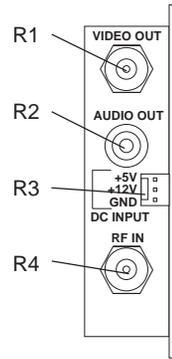


Figure 2

F1 - POWER Indicator

Lights when the unit is connected to the required source of DC power via the rear panel DC INPUT connector.

F2 - Channel Number Switch


Sets the received channel number for off-air TV channels 02 through 69 or for CATV channels 02 through 125. See also Item F3 which sets the type of channel (Off-Air or CATV) and sets the leading "1" for CATV channels 100 through 125.

F3 - Mode Switch

Sets the type of channel, Off-Air or CATV. The third position sets a leading "1" for CATV channels from 100 through 125. See also Item F2 for setting the channel number.

For example:
Setting for CATV channel "25"-

For example:
Setting for CATV channel "125"-

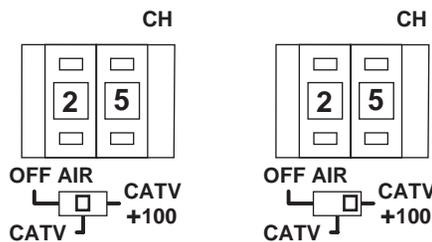

F4 - AUDIO Output Level Control

This screwdriver adjustment permits setting the audio output level over a range of approximately 0.5 to 1.5 Vp-p.

R1 - VIDEO OUTPUT Connector

This is the 75 Ohm baseband video output at a fixed, nominal 1.0 Vp-p level.

R2 - AUDIO OUTPUT Connector


This is the unbalanced, audio output which is adjustable with the front panel AUDIO control over a range of approximately ± 10 dB from the nominal output level of 300 mV rms. NOTE: An internal jumper defeats the audio de-emphasis for stereo capability, if required.

R3 - DC INPUT Connector

This 3-pin connector (Male) accepts the appropriate mating DC power cable. Observe proper orientation and wiring.

R4 - RF INPUT Connector

This is the 75 Ohm input to the demodulator circuits from an off-air television receiving antenna or from a CATV cable input.

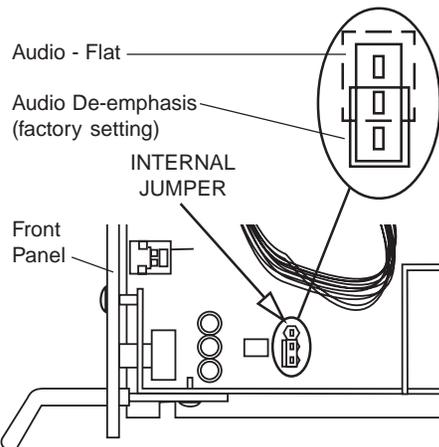

CONNECTIONS and CONTROLS

All connections to and from the DMM 806 are made through the rear panel. Figure 3 illustrates the use of the DMM 806 as an off-air channel processor. For this purpose, the feed from a television antenna is connected via a 75 Ohm coaxial cable to the RF IN connector of the DMM 806. The front panel switches are set for "OFF-AIR" and the received TV channel number is set for 02 through 69 as required. The VIDEO OUT and AUDIO OUT signals are connected to the VIDEO IN and AUDIO IN connectors respectively of an adjacently located Video Modulator, such as a Drake Mini-rack Video Modulator, operating on the desired cable TV

channel. Alternatively, cable TV channels can be processed by connecting the 75 Ohm coaxial cable of a CATV feed to the DMM 806 RF IN connector and setting the front panel switches for "CATV" or "CATV +100" and the received cable channel number 02 through 125 as required. Additional channels can be processed by adding combinations of DMM 806 units with Drake Mini-rack Video Modulator units.

RACK MOUNTING

Adequate ventilation is very important in multi-channel installations. Units should be spaced apart by at least one panel height wherever possible, and some air movement is advisable in enclosed rack cabinets. Excessive heat will shorten component life and system performance will be degraded without proper cooling.

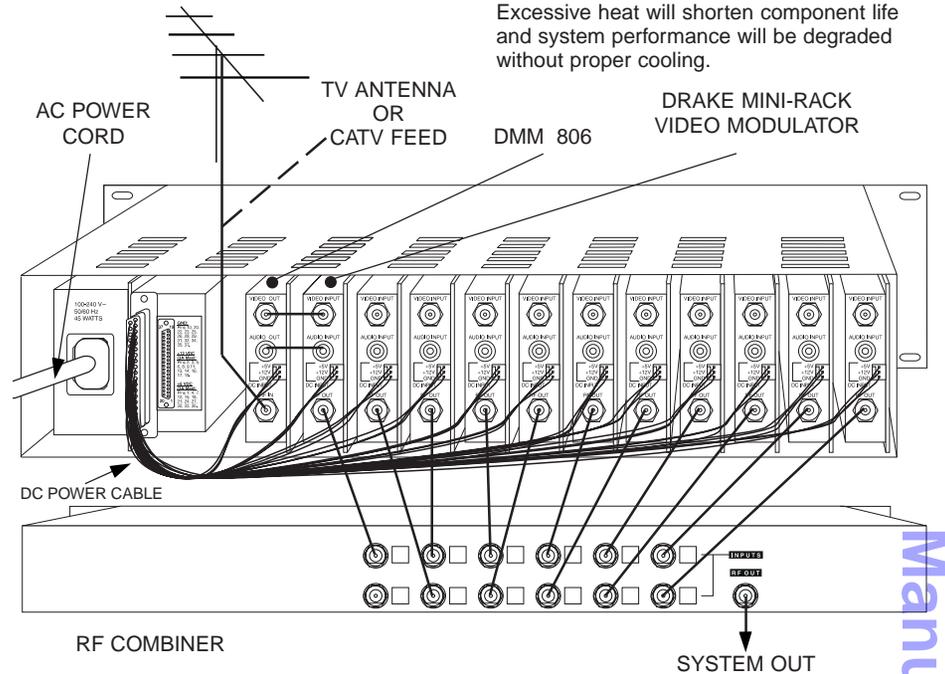


Figure 3

Illustration of Channel Processing using DMM 806 and a Drake Mini-rack Video Modulator.



R.L. DRAKE COMPANY
230 INDUSTRIAL DRIVE
FRANKLIN, OHIO 45005 U.S.A.
CUSTOMER SERVICE AND PARTS TELEPHONE:
+1 (937) 746-6990
TELEFAX:
+1 (937) 743-4576
WORLD WIDE WEB SITE: <http://www.rldrake.com>