
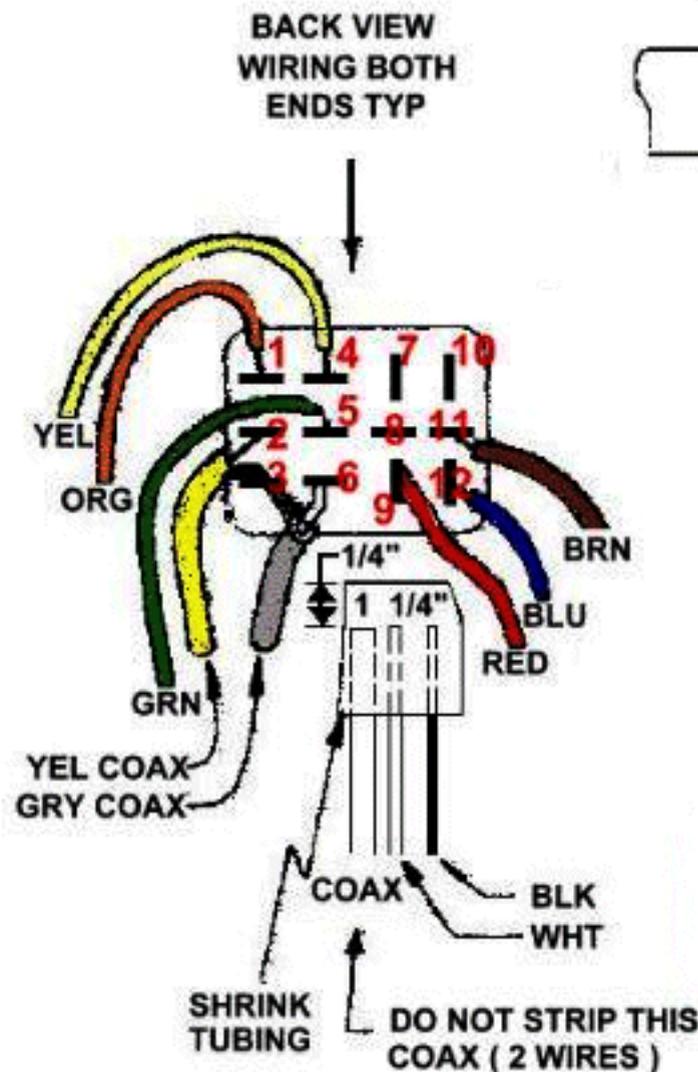


NOTES :

1. WIRE PIN TO PIN
eg : PIN 1 - PIN 1
eg : PIN 4 - PIN 4
DO NOT INTERCONNECT PINS 7, 8, 10
2. RETAIN EXTRA (1) COAX AND (2) #22 STRANDED WIRES (WHT, BLK) INSULATE WITH 1-1/4" LENGHT SHRINK TUBING (#349-4250) AS SHOWN IN PICTORIAL
3. INSULATE PINS 2, 5, 6, 9 WITH 3/8" LENGHT SHRINK TUBING (#349-4040) PRE-SOAK TUBING IN LACQUER THINNER

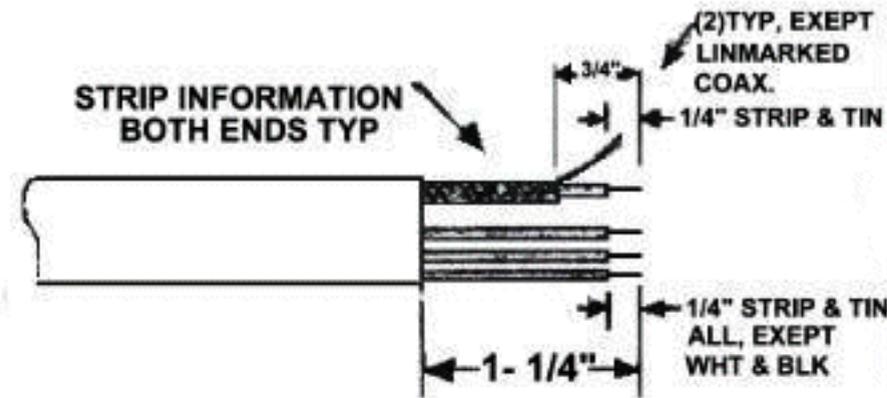

**TR7/R7
CABLE ASSY,
TRANSCEIVE**

DRAKE PAGE
By EA1DDO

DWG. NO. B-4842
DATE 4/25/79