


**SCHEMATIC OF THE  
HEATHKIT®  
STEREO AMPLIFIER  
MODEL AA-32**

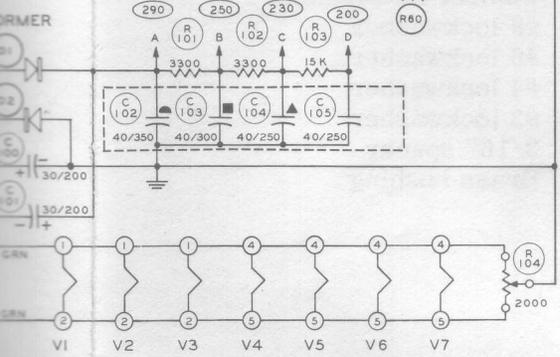

**NOTES:**  
 ALL RESISTORS ARE 1/2 WATT UNLESS MARKED OTHERWISE.  
 ALL RESISTOR VALUES ARE IN OHMS (K=1000, MEG=1,000,000).  
 ALL CAPACITOR VALUES ARE IN µF UNLESS MARKED OTHERWISE.  
 ○ INDICATES VOLTAGE READING.  
 ALL VOLTAGES ARE DC POSITIVE UNLESS MARKED OTHERWISE.  
 ALL VOLTAGES ARE MEASURED FROM POINT INDICATED TO CHASSIS GROUND,  
 EXCEPT AC VOLTAGES ON POWER TRANSFORMER WINDINGS.  
 VOLTAGE READINGS TAKEN WITH AN 11 MEGOHM INPUT VTVM AND MAY VARY ±10%.

ARROW (→) INDICATES CLOCKWISE ROTATION OF KNOB.  
 SELECTOR SWITCH VIEWED FROM THE FRONT, AT FULL COUNTERCLOCKWISE ROTATION.  
 R AND C NUMBERS FOR THE RESISTORS AND CAPACITORS IN THE LEFT CHANNEL ARE ODD NUMBERED.  
 R AND C NUMBERS FOR THE RESISTORS AND CAPACITORS IN THE RIGHT CHANNEL ARE EVEN NUMBERED.  
 R AND C NUMBERS FOR THE RESISTORS AND CAPACITORS IN THE POWER SUPPLY START WITH 100.