


Heathkit Resistance and Capacitance Bridge

MODEL C-3U



SPECIFICATIONS

| | |
|--|--|
| Capacity: 4 ranges:..... | .00001 μ F - .005 μ F .001 μ F - .5 μ F .1 μ F - 50 μ F 20 μ F - 1000 μ F |
| DC Leakage Test Polarising Voltages: 5 ranges | 5 volts DC 25 volts DC 150 volts DC 250 volts DC 450 volts DC |
| Power Factor:..... | Direct reading of power factor of electrolytic condensers |
| Resistance Ranges: 2 ranges | 100 ohms to 50,000 ohms 10,000 ohms to 5 megohms |
| Power Requirements:..... | 200-250v AC; 40-60 cycles; 30 watts |
| Circuit:..... | AC powered bridge for both capacitive and resistive measurements. Maximum opening of electron beam indicator denotes bridge balance. Dual sensitivity for accurate adjustment |
| Cabinet size:..... | 9½" wide x 6½" high x 5" deep |
| Kit Shipping Weight:..... | 7 lbs. |

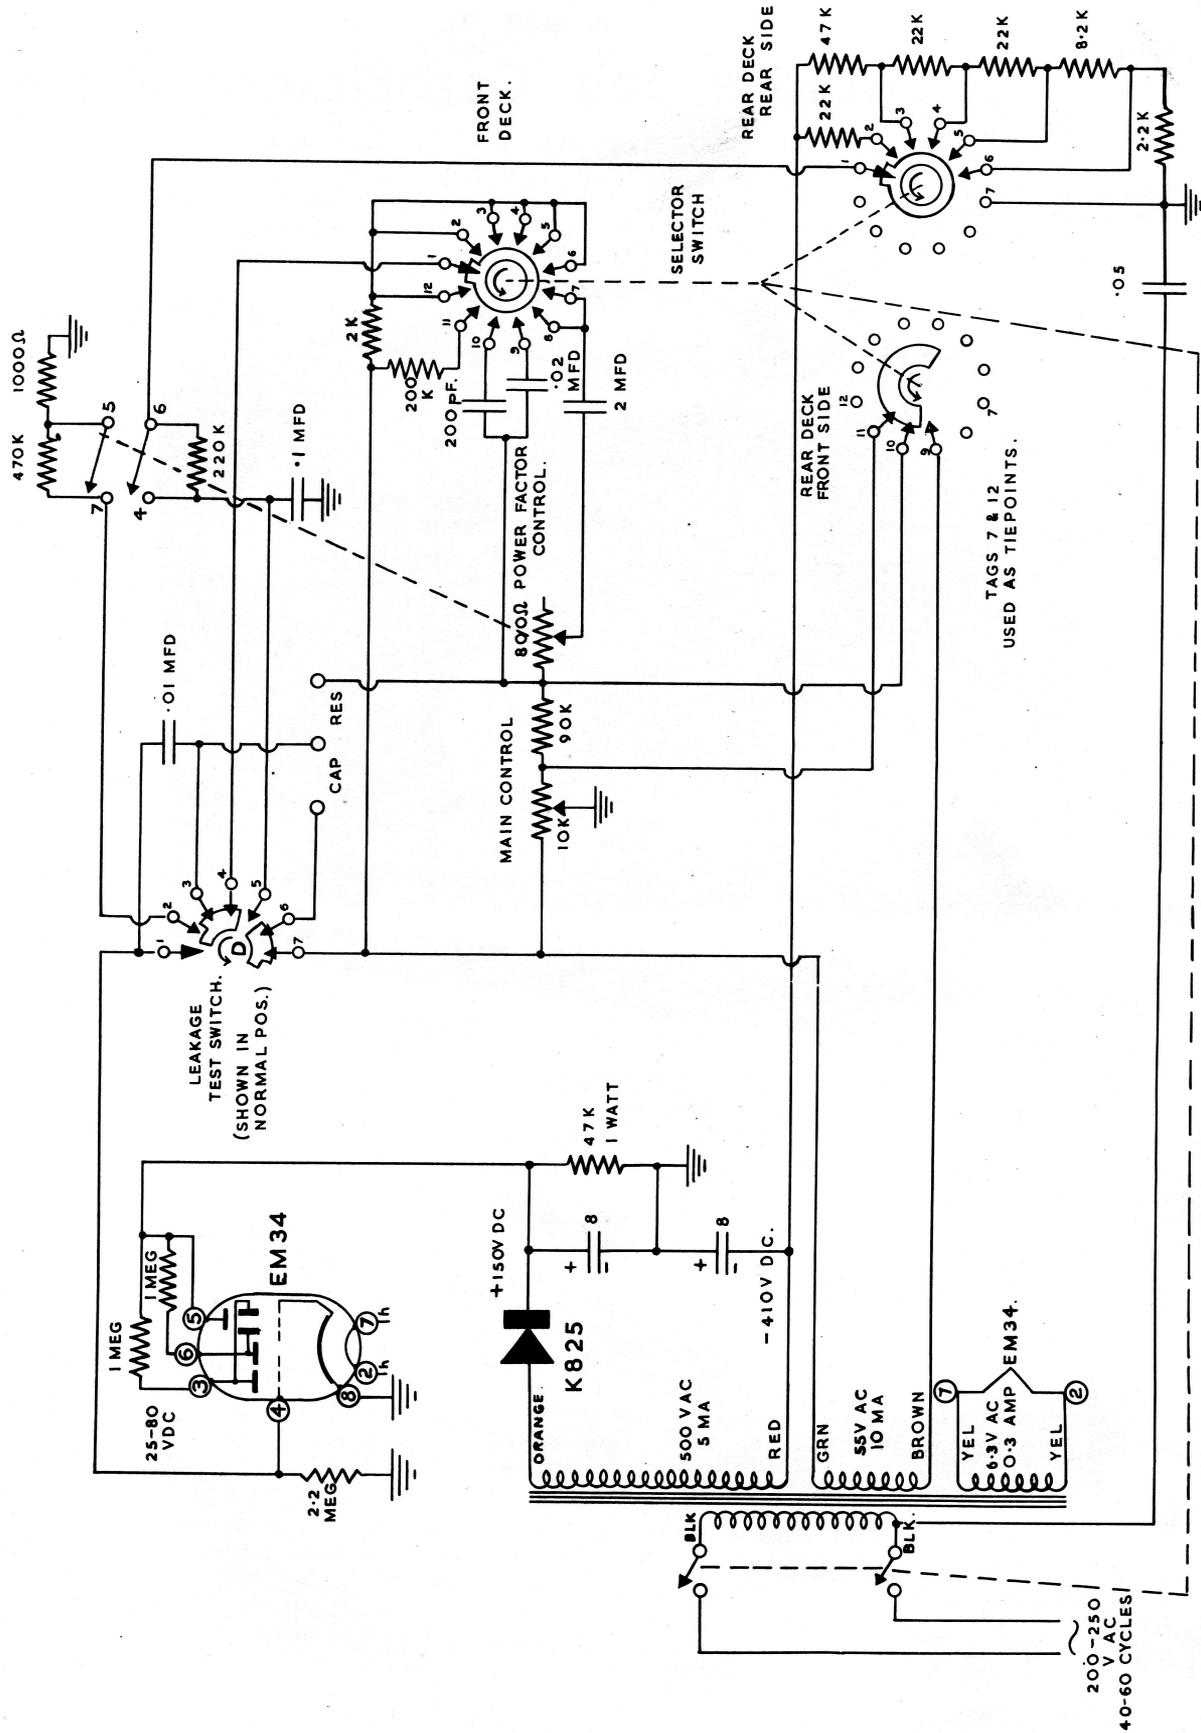

Heathkit Resistance and Capacitance Bridge

MODEL C-3U