


SCHEMATIC OF THE HEATHKIT® FLOOD ALARM MODEL GD-1701

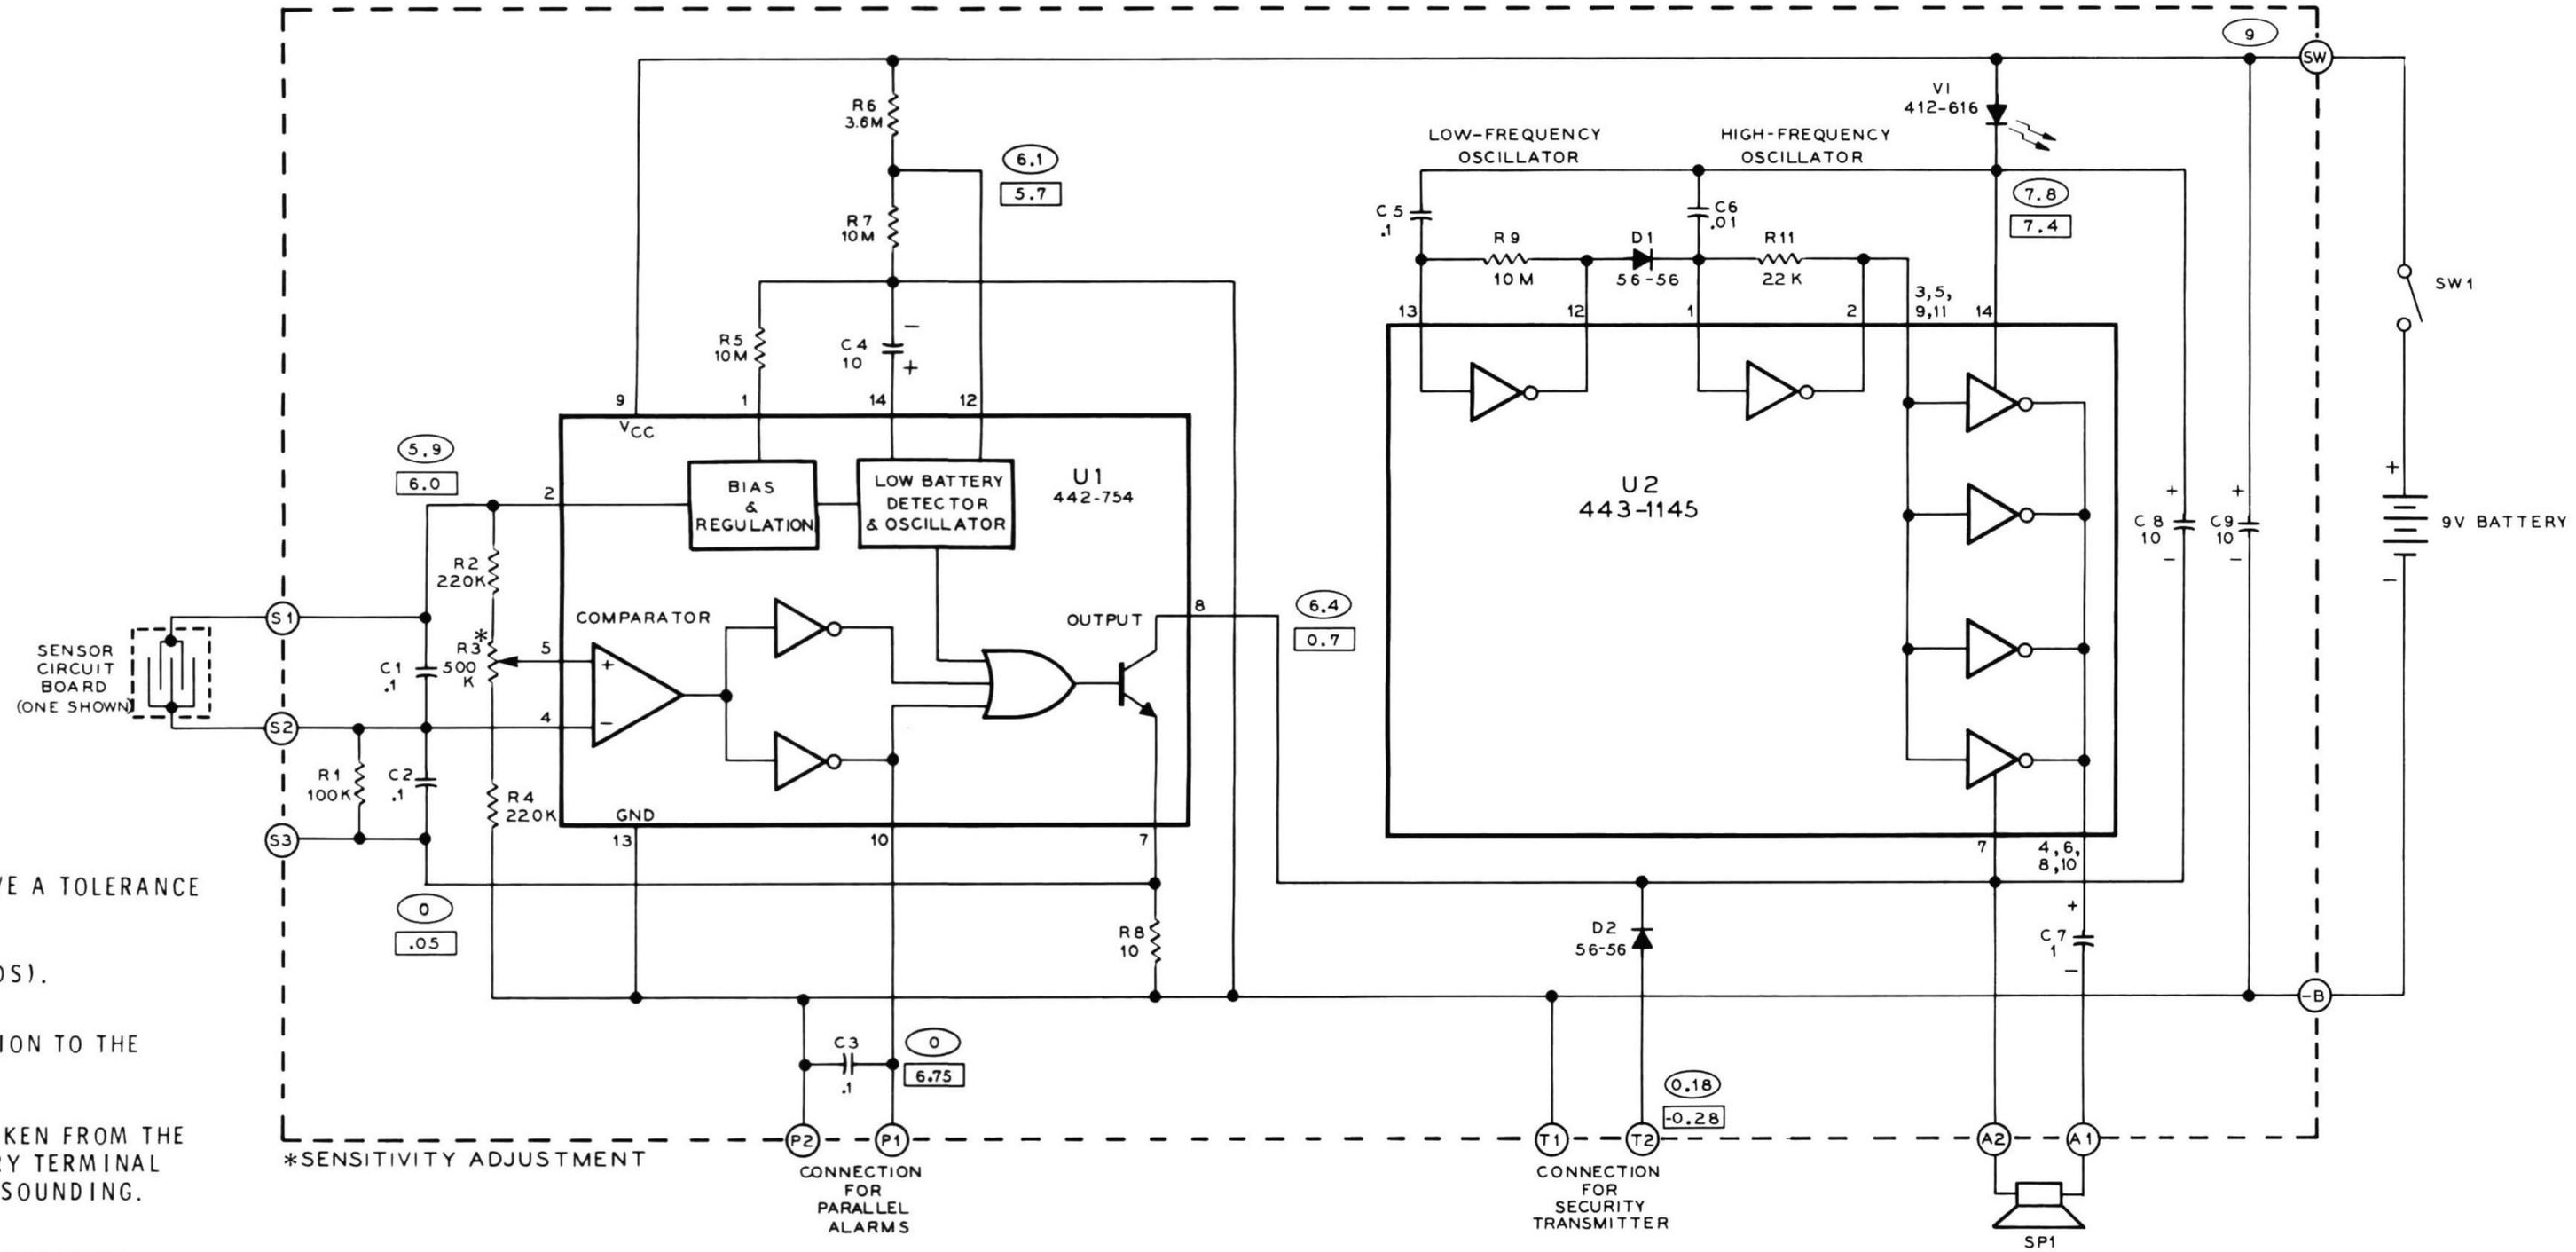

NOTES:

1. ALL RESISTORS ARE RATED AT 1/4-WATT AND HAVE A TOLERANCE OF 5% (K=1000 , M=1,000,000).
2. ALL CAPACITOR VALUES ARE IN μF (MICROFARADS).
3. ○ THIS SYMBOL INDICATES A WIRE CONNECTION TO THE CIRCUIT BOARD.
4. ○ THIS SYMBOL INDICATES A DC VOLTAGE TAKEN FROM THE POINT INDICATED TO THE NEGATIVE BATTERY TERMINAL WHEN THE ALARM IS TURNED ON, BUT NOT SOUNDING.
5. □ THIS SYMBOL INDICATES A DC VOLTAGE TAKEN FROM THE POINT INDICATED TO THE NEGATIVE BATTERY TERMINAL WHEN THE ALARM IS TURNED ON AND SOUNDING.