


NOTES:

1. RESISTORS ARE 1/2 WATT, 5% TOLERANCE, UNLESS OTHERWISE SPECIFIED.
2. RESISTOR VALUES ARE IN OHMS (K=1000, M=1,000,000).
3. CAPACITOR VALUES ARE IN MICROFARADS (M=1000,000).
4. ARROWS ON CONTROLS INDICATE CLOCKWISE ROTATION.
5. ○ THIS SYMBOL INDICATES A DC VOLTAGE TAKEN WITH AN 11-MEGOHM INPUT VOLTAGE FROM THE POINT INDICATED TO CHASSIS GROUND.
6. VOLTAGES TAKEN WITH TONE 1 BUTTON IN A CONTINUOUS TONE OUTPUT INTO THE TRANSMITTER.

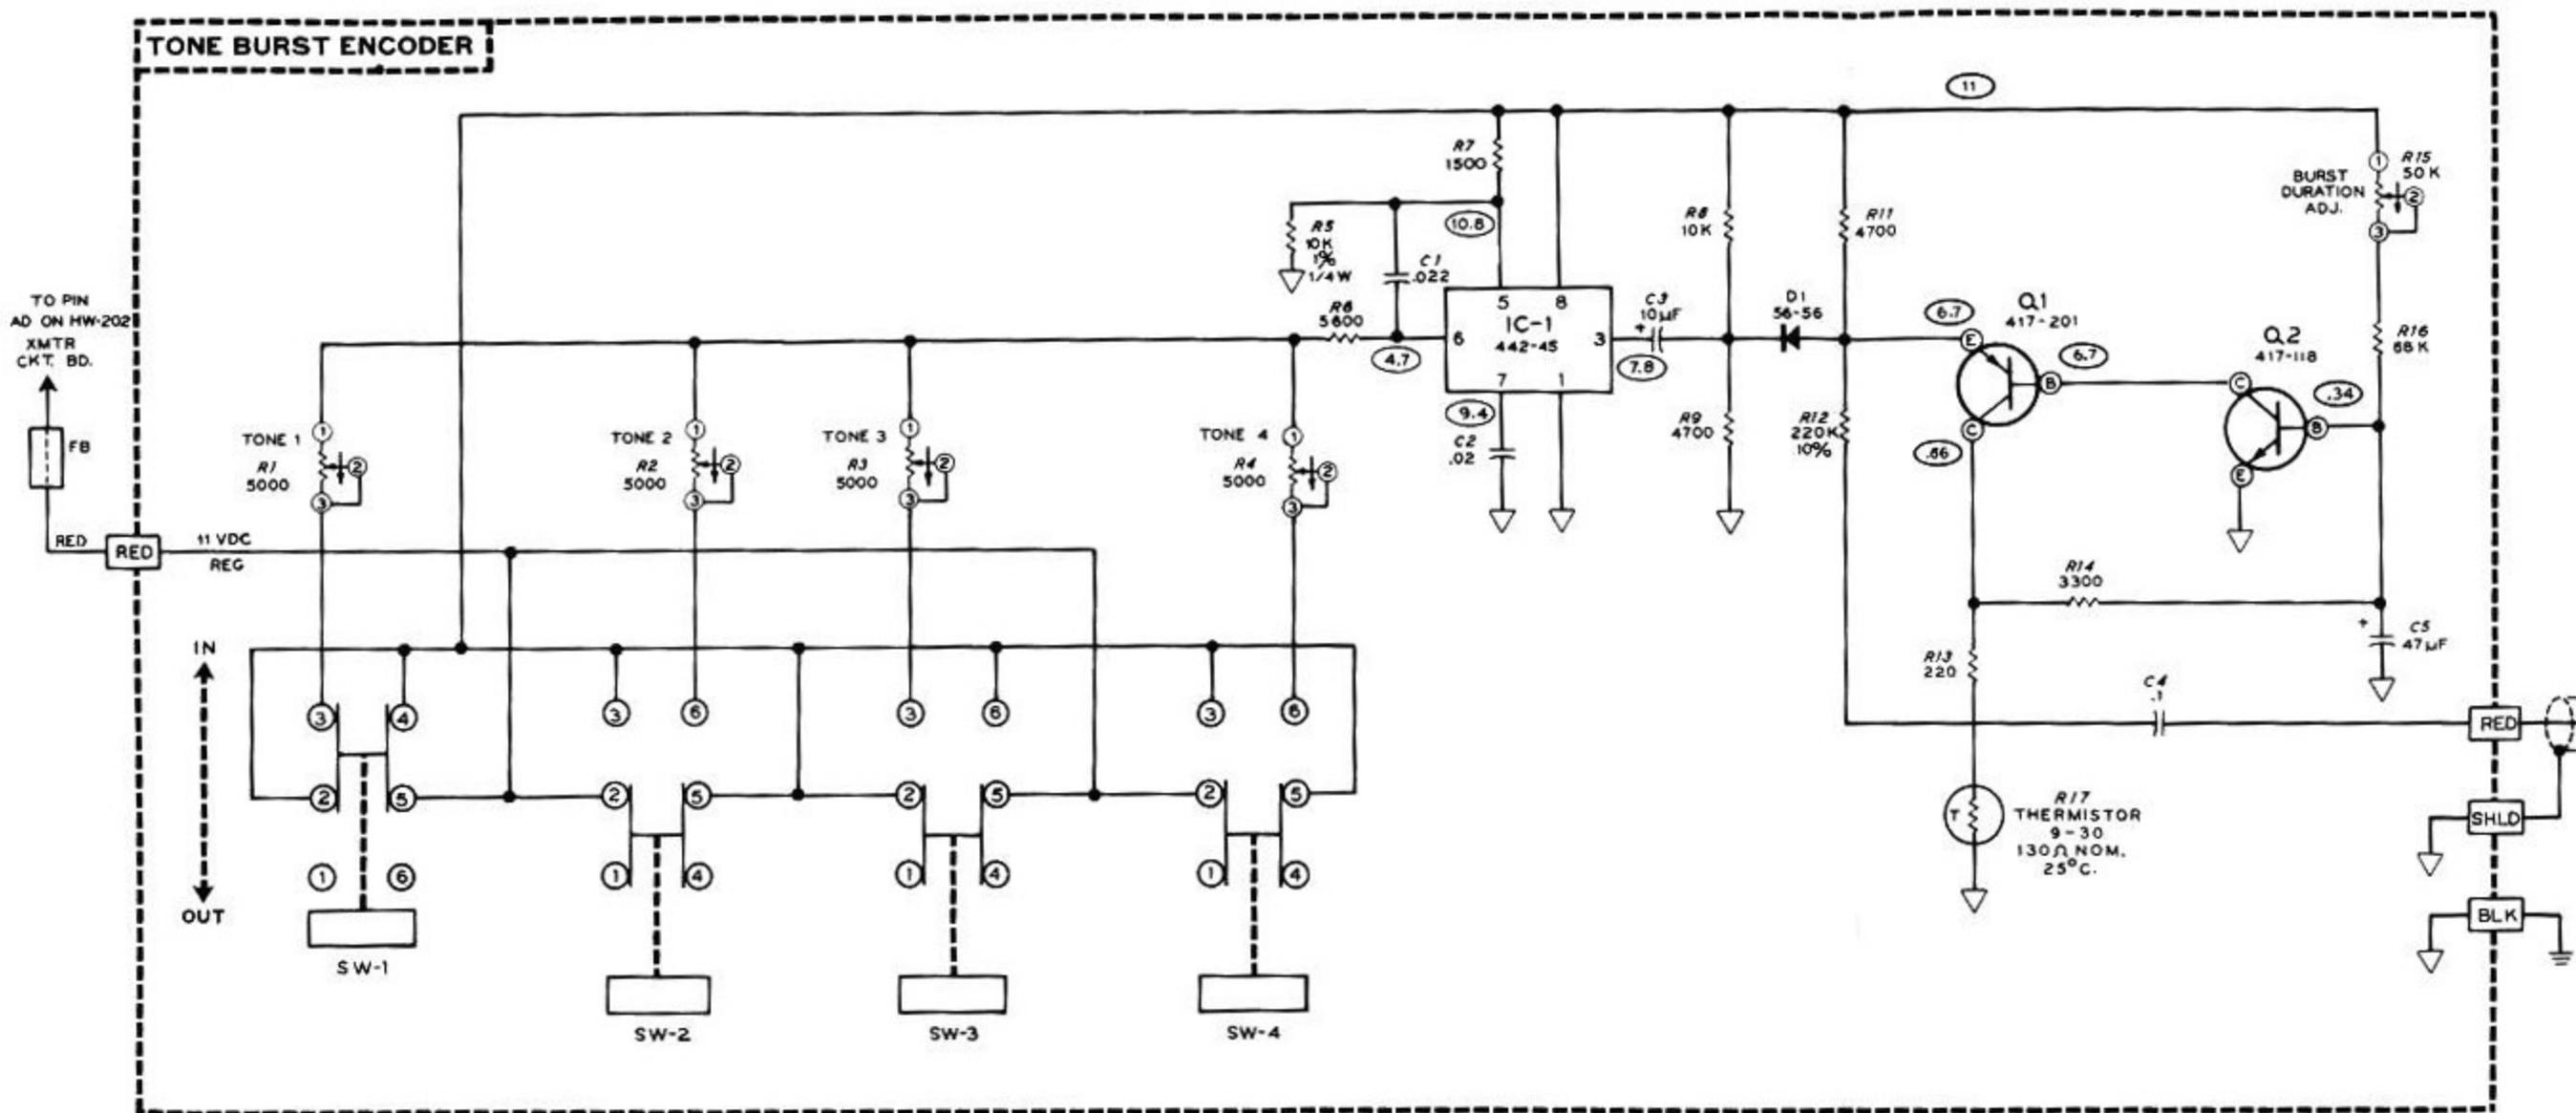

**SCHEMATIC OF THE
HEATHKIT®
TONE BURST ENCODER
MODEL HWA-202-2**