


CRT ADAPTER



CR-4

ASSEMBLY WITH WIRES — 527-045-9-001

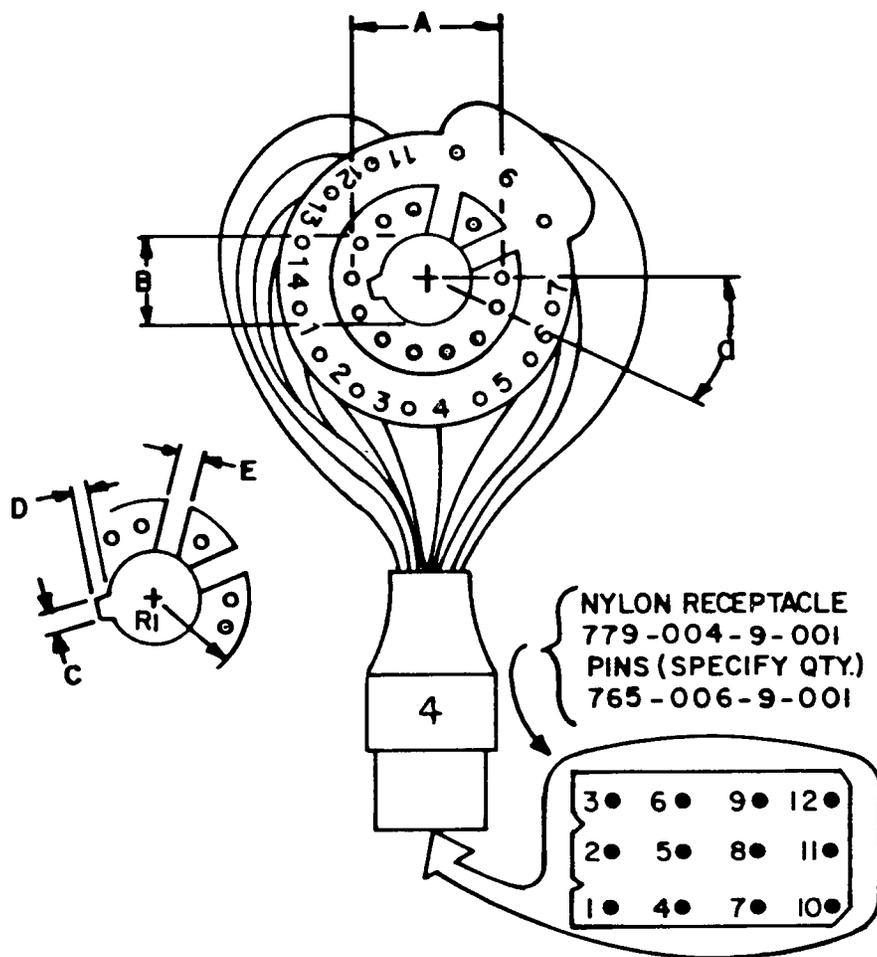

WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEPTACLE
1	BLK	1
2	YEL/RED	9
3	RED	3
4	WHT/RED	8
5	WHT/GRN	11
6	YEL/GRN	5
7	GRN	6
8	keyway	—
9	WHT	12
10	keyway	—
11	YEL/BLU	7
12	BLU	10
13	WHT/BLU	4
14	BRN	2

FITS CRT DIMENSIONS:

- A = pin circle diameter = 20.32 mm/0.800" nom.
- a = angular pin spacing = 25-5/7°
- B = post diameter = 11.5 mm/0.455" max.
- C = keyway width = 3.4 mm/0.135" max.
- D = keyway depth = 1.77 mm/0.070" max.
- E = keyway width = 1.83 mm/0.072" max.
- R1 = outer keyway radius = 26.24 mm/1.033" min.



FACTORY SERVICE OPERATIONS
 6460 West Cortland Street
 Chicago, Illinois 60635
 (312)889-8870
 Telex # 25-3475

Used with B & K-Precision Models: 467, 470

TUBE TYPE	HEATER VOLTAGE	TUBE TYPE	HEATER VOLTAGE
10VABP22#	6.3	16VBMP22	6.3
10VADP22#	6.3	16VBSP22	6.3
15MP22	6.3	16VEMP22#	6.3
15YP22	6.3	17EXP22	6.3
16VAWP22	6.3	17FJP22	6.3
16VBDP22	6.3	17JP22	6.3

Tubes marked with (#), red and green guns interchanged (test red gun with green control, and vice versa).

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the B & K-Precision chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRT's that have come out since the last mailing.

If you wish to take advantage of this service, contact:

B & K-PRECISION, DYNASCAN CORPORATION
 FACTORY SERVICE OPERATIONS
 6460 West Cortland Street
 Chicago, Illinois 60635
 Telephone #: (312) 889-8870
 Telex #: 25-3475

For information on ordering a subscription.

B&K PRECISION **DYNASCAN**
CORPORATION

6460 West Cortland Street
 Chicago, Illinois 60635

