


# CRT ADAPTER



# MODEL CR-6

SOCKET WITH WIRES - 527-049-9-001

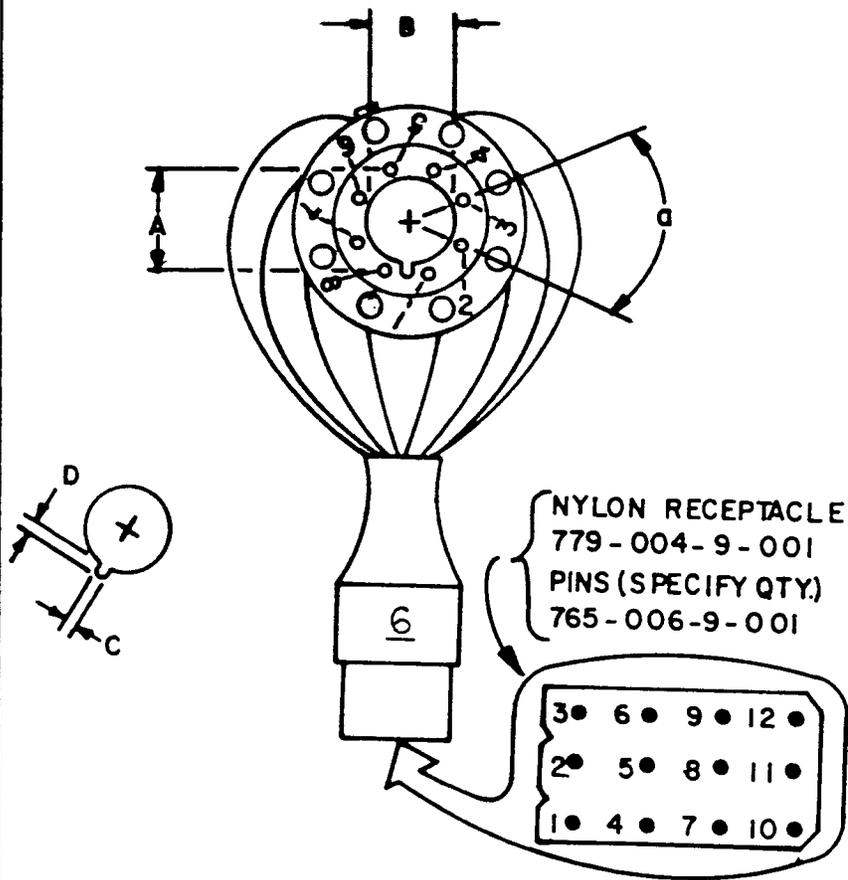

WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEPTACLE
1	BLK	1
2	WHT	3
3	YEL/BLU	10
4	YEL/GRN	12
5	WHT/RED	N.C.
6	YEL/RED	4
7	GRN	6
8	BRN	2

**FITS CRT DIMENSIONS:**

- A = pin circle diameter = 15.24 mm/0.600" nom.
- a = angular pin spacing = 45°
- B = post diameter = 11.15 mm/0.439" max.
- C = keyway width = 2.36 mm/0.093" max.
- D = keyway depth = 1.778 mm/0.070" max.



**BK PRECISION**

B & K-Precision, Factory Service Department  
 Maxtec International Corporation  
 6470 West Cortland Street  
 Chicago, Illinois 60635  
 Telephone: (312) 889-1448

Used with **B & K-Precision** Models 467, 470, 480, 490.

TUBE TYPE	HEATER VOLTAGE	TUBE TYPE	HEATER VOLTAGE	TUBE TYPE	HEATER VOLTAGE
8JP4	6.3	19ACP4*	6.3	A44-520W	6.3
9ABP4	6.3	19VFTP4	11.0	A51-10W	6.3
9ADP4*	6.3	20ABP4*	6.3	A59-25W	6.3
9TP4*	6.3	20ZP4*	6.3	A65-13W	6.3
11AP4	6.3	21CZP4	6.3	C12M21P4	12.0
11DP4*	6.3	21GTP4*	6.3	CE685	6.3
11TP4	6.3	22AFP4	6.3	E2112	6.3
12AYP4	6.3	22VARP4*	6.3	E2934	6.3
12AZP4	6.3	23DTP4	6.3	H8200P4	6.3
12CAP4*	6.3	23WP4	6.3	M17-10	11.5
13KP4*	6.3	24AXP4	6.3	M20EBA0WB	6.3
14AJP4	6.3	25DP4	6.3	M28-133	11.5
14ASP4	6.3	27ABP4	6.3	M36-11W	11.0
14AVP4	6.3	130AMB4	6.3	M38-334	6.3
15ADP4*	6.3	190DWP4	6.3	M61-120	6.3
15JP4*	6.3	250KB4	12.6	ST5449	6.3
16VDGP4	6.3	310AB4	6.3	ST6140	6.3
17BRP4	6.3	370LWB4	6.3	ST6198	6.3
18VAP4	6.3	590MB4	6.3	T40-06*	4.2
18VBQP4	6.3	A31-12W	6.3	T47-16*	4.2

NOTE: Set G1 to 50 V, except tubes marked with (\*), set G1 to 70 V.

Due to the number of CRT's that this adapter will fit, this is only a partial listing. For a complete listing, use the chart mailing service referred to below.

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the B & K-Precision chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRT's that have come out since the last mailing.

If you wish to take advantage of this service, contact:

**B & K-PRECISION**, Factory Service Department  
 Maxtec International Corporation  
 6470 West Cortland Street  
 Chicago, Illinois 60635  
 Telephone #: (312) 889-1448

For information on ordering a subscription.





