


CRT ADAPTER



CR-8

SOCKET WITH WIRES — 527-103-9-001

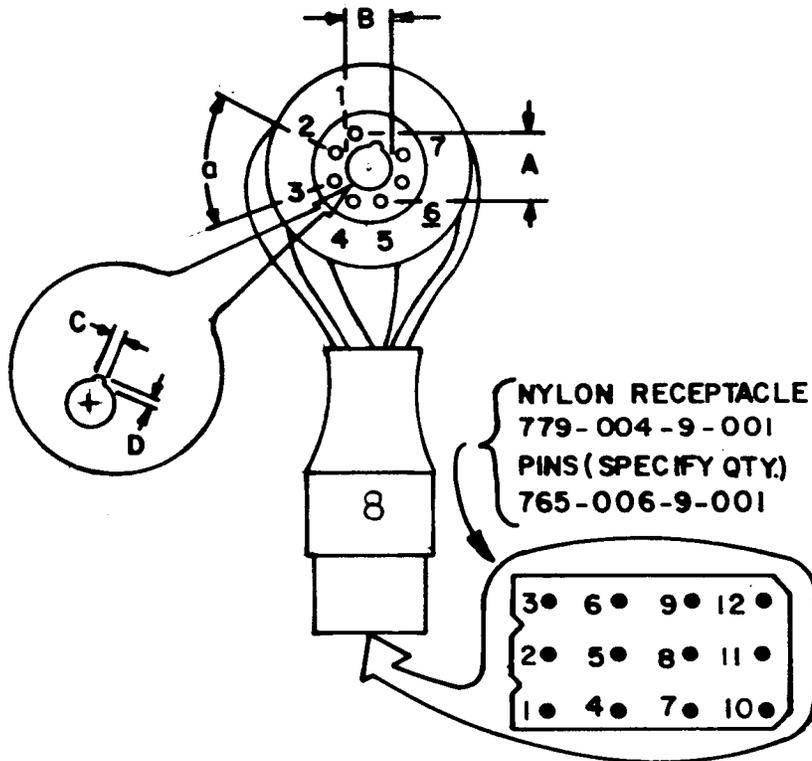

WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEPTACLE
1	WHT/BLU	6
2	YEL/RED	N.C.
3	BLK	1
4	BRN	2
5	GRN	3
6	RED	10
7	WHT	12

FITS CRT DIMENSIONS:

- A = pin circle diameter = 9.53 mm/0.375" nom.
- a = angular pin spacing = 45°
- B = post diameter = 5.51 mm/0.217" max.
- C = keyway width = 1.9 mm/0.075" nom.
- D = keyway width = 0.76 mm/0.030" nom.



FACTORY SERVICE OPERATIONS
6460 West Cortland Street
Chicago, Illinois 60635
(312)889-8870
Telex # 25-3475

Used with B & K-Precision Models: 467, 470

TUBE TYPE	HEATER VOLTAGE	TUBE TYPE	HEATER VOLTAGE	TUBE TYPE	HEATER VOLTAGE
9XP4	12.6	140CB4	12.0	230AHB4	12.6
85MPB4	6.0	140CVB4	12.6	230BLB4	12.0
110CB4	11.5	140FB4	12.6	230HB4	12.6
140AB4	12.0	150ACB4	12.0	280VB4	12.6
140ADB4	12.0	150JB4	12.6	280ZB4	12.0
140AKB4	12.6	200MB4	12.0	320BCB4	11.0
140BEB4	12.0	200SB4	12.0	A23-10W*	12.0
140BRB4	11.0	230ADB4	12.6	C316P4	12.0
		230AGB4	9.0		

Tubes marked with (*), set G1 to 70 V.

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the B & K-Precision chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRT's that have come out since the last mailing.

If you wish to take advantage of this service, contact:

B & K-PRECISION, DYNASCAN CORPORATION
FACTORY SERVICE OPERATIONS
 6460 West Cortland Street
 Chicago, Illinois 60635
 Telephone #: (312) 889-8870
 Telex #: 25-3475

For information on ordering a subscription.

B&K PRECISION **DYNASCAN**
CORPORATION

6460 West Cortland Street
 Chicago, Illinois 60635

