


# CRT ADAPTER

**BK** PRECISION

**CR-17**

**ASSEMBLY WITH WIRES**  
523-846-9-001

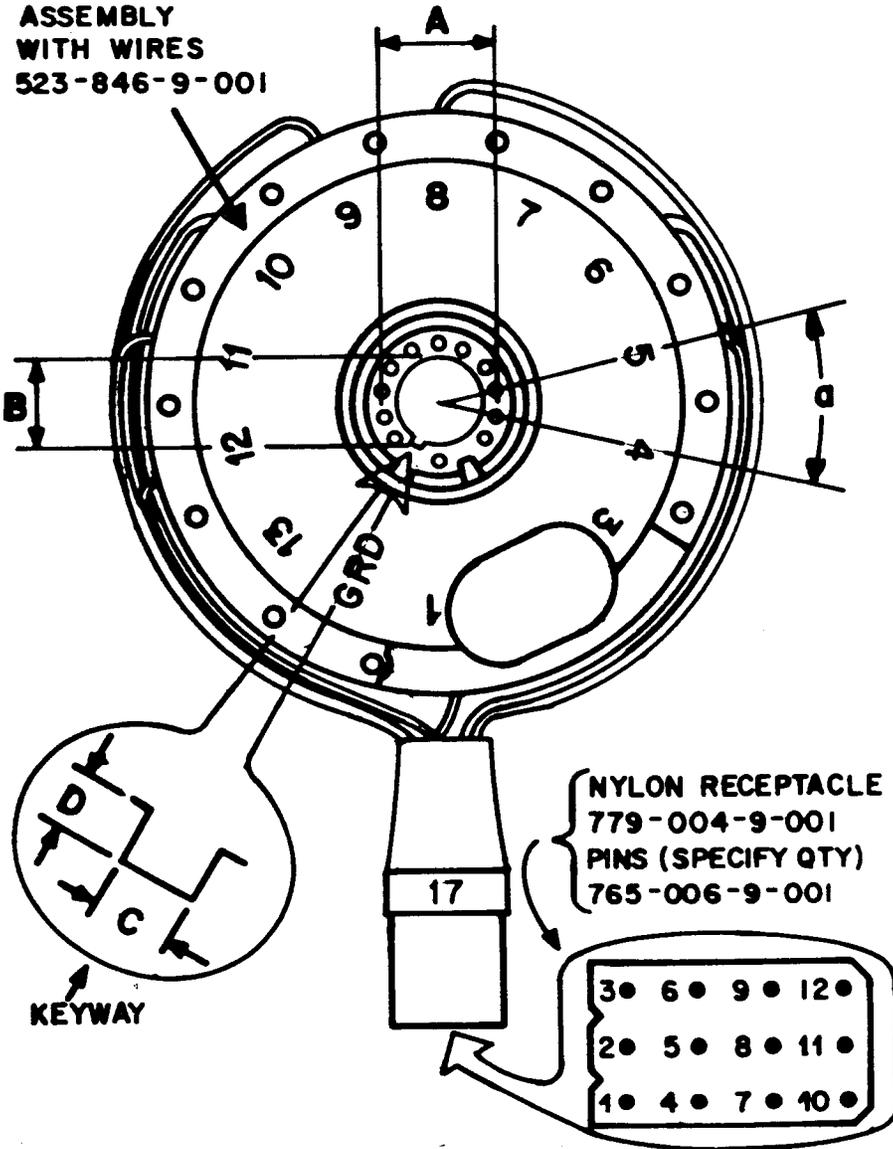

## WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEPTACLE
1	WHT	12
2	---	---
3	YEL/BLU	N.C.
4	BLU	3
5	WHT/BLU	10
6	BLK	1
7	BRN	2
8	YEL/RED	8
9	RED	N.C.
10	WHT/RED	7
11	WHT/GRN	N.C.
12	YEL/GRN	6
13	GRN	N.C.
14	keyway	---

### FITS CRT DIMENSIONS:

- A = pin circle diameter = 15.24 mm/0.600" nom.
- a = angular pin spacing = 25-5/7°
- B = post diameter = 11.4 mm/0.449" max.
- C = keyway width = 2.00 mm/0.079" max.
- D = keyway depth = 1.70 mm/0.067" max.

**BK** PRECISION **DYNASCAN CORPORATION**

FACTORY SERVICE OPERATIONS  
6460 West Cortland Street  
Chicago, Illinois 60635  
(312)889-8870  
Telex # 25-3475

**481-167-9-017B**

Used with B & K-Precision Models: 467, 470

TUBE TYPE	HEATER VOLTAGE
520HB22	6.3
570AB22	6.3
SD-49	6.3
SD-57	6.3

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the B & K-Precision chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRT's that have come out since the last mailing.

If you wish to take advantage of this service, contact:

**B & K-PRECISION, DYNASCAN CORPORATION**  
FACTORY SERVICE OPERATIONS  
6460 West Cortland Street  
Chicago, Illinois 60635  
Telephone #: (312) 889-8870  
Telex #: 25-3475

For information on ordering a subscription.

**B&K PRECISION** **DYNASCAN**  
**CORPORATION**

6460 West Cortland Street  
Chicago, Illinois 60635



