


CRT ADAPTER



ASSEMBLY
WITH WIRES
523-846-9-001

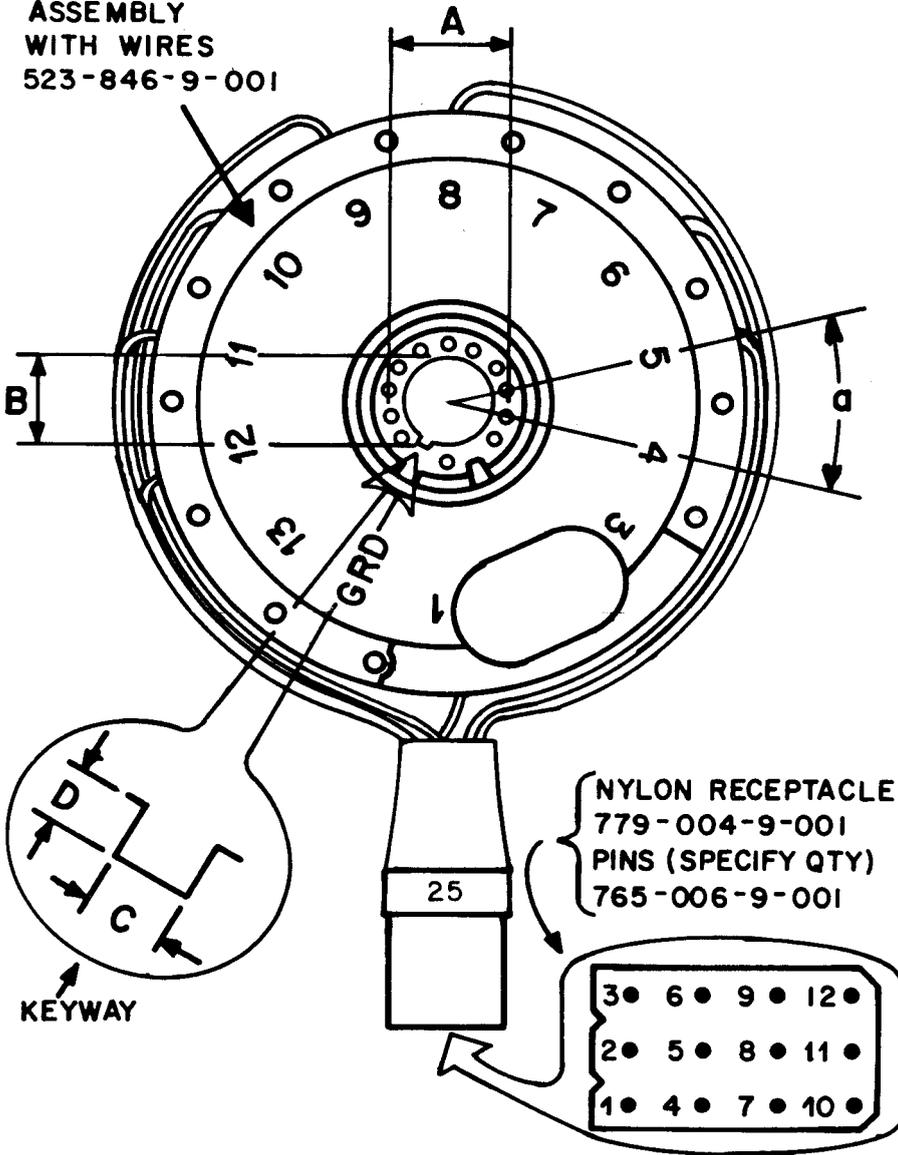

WIRING SCHEME

| CRT SOCKET PIN | WIRE COLOR | NYLON RECEPTACLE |
|----------------|------------|------------------|
| 1 | WHT | 12 |
| 2 | --- | --- |
| 3 | YEL/BLU | 8 |
| 4 | BLU | N.C. |
| 5 | WHT/BLU | N.C. |
| 6 | BLK | 1 |
| 7 | BRN | 2 |
| 8 | YEL/RED | 6 |
| 9 | RED | 3 |
| 10 | WHT/RED | 10 |
| 11 | WHT/GRN | N.C. |
| 12 | YEL/GRN | 7 |
| 13 | GRN | N.C. |
| 14 | keyway | --- |

FITS CRT DIMENSIONS:

- A = pin circle diameter = 15.24 mm/0.600" nom.
- a = angular pin spacing = 25-5/7°
- B = post diameter = 11.4 mm/0.449" max.
- C = keyway width = 2.00 mm/0.079" max.
- D = keyway depth = 1.70 mm/0.067" max.



BK PRECISION

B & K-PRECISION, Factory Service Department
Maxtec International Corporation
6470 West Cortland Street
Chicago, Illinois 60635
Telephone #: (312) 889-1448

Used with B & K-Precision Models: 467, 470

| TUBE TYPE | HEATER VOLTAGE | TUBE TYPE | HEATER VOLTAGE | TUBE TYPE | HEATER VOLTAGE |
|-----------|----------------|-----------|----------------|-----------|----------------|
| 9VBAP22 | 6.3 | 320ARB22 | 6.3 | 470JWB22 | 6.3 |
| 13VBEP22 | 6.3 | 320BTB22 | 6.3 | 470MFB22 | 6.3 |
| 13VBFP22 | 6.3 | 320BXB22 | 6.3 | 510FMB22 | 6.3 |
| 13VBHP22 | 6.3 | 320CGB22 | 6.3 | 510FYB22 | 6.3 |
| 13VBRP22 | 6.3 | 370BZB22 | 6.3 | 510HAB22 | 6.3 |
| 13VBUP22 | 6.3 | 370CRB22 | 6.3 | 510JUB22 | 6.3 |
| 13VCAP22 | 6.3 | 370ECB22 | 6.3 | 510KEB22 | 6.3 |
| 13VCBP22 | 6.3 | 370FCB22 | 6.3 | 510LXB22 | 6.3 |
| 15VARP22 | 6.3 | 370FNB22 | 6.3 | 510NJB22 | 6.3 |
| 15VAWP22 | 6.3 | 370JXB22 | 6.3 | 510RUB22 | 6.3 |
| 19VHWP22 | 6.3 | 420AGB22 | 6.3 | 510XUB22 | 6.3 |
| 19VHZP22 | 6.3 | 420BSB22 | 6.3 | 560BLB22 | 6.3 |
| 19VJBP22 | 6.3 | 420BZB22 | 6.3 | 560CLB22 | 6.3 |
| 19VLCB22 | 6.3 | 420CEB22 | 6.3 | 670BCB22 | 6.3 |
| 19VMTP22 | 6.3 | 420CYB22 | 6.3 | 670KKB22 | 6.3 |
| 140AXB22 | 2.8 | 420DCB22 | 6.3 | 3701B22 | 6.3 |
| 200TB22 | 11.0 | 420FAB22 | 6.3 | A33AAL01X | 6.3 |
| 250AFB22 | 6.3 | 420FJB22 | 6.3 | A48ABY00X | 6.3 |
| 250AGB22 | 6.3 | 470AYB22 | 6.3 | M26JET60X | 6.3 |

Due to the number of CRTs that this adapter will fit, this is only a partial listing. For a complete listing, use the chart mailing service referred to below.

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the B & K-Precision chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRTs that have come out since the last mailing.

If you wish to take advantage of this service, contact:

B & K-PRECISION, Factory Service Department
 Maxtec International Corporation
 6470 West Cortland Street
 Chicago, Illinois 60635
 Telephone #: (312) 889-1448

For information on ordering a subscription.

