


CG19 PARTS LIST

<u>REFERENCE</u>	<u>DESCRIPTION</u>	<u>PART NO.</u>	<u>PRICE</u>
CONTROLS			
R10	5K 30% VERT P. C. MTG.	15G61	\$.75
R12, R23	10K 30% TAB MTG.	15A80	1.35
R11	5K 30% TAB MTG.	15A39A	1.35
R22	25K VERT P. C. MTG.	15G81	.75
R36	10K 30% CARBON LIN	15A83	1.50
R51	2K 10% CARBON LIN	15G24	1.50
R99	100K VERT. P. C. MTG.	15G85	.75
SEMICONDUCTORS			
CR2, 4, 5, 6, 7	Diode 1N34A	19G13	.50
CR3	Diode 1N695	19G28A	.65
CR1	Diode Zener 8.2V	50G8	1.95
TR1, 3, 4, 5, 6, 9 10, 11, 12, 13, 25	Transistor 2N5172	19G29	.75
TR2, 8	Transistor 2N4248	19G21	.75
TR7	Transistor 40234	16G17	1.25
TR14	Transistor 2N1180	19G7	1.75
CAPACITORS			
C15	Trimmer 3.5-25PF	24A204	.50
C19, 49	Trimmer 5-50 PF TAB MTG.	24A205	.50
SWITCHES			
S1	5P5P Rotary	25A126	3.25
S2	1P2P Slide	25G4A	.50
MISC			
	189 KHz crystal	47G1	8.00
	3.56 MHz crystal	47G3	5.00
L1	.12UH Coil	46A42	.25
T1, 2, 3	Coil, Blocking OSC	46A32	1.25
	Battery Holder	11G14	.50
	Case Complete	10C249	

(PRICES SUBJECT TO CHANGE WITHOUT NOTICE)


SCHEMATIC AND PARTS LIST FOR CG19 CADDY BAR COLOR GENERATOR



SENCORE

NO. 1 MANUFACTURER OF ELECTRONIC MAINTENANCE EQUIPMENT

426 SOUTH WESTGATE DRIVE, ADDISON, ILLINOIS 60101

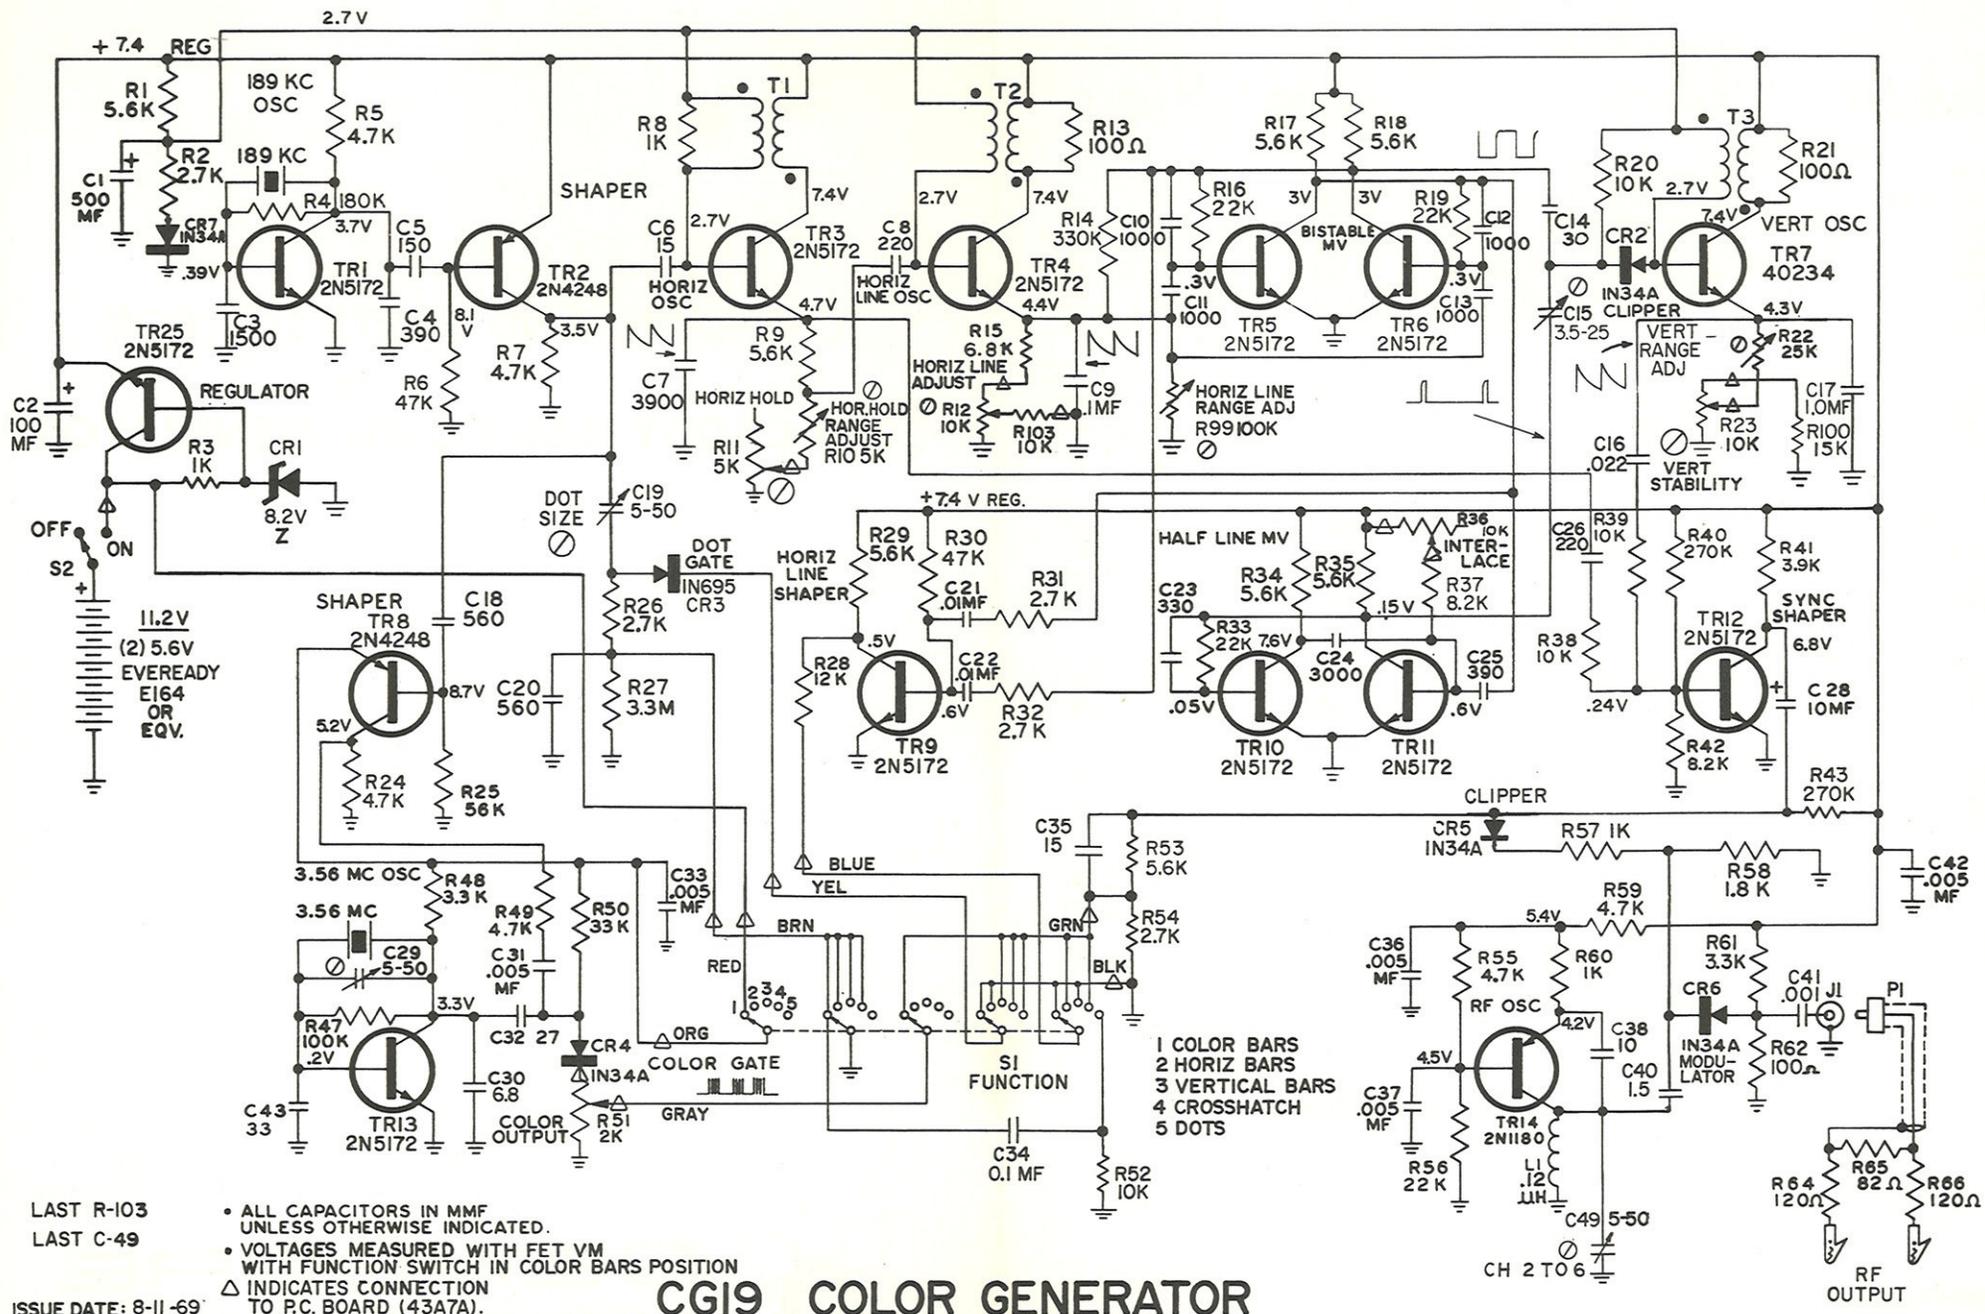

LAST R-103
LAST C-49

- ALL CAPACITORS IN MMF UNLESS OTHERWISE INDICATED.
- VOLTAGES MEASURED WITH FET VM WITH FUNCTION SWITCH IN COLOR BARS POSITION
- △ INDICATES CONNECTION TO P.C. BOARD (43A7A).

CG19 COLOR GENERATOR

ISSUE DATE: 8-11-69