
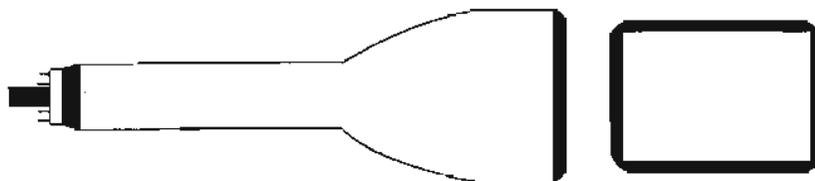
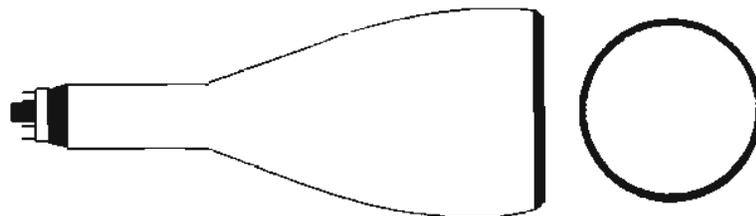


CR70

ManualsPlus.com

“BEAM BUILDER”™

1991 SETUP BOOK

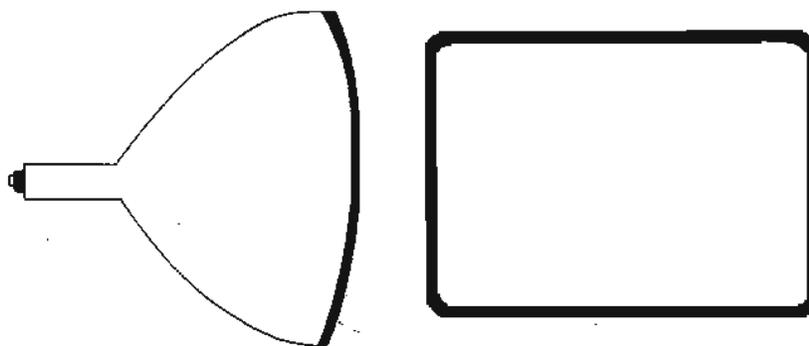

SENCORE

Do not defeat the third wire ground — This voids all CR70 warranties and subjects the user to an extreme shock hazard.

Using the 39G170 Universal Adapter

The CRTs that are listed in this book with “UA” in the socket column require that you use the Universal Adapter to test them. The numbers listed in the setup information are the *pin numbers to test each gun*. Always set the Individual Gun Setup switches as follows when using the UA: F1 to 1, F2 to 2, K to 3, G1 to 4, and G2 to 5. For the example of the 5AKP4 listed below connect the F1 clip to CRT pin 1, the F2 clip to CRT pin 12, the K clip to CRT pin 11, the G1 clip to CRT pin 2 and the G2 clip to CRT pin 10. All the remaining tests are identical to those using a standard socket.

CRT NUMBER	SKT	CRT TYPE	F ¹	F ²	FIL	NEG BIAS	GUN	K	G1	G2
5AKP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10

Tubes Ending With “TC01” or “TC02” Numbers

This book does not list tubes with numbers ending in TC01, TC02, etc. “TC” endings refer only to the type of yoke plug used to connect the permanently mounted bounded yoke to the chassis. The tube is identical to one with a “P22” or “B22” ending. For example, a 15VAETC01 CRT is identical to a 15VAEP22.

Tubes Ending With “X01” or “WW01”

This book does not list tubes with WTDS numbers ending in “X01”, “X02” or “WW01”, “WW02”, etc. As with the “TC” endings explained above, these numbers refer only to the type of yoke attached to the CRT. Therefore these tubes are identical to the numbers listed in this book without the “X01” or “WW01” ending. For example, an A63AA00X is identical to an A63AAA00X01 and an A47AAD0WW is identical to an A47AAD0WW01.

Tubes With Different Phosphors

Some WTDS numbered monitor tubes are identical except for phosphor type. The last two letters of a WTDS number indicate phosphor type. Thus the tubes M35JJA4GR and M35JJA4WH require the same setup. This book lists only one phosphor version of WTDS numbered tubes.

The CRT bases which require the use of sockets 5 and 10 are interchanged by CRT manufacturers. If the setup calls for the use of socket 5 or 10, either socket may fit, depending on the particular CRT. Follow the setup switch positions listed in the book and use either socket 5 or 10 to connect to the base.

Testing Tubes With Directly Heated Cathodes

In CRTs that have directly heated cathodes the filament and cathode are the same element instead of two separate elements as in conventional CRTs. You must make different filament connections and cathode connections (in addition to the G1 and G2 connections) to test each gun of a CRT that uses a directly heated cathode. Connect the F1 and F2 leads to the filament as you would in conventional CRTs. But make the cathode connection by connecting the "K" lead of the UA to either of the filament leads if you are using the UA. Keep the switches set as usual when using the UA (F1-1, F2-2, K-3, G1-4, G2-5).

If you use a socket other than the UA, set the F1, F2, G1 and G2 switches as you normally would. To make the cathode connection set the "K" switch to the same setting as either the "F1" or "F2" switch. For multiple-gun CRTs you will connect to a different filament and cathode for each gun. Disregard any H-K short indication when testing directly heated cathode CRTs.

Discharge CRT Before Connecting

You should always discharge the high voltage of the CRT **before disconnecting the CRT socket** in the receiver, monitor or oscilloscope in which the CRT is used. This prevents possible damage to the other components in the receiver, monitor or oscilloscope and prevents possible shock hazards to you or someone standing near by. This is especially important on a chassis that does not use a bleeder resistor in the high voltage tripler or flyback transformer. Use an insulated clip lead to connect between the high voltage connector and the ground clip running to the CRT or CRT shield. **Do not discharge the CRT to chassis ground unless instructed to do so in the service literature for the chassis containing the CRT.**

Special Note

Setup information is taken from many different sources. Every effort is made to insure accurate setups. However, errors occasionally occur as schematic information is converted to setup data. Notify the Sencore Field Application Department if you think you have found an error.

SPECIAL NOTES

Sockets 5 and 10 (5/10)

CRT bases using sockets 5 and 10 may be interchanged by the tube manufacturer. If the socket listed doesn't mechanically fit the tube, try the alternate socket. These sockets are electrically identical so the set-up remains the same.

Sockets 8/UA and 13/UA

Several tubes are listed as using sockets "8/UA" or "13/UA". Use the socket listed, 8 or 13, if you have it. If you don't have the socket, use the Universal Adapter.

Tubes With "TC" Endings

This book does not list tubes with endings of TC01, TC02, etc. "TC" endings refer only to the bonded yoke. These tubes are identical to ones with a "P22" or "B22" ending.

Tubes beginning with "MV"

When testing a tube beginning with "MV", the listing will be found by dropping the MV and looking up the remainder of the tube number. For example, MVA63AAMOOX will be found listed as A63AAMOOX.

Using The Universal Adapter (UA)


The set-up numbers in this book refer to the pin numbers of the CRT gun elements. Connect the UA leads to the CRT pins by using the set-up information listed in this book. However, the CR70 switches must be set up as follows:

CR70 Switch	UA Switch Setting
F1	1
F2	2
K	3
G1	4
G2	5



The CR70 switches must be set at these positions when using the UA on any tube.

SIMPLIFIED SETUP INSTRUCTIONS



1. Find CRT in setup book.
2. Connect correct socket to tester cable and CRT.




3. Set the CRT PRESET CONTROLS before applying power.
These settings won't change for the rest of the tests.

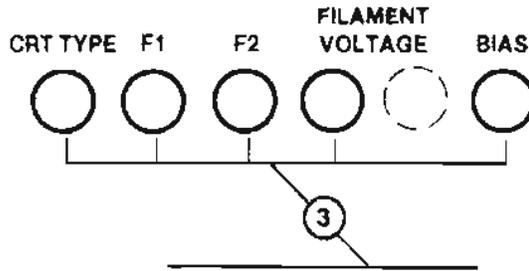

4. Set the INDIVIDUAL GUN SETUP switches.
Note: These must be changed for each gun of a color CRT. Test for H-K Shorts, G1 Shorts, Cutoff and Emission before changing switches.

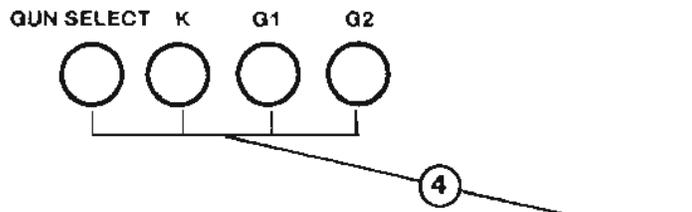

5. Select the FIL SET FUNCTION.
6. Apply power.
7. Adjust the FIL SET control to the proper voltage as shown on the top meter scale.

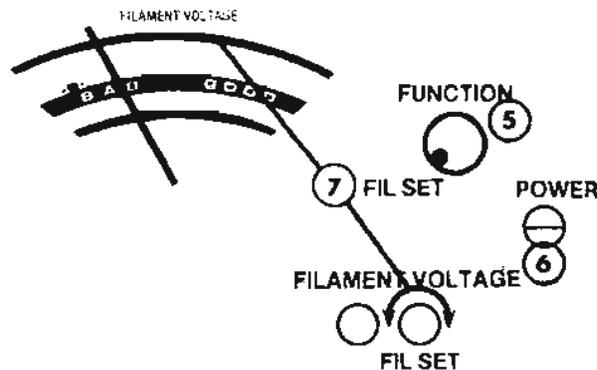


SIMPLIFIED TEST INSTRUCTIONS

NOTES:

1. Reset **INDIVIDUAL GUN SETUP** switches for each gun of a color CRT after performing Shorts, Cutoff, and Emission tests.
2. Test all three guns of a color CRT for Shorts, Cutoff and Emission before testing **COLOR TRACKING**.

H-K SHORTS and G1 SHORTS Tests

1. Set to the **H-K SHORTS FUNCTION**.
2. Read on **GOOD/BAD Scale**.
3. Repeat for the **G1 SHORTS SHORTS FUNCTION**.

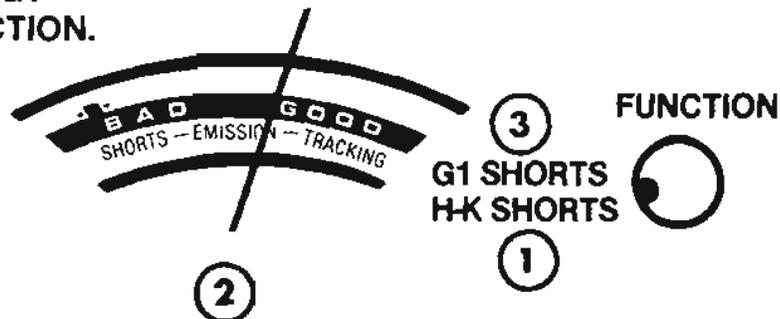


SHORTS test results:

H-K SHORTS Test indicates bad: These can't be removed.

G1 SHORTS Test indicates bad: Perform the **REMOVE G1 SHORTS FUNCTION**. Repeat the **G1 SHORTS** test to confirm the short is removed. See manual if short remains after 3 attempts at removal.

CUTOFF Test (contrast test)

1. Set to **CUTOFF FUNCTION**.
2. Adjust **CUTOFF SET** control for meter reading in **CUTOFF SET** area of meter.

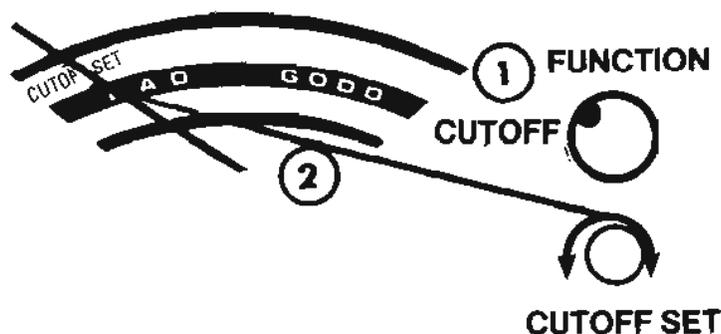


CUTOFF test results:

Meter Indication	Tube Condition
Adjusts into box	Tube has good contrast
Stays below box	(Poor tube) Tube has poor contrast
Stays above box	(Bad tube) Tube has open control grid (G1).

EMISSION Test

1. Set to EMISSION FUNCTION.
2. Read GOOD/BAD meter scale.
3. Push EMISSION/LIFE TEST.

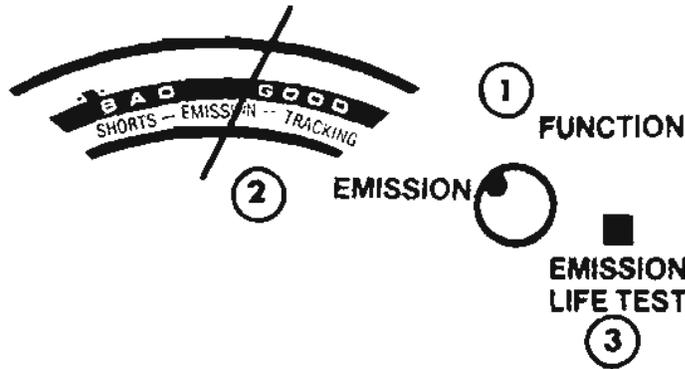


EMISSION LIFE test results:

Meter Indication	Probable Life
Meter doesn't move	12 months or more
Meter drops ¼ inch	8-12 months
Meter drops to bottom of green area	4-8 months
Meter drops into "bad" area	Less than 4 months

COLOR TRACKING Test

NOTE: You must test all 3 guns for Shorts, Cutoff, and Emission before testing color tracking.

1. Set to COLOR TRACKING FUNCTION.
2. Set GUN SELECT to "R".
3. Read GOOD/BAD meter scale.
4. Repeat for G and B guns.

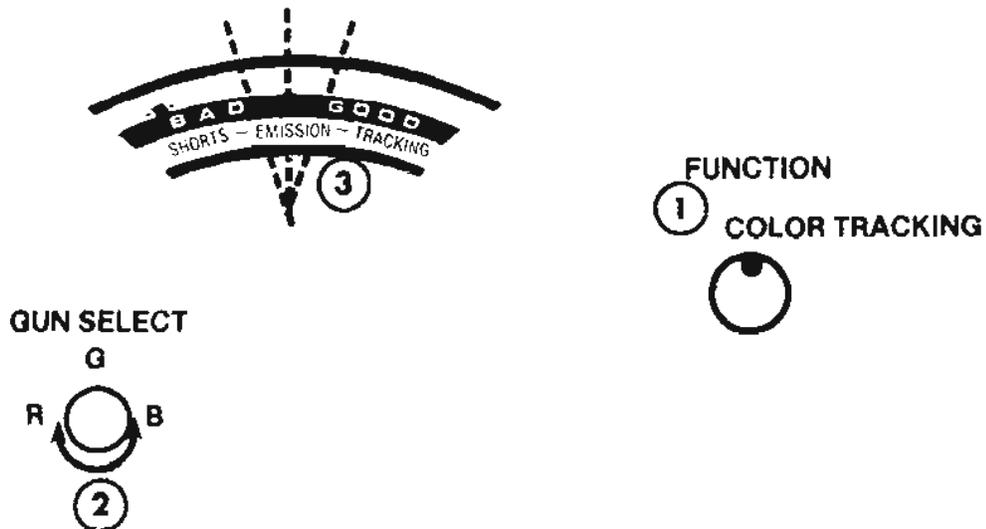

COLOR TRACKING test results:

"Bad" gun or guns more than 50% lower than strongest gun.

SIMPLIFIED BEAM BUILDING INSTRUCTIONS

Always use the results of the Shorts, Cutoff, Emission and Emission Life Tests to determine which Beam Building methods to use.

Test Results


Cutoff	Emission	Tracking	Life	Cathode Beam Building Procedure
Good	Bad			Auto Cycle; Manual 1 if still weak
Bad	Good			Auto Cycle
Bad	Bad			One shot Rejuv, then Auto Cycle
Good	Good	Good	Bad	Auto Cycle
Good	Good	Bad		Auto Cycle lowest gun

Refer to manual for further information.

REMOVE G1 SHORTS


1. Select REMOVE G1 SHORT FUNCTION.
2. Set INDIVIDUAL GUN setup switches to the bad gun from G1 SHORTS test.
3. Push the REJUV OR RESTORE button and watch for a flash in the CRT neck.
4. Repeat the G1 SHORTS test.

NOTE: Repeat up to 3 times if necessary.




REJUV

1. Select the REJUV FUNCTION.
2. Set INDIVIDUAL GUN SETUP switches to the bad gun from the EMISSION or TRACKING test.
3. Push the REJUV OR RESTORE button and watch for a flash in the CRT.
4. Repeat the EMISSION and TRACKING tests.




AUTO RESTORE

1. Select the AUTO RESTORE FUNCTION.
2. Set INDIVIDUAL GUN SETUP switches to the weak gun from emission test.
3. Hold the REJUV OR RESTORE button until the current cycles three times as indicated on the meter.
4. Repeat the EMISSION and TRACKING tests.

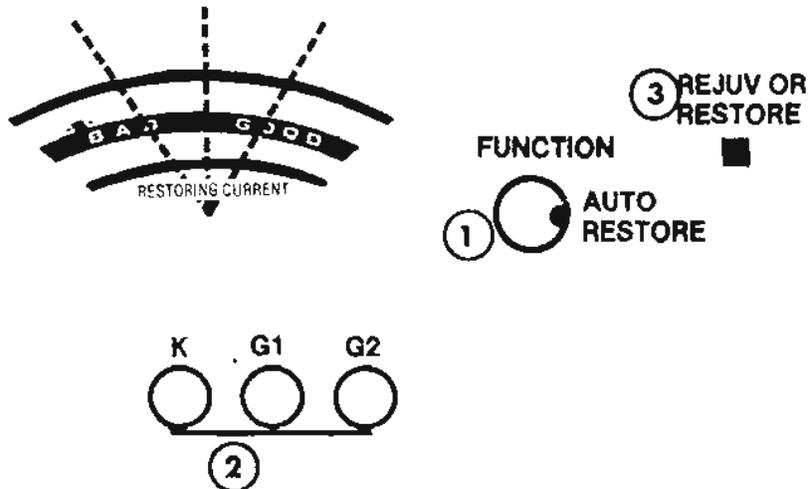

MANUAL RESTORE

1. Select the MANUAL 1 RESTORE FUNCTION.
2. Set INDIVIDUAL GUN SETUP switches to the weak gun from EMISSION or TRACKING test.
3. Hold the REJUV OR RESTORE button in only as long as the metered current (bottom scale) increases, not to exceed 15 seconds.
4. If, after 15 seconds, the RESTORING CURRENT is still increasing, release button and wait 10 seconds before continuing.
5. Repeat the EMISSION and TRACKING tests.
6. Use MANUAL 2 RESTORE only if MANUAL 1 or REJUV fail to restore emission.

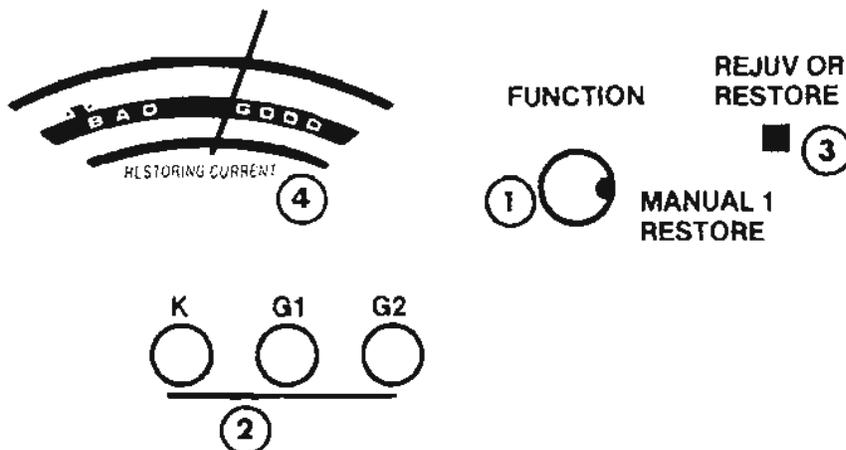

Index

Sequential Listing Of All Tubes	7
Camera Pickup Tubes	288
Scope Tubes	290
Projection Tubes	291

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
2EP4	4	VIDEO	1	8	6.0	20V	B/W	7	3	2
02JM*	UA	VIDEO	6	3	0.5	52V	B/W	6	5	1
3ATP1	4	SCOPE	3	8	6.3	68V	B/W	6	4	1
3AUP1	4	SCOPE	5	7	2.68	68V	B/W	6	1	3
3BSP1	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
3BSP2	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
3BSP7	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
3BSP11	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
3RP1A	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
3VABP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
4CP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
04JM*	UA	VIDEO	3	7	0.6	52V	B/W	3	2	1
4M33P-M	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
5ACP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
5AKP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
5AXP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
5BMP1	UA	SCOPE	1	14	6.3	68V	B/W	2	3	5
5BMP2	UA	SCOPE	1	14	6.3	68V	B/W	2	3	5
5BMP15	UA	SCOPE	1	14	6.3	68V	B/W	2	3	5
5BNP16	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
5CEP4	UA	VIDEO	1	12	6.3	20V	B/W	11	2	10
5CEP11	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
5CEP16	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
5CUP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
5DEP1	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
5EMP4	6	VIDEO	3	4	12.0	36V	B/W	1	5	6
5M140P-M	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
5M192P	UA	SCOPE	2	8	12.6	68V	B/W	5	4	3
5M259PT	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
5ST6107	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
5ST6111	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
5TP4	UA	VIDEO	1	12	6.3	68V	B/W	11	2	10
5UP1	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
5VABP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
5VACP4	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
5VADP4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
5VAEP4	6	VIDEO	3	4	11.5	52V	B/W	2	5	6
5VAFP4	6	VIDEO	3	4	6.3	20V	B/W	2	5	6
5VAGP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
5VAHP4	6	VIDEO	3	4	6.5	20V	B/W	2	5	6
5VAP4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
5WP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
5ZP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
5ZP15	UA	VIDEO	1	12	6.3	68V	B/W	11	2	10
5ZP16	UA	VIDEO	1	12	6.3	68V	B/W	11	2	10
5ZP24	UA	VIDEO	1	12	6.3	68V	B/W	11	2	10
5ZP47	UA	VIDEO	1	12	6.3	68V	B/W	11	2	10
6ABP1	3	VIDEO	7	9	6.3	36V	B/W	12	10	4
6ABP55	3	VIDEO	7	9	6.3	36V	B/W	12	10	4
6ABP56	3	VIDEO	7	9	6.3	36V	B/W	12	10	4
6ST6191P22	2	PROJ	1	14	6.3	52V	B/W	13	12	11
7ABP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
7AJP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
7ARP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
7BCP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
7BEP10	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
7CP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
7DP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
7HP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
7M151P	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
7MP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
7NP4	2	VIDEO	1	14	6.3	52V	B/W	2	3	4
7QP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
7RP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10

* DIRECTLY HEATED CATHODE - SEE OPERATING NOTES

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
7ST6611P22	UA	PROJ	6	7	6.3	52V	B/W	8	5	10
7TP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
8AP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
8C0-30	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
8DP4	UA	VIDEO	1	12	6.3	20V	B/W	11	2	10
8FP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
8HP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
8JP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
8K30-15	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
8KP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
8LP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
8MP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
8NP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
8QP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
8VABP4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
8XP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
8YP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
9ABP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
9ACP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
9ADP4	4	VIDEO	1	8	6.3	20V	B/W	7	2	3
9AEP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
9AGP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
9AHP4	6	VIDEO	3	4	9.45	36V	B/W	2	5	6
9M25P	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
9QP4	UA	VIDEO	1	12	4.7	52V	B/W	11	2	10
9SC5902	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
9SC5904	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
9SP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
9ST4716	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
9ST4748	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
9ST6112	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
9TP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
9UP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
9VAB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
9VABP4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
9VACP22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
9VADP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
9VAEP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
9VAGP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
9VAHP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
9VAJP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
9VAKP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
9VALP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
9VAMP4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
9VANP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
9VAQP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
9VARP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
9VASP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
9VATP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
9VAUP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
9VAWP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
9VAYP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
9VAZP4	6	VIDEO	3	4	11.5	52V	B/W	2	5	6
9VBAP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
9VBCP4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
9VBDP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
9VP4	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
9WP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
9XP4	6	VIDEO	3	4	12.0	20V	B/W	1	5	6
9YP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
10ABP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
10ADP4	UA	VIDEO	1	12	8.4	52V	B/W	11	2	10
10AEP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
10AJP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
10AKP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
10ANP4	UA	SCOPE	2	8	6.3	68V	B/W	5	4	3
10ARP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
10ASP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
10ATP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
10ATY4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
10ATY39N	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
10AUP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
10AVP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
10BP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
10CP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
10DP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
10EP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
10FDP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
10FP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
10KP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
10MP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
10NP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
10RP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
10SP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
10ST5440	6	VIDEO	3	4	12	52V	B/W	2	5	6
10ST5453	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
10ST5497	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
10ST6105	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
10ST6122	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
10UP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
10VABP22	2	VIDEO	1	14	6.3	68V	R	11	13	12
							G	7	3	2
							B	4	6	5
10VACP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
10VADP22	2	VIDEO	1	14	6.3	52V	R	7	3	2
							G	11	13	12
							B	4	6	5
10VAEP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
10VAFP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
10VAGP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
10VAHP22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
10VAJP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
10VHEP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
10VLYP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
10VP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
10WP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
10WP7	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
11AP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
11BP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
11CP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
11DP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
11EP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
11FP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
11GP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
11HP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
11JP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
11KP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
11LP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
11MP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
11NP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
11QP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
11RP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
11SP22	2	VIDEO	4	11	13.8	36V	R	6	2	3
							G	6	7	1
							B	6	14	13
11TP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
11UP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
11WP22	2	VIDEO	4	11	13.8	36V	R	6	2	3
							G	6	7	1
							B	6	14	13
12ABP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
12AFP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
12AGP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
12ALP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
12AWP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12AYP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
12AZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
12BAP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
12BDP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
12BEP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
12BFP4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
12BGP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
12BHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
12BJP4	4	VIDEO	1	8	4.2	36V	B/W	7	2	3
12BKP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
12BLP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
12BMP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12BNP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
12BQP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
12BSP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
12BTP4	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
12BUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
12BVP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12BWP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
12BXP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
12BZP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12CAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
12CBP4	UA	VIDEO	3	4	6.3	52V	B/W	2	5	7
12CDP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12CEP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12CFP4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
12CGP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
12CHP4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
12CKP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12CLP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12CMP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12CNP4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
12CQP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
12CRP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12CSP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12CTP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12CUP4	UA	VIDEO	3	4	12.0	36V	B/W	2	5	7
12CVP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12CWP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12CXP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12CYP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12CZP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12DCP22	2	VIDEO	1	14	6.3	52V	R	2	3	4
							G	6	7	5
							B	11	12	13
12DEP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12DFP4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
12DGP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12DHP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
12DKP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12DLP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12DMP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
12DNP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12DQP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
12DRP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12DSP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12DUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
12EE1050	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12GBY31N	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
12JP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
12KP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
12LP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
12M149P	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12NBY31	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
12NBY39	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
12QP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
12RP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
12SP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
12ST4500	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
12ST4543	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
12ST5427	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
12ST5448	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
12ST5449	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
12ST5452	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
12ST5454	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
12ST5470	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
12ST5493	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
12ST6139	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
12TP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
12UP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
12VABP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
12VADP22	2	VIDEO	1	14	6.3	52V	R	2	3	4
							G	6	7	5
							B	11	12	13
12VAEP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12VAFP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12VAGP4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
12VAHP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
12VAJP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
12VALP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
12VAMP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12VANP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12VAQP4	6	VIDEO	3	4	4.2	52V	B/W	2	5	6
12VARP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
12VASP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
12VATP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
12VAUP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12VAWP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12VAXP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
12VAZP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12VBAP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
12VBCP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12VBDP4	6	VIDEO	3	4	11	36V	B/W	2	5	6
12VBEP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12VBEP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
12VBFP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12VBGP4	6	VIDEO	3	4	12	52V	B/W	2	5	6
12VBHP4	6	VIDEO	3	4	11	36V	B/W	2	5	6
12VBJP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
12VBLP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12VBMP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12VBNP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
12VBQP4	6	VIDEO	3	4	11	36V	B/W	2	5	6
12VBRP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
12VBRP22	6	VIDEO	3	4	11	52V	B/W	2	5	6
12VBSP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
12VBTP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
12VBUP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
12VBWP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
12VBXP4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
12VBYP4	6	VIDEO	3	4	11.4	52V	B/W	2	5	6
12VBZP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12VCAP4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
12VCBP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
12VCDP4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
12VCEP4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
12VCFP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
12VCGP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
12VCHP7	UA	SCOPE	2	8	6.3	52V	B/W	5	4	3
12VCJP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
12VCKP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
12VCLP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
12VCM P4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
12VCQP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
12VCRP4	6	VIDEO	3	4	11	68V	B/W	2	5	6
12VCSP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
12VCTP4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
12VCUP4	6	VIDEO	3	4	11.0	68V	B/W	2	5	6
12VCVP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
12VCWP4	6	VIDEO	3	4	11.5	68V	B/W	2	5	6
12VCXP4	6	VIDEO	3	4	11	36V	B/W	2	5	6
12VCYP4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
12XP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
12YP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
12ZBY4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
12ZBY31	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
12ZDY31N	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
12ZP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
13AHP22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
13AP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
13BDP4	UA	VIDEO	1	12	6.3	20V	B/W	11	2	10
13BEP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
13BP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
13BVSP22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
13CP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
13DP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
13EP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
13FP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
13GP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
13HP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
13JP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
13KP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
13LP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
13MP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
13VABP4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
13VADP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
13VAEP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
13VAFP22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
13VAGP22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
13VAHP22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
13VAJP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
13VAKP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
13VAMP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
13VANP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
13VAQP4	6	VIDEO	3	4	12	52V	B/W	2	5	6
13VARP4	6	VIDEO	3	4	12	52V	B/W	2	5	6
13VASP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
13VATP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
13VAUP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
13VAVP22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
13VAWP22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
13VAYP22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
13VAZP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
13VBAP22	7	VIDEO	7	8	6.3	52V	R	12	9	11
							G	10	9	11
							B	13	9	11
13VBCP4	6	VIDEO	3	4	11.5	68V	B/W	2	5	6
13VBDP4	6	VIDEO	3	4	11.5	68V	B/W	2	5	6
13VBEP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
13VFBFB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
13VBF22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
13VBGP22	2	VIDEO	1	14	6.3	68V	R	4	3	5
							G	7	3	2
							B	11	3	12
13VBHP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
13VBJP22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
13VBKP4	6	VIDEO	3	4	11.0	68V	B/W	2	5	6
13VBLP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
13VBMP22	7	VIDEO	7	8	6.3	52V	R	12	9	11
							G	10	9	11
							B	13	9	11
13VBNP22	7	VIDEO	7	8	6.3	68V	R	12	9	11
							G	10	9	11
							B	13	9	11
13VBRP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
13VBSP22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
13VBTP22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
13VBUP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
13VBWP22	7	VIDEO	7	8	6.3	52V	R	12	9	11
							G	10	9	11
							B	13	9	11
13VCAP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
13VCBP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
13VGAP22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
14ACP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14AEP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14AFP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
14AJP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
14AP4	UA	VIDEO	1	12	2.7	36V	B/W	11	2	10
14AQP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
14ARP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14ASP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
14ATP4	UA	VIDEO	1	12	8.4	36V	B/W	11	2	10
14AUP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14AVP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
14AWP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14AZP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
14BAP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14BCP22	8/UA	VIDEO	1	14	6.3	68V	R	4	2	3
							G	5	6	7
							B	13	12	11
14BDP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14BEP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
14BFP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
14BP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
14BRP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14CP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14DP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
14EP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14FP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14GP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14HP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
14KP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
14NP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14QP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
14RP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14SP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14UP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14VABP22	2	VIDEO	1	14	6.3	52V	R	2	3	4
							G	6	7	5
							B	11	12	13
14VACP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
14VADP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
14VAEP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
14VAFP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
14VAGP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
14VAHP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
14VAJP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
14VAKP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
14VALP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
14VAMP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
14VANP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
14VAQP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
14VARP4	4	VIDEO	1	8	11.0	52V	B/W	7	2	3
14WP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14XP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
14ZP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
15AAEP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
15ABP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
15ACP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
15ADP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
15AEP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
15AFP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
15AGP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
15AHP22	2	VIDEO	1	14	6.3	52V	R	2	3	4
							G	6	7	5
							B	11	12	13
15AJP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
15AP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
15AP22	2	VIDEO	1	14	6.3	52V	R	2	3	4
							G	6	7	5
							B	11	12	13
15CP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
15DP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
15EP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
15FP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
15GP22	UA	VIDEO	1	20	6.3	68V	R	2	3	4
							G	7	8	9
							B	19	18	17
15HP22	UA	VIDEO	1	20	6.3	68V	R	2	3	4
							G	7	8	9
							B	19	18	17
15JP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
15KP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
15LP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
15M24P	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
15MP22	2	VIDEO	1	14	6.3	52V	R	7	3	2
							G	11	13	12
							B	4	6	5
15NP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
15QP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
15RP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
15SP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
15ST4730	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
15ST6140	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
15ST6148	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
15ST6153	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
15TP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
15UP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
15VABP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
15VACP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
15VACP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
15VADP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
15VAEP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
15VAFP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
15VAGP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
15VAHP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
15VAJP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
15VALP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
15VAMP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
15VANP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
15VARP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
15VASP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
15VASP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	3 3 3	5 2 12
15VATP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
15VAUP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
15VAWP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
15VAXP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
15VAYP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
15VAZP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
15VGAP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
15WP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
15XP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
15YP22	2	VIDEO	1	14	6.3	52V	R G B	7 11 4	3 13 6	2 12 5
15ZP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16ABP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16ACP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
16ADP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16AEP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16AFP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
16AGP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
16AHP7	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
16AKP7	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
16ALP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16ALP7	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
16ANP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16AP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16AQP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16ASP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16ATP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16AUP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16AVP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
16AWP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16AXP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16AYP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16AZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BAP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BCP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
16BDP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BFP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BGP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BJP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16BKP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BLP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BMP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BNP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BQP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16BRP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16BSP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BTP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16BUP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BVG22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16BVP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BWP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BXP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
16BYP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16BZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16CAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16CBP22	8/UA	VIDEO	1	14	6.3	68V	R G B	4 5 13	2 6 12	3 7 11

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
16CDP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16CEP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16CFP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
16CGP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16CHP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16CJP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16CKP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16CLP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16CMP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16CNP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
16CP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16CQP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
16CRP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16CSP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16CTP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16CUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16CVP4	4	VIDEO	1	8	4.2	52V	B/W	7	2	3
16CWP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
16CXP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
16CYP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16DAP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16DCP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
16DEP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
16DP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
16DQP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16EP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16FP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
16GP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16GWP4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
16HP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16JP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
16KP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16LP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16M135P	2	VIDEO	1	14	6.3	68V	B/W	13	5	11
16M175P	2	VIDEO	1	14	6.3	68V	B/W	13	5	11
16MP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16QP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
16RP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16SP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16TP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16UP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16VABP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VABP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VACP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VADP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VAEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
16VAFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VAGP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VAHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VAJP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16VAKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VALP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VAMP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VANP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VAQP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VARP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VASP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VATP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VAUP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VAWP22	2	VIDEO	1	14	6.3	20V	R G B	7 11 4	3 13 6	2 12 5
16VAXP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VAYP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16VAZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16VBAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VBCP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16VBDP22	2	VIDEO	1	14	6.3	20V	R G B	7 11 4	3 13 6	2 12 5
16VBEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VBFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VBGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VBHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
16VBJP4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
16VBKP4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
16VBLP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VBMP22	2	VIDEO	1	14	6.3	36V	R G B	7 11 4	3 13 6	2 12 5
16VBNP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16VBQP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VBRP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VBSP22	2	VIDEO	1	14	6.3	52V	R G B	7 11 4	3 13 6	2 12 5

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
16VBTP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16VBUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VBWP4	4	VIDEO	1	8	11.0	52V	B/W	7	2	3
16VBXP4	4	VIDEO	1	8	11.0	52V	B/W	7	2	3
16VBYP4	4	VIDEO	1	8	11.0	52V	B/W	7	2	3
16VBZP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VCAP4	6	VIDEO	3	4	11	36V	B/W	2	5	6
16VCBP4	6	VIDEO	3	4	11	36V	B/W	2	5	6
16VCDP4	4	VIDEO	1	8	11	52V	B/W	7	2	3
16VCEP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VCFP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VCGP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VCHP4	4	VIDEO	1	8	4.2	52V	B/W	7	2	3
16VCJP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VCKP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VCLP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VCOMP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VCNP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VCQP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16VCRP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16VCSP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VCTP4	4	VIDEO	1	8	11	36V	B/W	7	2	3
16VCWP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VCXP4	4	VIDEO	1	8	11	52V	B/W	7	2	3
16VCYP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VCZP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VDAP4	6	VIDEO	3	4	11	52V	B/W	2	5	6
16VDBP22	2	VIDEO	1	14	6.3	68V	R	7	3	2
							G	11	13	12
							B	4	6	5
16VDCP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16VDEP4	4	VIDEO	1	8	11	68V	B/W	7	2	3
16VDGP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VDHP4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
16VDJP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
16VDKP4	6	VIDEO	3	4	11	36V	B/W	2	5	6
16VEMP22	2	VIDEO	1	14	6.3	36V	R	7	3	2
							G	11	13	12
							B	4	6	5
16VEP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
16VFYP4	4	VIDEO	1	8	4.2	36V	B/W	7	2	3
16VFZP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
16VGAP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
16VHDP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
16VP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
16WP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
16XP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
16YP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
16ZP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17AP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17ASP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
17ATP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17AVP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17BJP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17BKP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17BMP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17BNP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17BP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17BRP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
17BSP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
17BTP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17BUP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17BVP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
17BWP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
17BYP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
17BZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
17CAP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
17CBP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17CDP4	4	VIDEO	1	8	8.4	36V	B/W	7	2	3
17CEP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17CFP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17CGP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17CKP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
17CLP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17CMP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17CNP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17CP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17CRP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17CSP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
17CTP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
17CUP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17CVP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
17CWP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17XPP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17CYP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
17CZP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
17DAP4	4	VIDEO	1	8	2.68	36V	B/W	7	3	2
17DBP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17DCP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17DEP4	4	VIDEO	1	8	2.35	52V	B/W	7	3	2
17DHP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17DJP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17DKP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17DLP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17DMP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17DNP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
17DQP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
17DRP4	4	VIDEO	1	8	2.68	36V	B/W	7	3	2
17DSP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17DTP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17DVP4	4	VIDEO	1	8	2.4	52V	B/W	7	3	2
17DWP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17DXP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17DYP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
17DZP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17EAP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17EBP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17EFP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17EGP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
17EHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
17EJP22	8/UA	VIDEO	1	14	6.3	68V	R	4	2	3
							G	5	6	7
							B	13	12	11
17EKP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17ELP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17EMP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17ENP22	8/UA	VIDEO	1	14	6.3	68V	R	4	2	3
							G	5	6	7
							B	13	12	11
17EQP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
17ESP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
17ETP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
17EVP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17EWP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17EXP22	2	VIDEO	1	14	6.3	20V	R G B	7 11 4	3 13 6	2 12 5
17EZP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17FAP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17FBP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17FCP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
17FDP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17FEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17FGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17FHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17FJP22	2	VIDEO	1	14	6.3	20V	R G B	7 11 4	3 13 6	2 12 5
17FKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17FP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17FVP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17GP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17HP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17JP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17JP22	2	VIDEO	1	14	6.3	36V	R G B	7 11 4	3 13 6	2 12 5
17KP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17LP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17M118P7	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
17M152-M	2	VIDEO	1	14	6.3	52V	B/W	13	5	11
17M176P4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17QCP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
17QP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17RP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17SP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
17ST5490	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17ST6124	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
17TP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17UP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
17VAB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17VABP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17VACP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
17VADP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17VAEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17VAFP22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
17VAGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17VAHP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
17VAJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17VAKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17VALP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17VAMP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
17VANP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
17VAP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
17VAQP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
17VARP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17VASP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17VATP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
17VAUP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17VAWP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
17VAXP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
17VAYP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
17VAZP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
17VBAP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
17VBCP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
17VBDP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
17VBGP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	3 3 3	5 2 12
17VBHP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
17VBJP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
17VBLP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
17VBMP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
17VBNP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
17VBQP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	3 3 3	5 2 12
17VBRP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
17VBSP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	3 3 3	5 2 12
17VBTP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
17VBUP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
17VBWP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	3 3 3	5 2 12
17VBXP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	3 3 3	5 2 12
17VBYP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
17VBZP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
17VCDP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
17VDBP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
17VMBP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
17VP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17YP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
18AUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
18VABP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VACP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VADP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VAEP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VAFP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VAGP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VAHP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VAJP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VAKP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VALP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VAMP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VANP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
18VAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
18VAQP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VARP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VASP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VATP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VAUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
18VAWP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VAXP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VAYP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
18VAZP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
18VBAP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
18VBCP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VBDP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VBEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VBFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VBGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VBHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VBJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VBKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VBLP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
18VBMP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VBNP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VBQP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
18VBRP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VBSP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VBTP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VBUP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VBWP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VBXP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VDMP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
18VLTP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19ABP4	4	VIDEO	1	8	2.68	36V	B/W	7	3	2
19ACP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19ADP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19AEP4	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
19AFP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19AGP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19AHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19AJP4	UA	VIDEO	3	4	6.3	52V	B/W	2	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
19AKP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19ALP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19AMP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19ANP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19AP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
19AQP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19ARP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19ASP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19ATP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19AUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19AVP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19AWP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19AXP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19AYP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19AZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19BAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19BCP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19BDP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
19BEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19BFP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
19BGP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
19BHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19BJP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19BKP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
19BLP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19BMP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19BNP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19BP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
19BQP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19BRP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19BSP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19BTP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19BUP4	4	VIDEO	1	8	2.2	52V	B/W	7	2	3
19BVP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19BWP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19BXP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19BZP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
19CAB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19CAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19CD1000	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19CDP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
19CEB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19CEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19CFP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19CGP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
19CHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19CHP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19CJP4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
19CJP22	2	VIDEO	1	14	6.3	52V	R	2	3	4
							G	6	7	5
							B	11	12	13
19CKP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19CLP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
19CMP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19CQP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
19CRP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
19CSP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19CTP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19CUP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19CVP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19CWP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19CXP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
19CYP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19CZP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19DAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19DBP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
19DCB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19DCP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19DEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19DFP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19DHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19DJP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19DKP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19DLP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19DNP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19DP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
19DQP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19DRP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19DSP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19DTP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19DUP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19DVP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19DWP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19DYP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19DZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19EAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19EBP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19ECP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19EDP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19EFP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19EGP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19EHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19EJP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19EKP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
19ELP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19EMP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19ENP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19EP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
19EQP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19ERP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19ESP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19ETP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19EUP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19EVP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19EWP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19EWP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19EXP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19EYP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19EZP4	UA	VIDEO	3	4	6.3	52V	B/W	2	5	7
19FAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19FBP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19FCP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19FDP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19FEP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
19FGP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19FHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19FJP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19FKP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19FLP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19FMP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19FNP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19FP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
19FQP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19FRP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19FSP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19FTP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19FUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19FVP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19FWP4	4	VIDEO	1	8	4.2	36V	B/W	7	2	3
19FXP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19FYP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19FZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19GAP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19GBP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19GCP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19GDP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19GEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19GFP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19GHP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19GJP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19GKP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19GLP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19GMP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19GNP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19GP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
19GQP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19GRP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19GSP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19GTP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19GUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19GVP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19GWP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19GXP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19GYP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19GZP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19HAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19HBP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
19HCP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19HDP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19HFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19HGP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19HJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19HKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19HLP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19HMP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19HNP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19HQP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19HRP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19HSP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19HTP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19HVP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19HWP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19HXP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19HYP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JAP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JBP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JCP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JDP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
19JFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JLP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JMP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JNP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JOP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
19JQP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JRP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JSP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JTP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19JUP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19JVNP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
19JVP22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
19JWP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19JXP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
19JYP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19JZP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19KAP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19KBP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
19KCP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19KDP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19KEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19KFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19KGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19KHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19KJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19KLP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19KQP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
19RP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
19ST6118	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19TP22	UA	VIDEO	1	20	6.3	68V	R G B	2 7 19	3 8 18	4 9 17
19UP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VABP22	8/UA	VIDEO	1	14	6.3	68V	R G B	4 5 13	2 6 12	3 7 11
19VABQP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VACP22	8/UA	VIDEO	1	14	6.3	68V	R G B	4 5 13	2 6 12	3 7 11
19VADP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
19VAEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19VAEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VAFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VAGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VAHP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VAJP4	4	VIDEO	1	8	9.45	52V	B/W	7	2	3
19VAJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VAKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VALP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
19VAMP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VANP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VAQP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VAQP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VARP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19VASP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VATP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VAUP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VAWP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VAXP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VAYP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VAZP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VBAP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VBCP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VBDP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VBFP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VBGP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VBHP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VBHP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VBJP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VBKP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VBKP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VBLP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
19VBNP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19VBQP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VBRP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
19VBSP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VBUP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VBWP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VBXP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VBYP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19VBZP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VCAP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VCBP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VCDP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
19VCEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VCFP22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
19VCGP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VCHP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VCJP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VCKP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VCLP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VCM P4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VCNP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VCQP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VCRP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VCSP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VCTP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VCUP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19VCWP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VCXP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VCYP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VCZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19VCZP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
19VDAP4	4	VIDEO	1	8	4.2	52V	B/W	7	2	3
19VDBP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
19VDCP22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
19VDEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19VDFP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VDGP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VDHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19VDJP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VDJP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VDKP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VDLP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VDMP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VDNP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VDQP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VDRP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VDSP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VDTP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VDUP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VDWP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VDXP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VDYP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VDZP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VEAP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VEBP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VECP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
19VEDP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VEFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VEGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VEHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VEJP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
19VEKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VELP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VEMP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VENP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VEQP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
19VERP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VESP22	2	VIDEO	1	14	5.0	68V	R G B	2 6 11	3 7 12	4 5 13
19VETP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VEUP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VEWP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VEXP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VEZP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VFAP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VFBP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
19VFDP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
19VFDP4	4	VIDEO	1	8	11.0	52V	B/W	7	2	3
19VFEP4	4	VIDEO	1	8	11.0	52V	B/W	7	2	3
19VFGP4	4	VIDEO	1	8	11.0	52V	B/W	7	2	3
19VFHP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VFJP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
19VFKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN ^{SS}	K	G1	G2
19VFLP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VFM22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VFNP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VFQP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VFRP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VFS22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VFTP4	4	VIDEO	1	8	11	52V	B/W	7	2	3
19VFUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VFWP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VFXP22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
19VFYP4	4	VIDEO	1	8	4.2	52V	B/W	7	2	3
19VFZP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VGAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VGBP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VGCP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19VGDP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VGEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19VGFP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VGHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19VGJP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VGKP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VGLP22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
19VGMP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VGNP22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
19VGQP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VGRP22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
19VGSP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VGTP22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
19VGUP4	4	VIDEO	1	8	11	36V	B/W	7	2	3
19VGWP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VGXP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VGYP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
19VGZP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
19VHAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VHBP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VHCP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VHDP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
19VHEP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VHFP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
19VHGP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VHJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VHKP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
19VHLP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VHNPP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
19VHSP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
19VHTP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
19VHUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VHWP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
19VHXP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
19VHYPP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VHZP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
19VJAP4	4	VIDEO	1	8	11	52V	B/W	7	2	3
19VJBP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
19VJCP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
19VJDP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
19VJEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19VJFP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VJGP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19VJKP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
19VJLP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VJMP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VJNP22	7	VIDEO	7	8	6.3	52V	R	12	9	11
							G	10	9	11
							B	13	9	11
19VJP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VJQP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VJRP22	7	VIDEO	7	8	6.3	52V	R	12	9	11
							G	10	9	11
							B	13	9	11
19VJSP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VJTP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VJUP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VJVP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VJWP22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VJXP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VJYP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VKAP4	4	VIDEO	1	8	12.0	20V	B/W	7	2	3
19VKCP4	4	VIDEO	1	8	12.0	20V	B/W	7	2	3
19VKDP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VKEP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VKFP22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VKGP22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VKHP22	2	VIDEO	1	14	6.3	68V	R	4	3	5
							G	7	3	2
							B	11	3	12
19VKJP22	2	VIDEO	1	14	6.3	68V	R	4	3	5
							G	7	3	2
							B	11	3	12
19VKKP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VKLP22	2	VIDEO	1	14	6.3	68V	R	4	3	5
							G	7	3	2
							B	11	3	12

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
19VKMP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VKNP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VKP22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VKPU22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VKRP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VKSP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VKTP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VKUP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VKWP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VKXP22	7	VIDEO	7	8	6.3	68V	R	12	9	11
							G	10	9	11
							B	13	9	11
19VKYP22	3	VIDEO	5	6	6.3	68V	R	11	7	9
							G	8	7	9
							B	10	7	9
19VKZP22	2	VIDEO	1	14	6.3	68V	R	4	3	5
							G	7	3	2
							B	11	3	12
19VLAP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
19VLBP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VLC P22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VLDP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VLEP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VLFP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VLGP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
19VLHP22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
19VLJP22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	Ø	G1	G2
19VLKP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VLMP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VLNP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VLP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
19VLQP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
19VLRP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
19VLS P22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
19VLTP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VLUP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VLWP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VLXP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VLYP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
19VLZP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VMAP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VMBP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VMCP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VM DP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
19VMEP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
19VMFP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VMGP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VMHP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
19VMJP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VMKP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VMLP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VMNP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VMP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VMRP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VMSP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VMTP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
19VMYP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VMZP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VNAP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VNBP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VNCP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VNDP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VNEP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VNFP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
19VNGP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VNJP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
19VP22	8/UA	VIDEO	1	14	6.3	68V	R G B	4 5 13	2 6 12	3 7 11
19VRP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19VWGP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
19VXSP22	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
19WP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
19XBP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19XP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
19YP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
19ZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
20ABP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
20ACP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
20ADP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
20AEP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
20AFP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
20AGP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
20AHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
20AJP4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
20AKP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
20ALP4	4	VIDEO	1	8	9.45	52V	B/W	7	2	3
20BP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
20CP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
20DP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
20ETP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
20FP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
20GP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
20HP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
20JP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
20LP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
20MP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
20NP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
20PE13	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
20PE19	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
20RP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
20SP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
20ST6170	4	VIDEO	1	8	6.0	52V	B/W	7	2	3
20TP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
20UP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
20VABP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
20VACP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
20VADP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
20VAEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
20VAFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
20VAGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
20VAHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
20VAJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
20VAKP22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
20VALP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
20VAMP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
20VANP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
20VAQP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
20VARP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
20VASP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
20VATP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
20VAUP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
20VP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
20WP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
20XP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
20YP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
20ZP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21ACP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21AFP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21ALP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21AMP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21ANP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21AP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21AQP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21ASP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21ATP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21AUP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21AVP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21AWP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21AXP22	8/UA	VIDEO	1	14	6.3	68V	R G B	4 5 13	2 6 12	3 7 11
21AYP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21BAP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21BCP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21BDP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21BHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
21BMP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21BMP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
21BNP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21BP22	8/UA	VIDEO	1	14	6.3	68V	R G B	4 5 13	2 6 12	3 7 11
21BSP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21BTP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21BZP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21CBP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21CDP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21CEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21CGP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
21CHP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21CKP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21CLP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21CMP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21CQP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
21CSP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
21CUP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21CVP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21CWP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21CXP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21CYP22	8/UA	VIDEO	1	14	6.3	68V	R	4	2	3
							G	5	6	7
							B	13	12	11
21CZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21DAP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21DEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21DFP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21DHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21DJP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21DKP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21DLP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21DMP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21DNP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21DP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21DQP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21DRP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21DSP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21DUP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21DVP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21DWP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21EAP4	4	VIDEO	1	8	2.35	36V	B/W	7	3	2
21EDP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21ELP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
21EMP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21ENP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21EP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21EP22	8/UA	VIDEO	1	14	6.3	52V	R	4	2	3
							G	5	6	7
							B	13	12	11
21EQP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21ERP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21ESP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21ETP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21EUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21EVP4	4	VIDEO	1	8	2.68	36V	B/W	7	3	2
21EWP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21EXP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21EYP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21EZP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21FAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21FBP22	8/UA	VIDEO	1	14	6.3	68V	R	4	2	3
							G	5	6	7
							B	13	12	11
21FCP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21FDP4	4	VIDEO	1	8	6.3	36V	B/W	7	3	2
21FJP22	8/UA	VIDEO	1	14	6.3	68V	R	4	2	3
							G	5	6	7
							B	13	12	11
21FKP22	8/UA	VIDEO	1	14	6.3	68V	R	4	2	3
							G	5	6	7
							B	13	12	11
21FLP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21FMP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21FNP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
21FP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21FQP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21FTP4	4	VIDEO	1	8	6.3	20V	B/W	7	2	3
21FUP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21FVP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21FWP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21FXP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21FYP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21FZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21GAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21GBP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21GCP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21GEP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21GFP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21GHP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21GJP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21GKP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21GLP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21GMP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21GNP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21GRP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21GSP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21GTP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21GUP22	8/UA	VIDEO	1	14	6.3	68V	R	4	2	3
							G	5	6	7
							B	13	12	11
21GVP22	8/UA	VIDEO	1	14	6.3	68V	R	4	2	3
							G	5	6	7
							B	13	12	11
21GWP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21GXP22	8/UA	VIDEO	1	14	6.3	68V	R	4	2	3
							G	5	6	7
							B	13	12	11
21GYP22	8/UA	VIDEO	1	14	6.3	68V	R	4	2	3
							G	5	6	7
							B	13	12	11
21GZP22	8/UA	VIDEO	1	14	6.3	68V	R	4	2	3
							G	5	6	7
							B	13	12	11
21HAP22	8/UA	VIDEO	1	14	6.3	68V	R	4	2	3
							G	5	6	7
							B	13	12	11
21HBP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21JP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21KP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21M56P4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
21M101P4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
21M131P4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
21MP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21VABP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VACP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VADP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VAEP22	2	VIDEO	1	14	6.3	52V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VAFP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VAGP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
21VAJP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VAKP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VALP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VAMP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VAQP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VARP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VASP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21VATP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
21VAUP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VAWP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VAXP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VAYP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VAZP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VBAP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VBCP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VBDP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
21VBEP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
21VBFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
21VBGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
21VBHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
21VBJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
21VBKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
21VBLP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
21VBMP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	3 3 3	5 2 12
21VBNP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
21VBQP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
21VMWP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	3 3 3	5 2 12
21WP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21XP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21YP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
21YP22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
21ZP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
22ABP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22ACP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22ADP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22AEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22AFP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22AGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22AHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22AJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22ALP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22AMP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
22ANP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22AP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
22AQP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22ARP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22ASP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22ATP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22AVP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22AWP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22AXP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22AYP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22AYP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22AZP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22BCP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22BGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22BVCP4	4	VIDEO	1	8	11.1	36V	B/W	7	2	3
22CP7	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
22DP5	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
22EJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22EP22	8/UA	VIDEO	1	14	6.3	68V	R G B	4 5 13	2 6 12	3 7 11
22GP22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
22HP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
22JP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22KP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22LP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22M29P	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
22M30P	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
22M45P	2	VIDEO	1	14	6.3	68V	B/W	13	5	11

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
22QP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22RP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22SP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22TP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
22UP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22VABP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22VACP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22VADP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
22VAEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
22VAFP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
22VAGP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22VAGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22VAHP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22VAKP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22VAMP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22VANP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
22VARP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22VASP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22VATP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
22VAUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22VAWP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22VAXP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22VAYP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
22VAZP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22VBAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22VBOP4	4	VIDEO	1	8	11	52V	B/W	7	2	3
22VBDP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22VBEP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
22VP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22WP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22XP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22YP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
22ZP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23ABP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23ACP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23ADP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23AEP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23AFP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23AGP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23AHP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23AJP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23AKP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23ALP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23AMP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23ANP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23AQP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
23ARP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23ASP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23ATP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23AUP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23AVP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23AWP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23AXP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23AYP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23AZP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23BALP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23BAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23BCP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23BDP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
23BEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23BFP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23BGP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23BHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23BJP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23BKP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23BLP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23BMP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23BNP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23BP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23BP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23BQP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23BRP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23BSP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23BTP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23BUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23BVP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23BWP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23BXP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23BYP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23BZP4	UA	VIDEO	1	12	8.4	36V	B/W	11	2	10
23CAP4	UA	VIDEO	1	12	8.4	36V	B/W	11	2	10
23CBP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23CBP22	2	VIDEO	1	14	6.3	52V	R	2	3	4
							G	6	7	5
							B	11	12	13
23CDP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23CEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23CFP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23CGP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
23CHP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23CJP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23CKP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23CLP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23CMP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23CNP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23CP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23CQP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23CRP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23CSP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23CTP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23CUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23CVP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23CWP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23CXP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23CZP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23DAP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
23DBP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23DCP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23DEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23DFP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23DGP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23DHP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23DJP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23DKP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23DLP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23DNP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23DP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23DQP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23DRP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23DSP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23DTP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23DVP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23DWP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23DXP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23DYP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23DZP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23EAP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23EBP4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
23ECP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23EDP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23EFP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23EGP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23EHP4	UA	VIDEO	1	12	8.4	36V	B/W	11	2	10
23EJP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23EKP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23ELP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23EMP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23ENP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23EP4	UA	VIDEO	4	5	6.3	52V	B/W	3	6	7
23EP22	4	VIDEO	4	5	6.3	52V	B/W	3	6	7
23EQP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23ERP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23ESP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23ETP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23EWP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23EYP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23EZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23FAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23FBP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23FCP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23FDP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23FEP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
23FGP4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
23FHP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23FJP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23FKP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23FLP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23FMP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23FNP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23FP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23FQP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
23FRP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23FSP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23FTP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23FUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23FVP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23FWP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
23FXP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
23FYP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23FZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23GAP4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
23GBP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23GCP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23GDP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23GEP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
23GFP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23GHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23GJP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23GKP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23GMP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23GNP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
23GP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23GQP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23GRP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23GSP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23GTP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23GUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23GVP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23GWP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23GXP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23GYP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
23GZP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
23HAP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
23HBP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23HCP4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
23HDP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23HEP4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
23HFP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23HGP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23HJP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23HKP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23HLP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23HMP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23HNP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23HP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23HQP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23HRP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23HSP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23HTP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23HUP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23HVP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23HWP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23HXP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23HYP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23HZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23JAP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23JBP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
23JEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23JFP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23JGP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23JHP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23JLP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23JMP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23JNP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23JP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
23JQP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23JRP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23KP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23LP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23M31P	UA	SCOPE	1	12	6.3	68V	B/W	11	2	10
23M82P	2	VIDEO	1	14	6.3	52V	B/W	13	5	11
23M92P	2	VIDEO	1	14	6.3	52V	B/W	13	5	11

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
23M95P	UA	SCOPE	1	12	6.3	68V	B/W	11	2	10
23M101P	UA	SCOPE	1	12	6.3	68V	B/W	11	2	10
23MP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23NP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23QP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23RBP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23RP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23SP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23ST5488	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23TP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23UP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23VABP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VACP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VADP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VAEP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VAGP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VAHP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VAJP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VALP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VAMP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VANP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VAQP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VARP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VASP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VATP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VAUP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VAWP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VAXP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
23VAYP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
23VAZP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBAP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBCP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBDP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBKP22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
23VBLP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBMP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBNP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBRP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBSP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBTP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBUP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBWP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBXP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VBYP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VCAP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
23VCBP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VCDP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VCEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VCFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VCGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VCHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VCJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VCKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VCMP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VCNP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VCRP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
23VCZP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VFNP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
23VP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
23VRP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23VTP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23WP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
23XP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23YBFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
23YP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
23ZP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24ADP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24AEP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24AHP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
24AJP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24ALP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
24AMP4	UA	VIDEO	3	4	6.3	36V	B/W	2	5	7
24ANP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24AP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24AQP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
24ASP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
24ATP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24AUP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24AVP4	4	VIDEO	1	8	2.35	36V	B/W	7	3	2
24AWP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
24AXP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
24BAP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
24BCP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24BEP4	4	VIDEO	1	8	6.3	36V	B/W	7	3	2
24BP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
24CP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24DP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24QP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24TP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24VABP22	2	VIDEO	1	6	6.3	68V	R	13	12	11
							G	2	14	7
							B	4	3	5
24VAP22	2	VIDEO	1	6	6.3	68V	R	13	12	11
							G	2	14	7
							B	4	3	5
24VP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24WP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24XP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24YP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
24ZP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
25ABP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25ACP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25ADP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25AEP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25AFP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25AGP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25AHP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25AJP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25AKP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25ALP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25AMP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25ANP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25AP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25AQP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
25ARP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25ASP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25ATP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25AUP22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
25AVP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25AWP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25AXP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25AYP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25AZP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BAP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BCP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BDP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BLP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BMP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BNP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
25BRP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BSP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BTP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BVP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BWP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BXP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BYP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25BZP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25CAP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25CBP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25CP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25CZP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25DMP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25DP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
25EGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25EP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
25FP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25GP22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
25GYQP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
25HP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
25JP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
25KP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
25LP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
25LP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25MP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
25NP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
25RP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25SP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25TP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
25UP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VABP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VACP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VADP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VAEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VAFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VAGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VAHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VAJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VAKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VALP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VAMP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VAPB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VAQP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VARP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VASP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VATP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VAUP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VAWP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
25VAXP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VAYP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VAZP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBAP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBCP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBDP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBLP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBMP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBNP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBQP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBRP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBSP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBTP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBUP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBWP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBXP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
25VBYP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VBZP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCAP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCBP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCCP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCDP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCLP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCMP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCNP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCPZ22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCQP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCRP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCSP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCTP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCUP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCWP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
25VCXP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCYP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VCZP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDAP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDBP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDCP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDEP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDGP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
25VDHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDKP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDMP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDNP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDRP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDSP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDTP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDUP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDWP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDXP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VDYP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
25VDZP22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
25VEBP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VECP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VEDP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VEFP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VEGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VEHP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VEJP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VEKP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
25VEMP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VENP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VEOP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VEPP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VEQP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VERP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VESP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VETP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
25VEUP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
25VEWP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VEXP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VEYP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
25VEZP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VFAP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VFBP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
25VFCP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
25VFDP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
25VFEP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
25VFGP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VFHP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VFJP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
25VFKP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VFLP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VFMP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
25VFNP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
25VFQP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
25VFRP22	UA	VIDEO	4	5	6.3	52V	R G B	3 7 9	8 8 8	6 6 6
25VFSP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
25VFTP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
25VFXP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VFYP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VFZP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
25VGAP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
25VGBP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25VGDP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
25VGEP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
25VGHP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VGJP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VGKP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VGLP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
25VGMP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VGNP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
25VGQP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VGRP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
25VGSP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VGTP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
25VGUP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
25VGWP22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
25VGXP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
25VGYP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
25VGZP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
25VHAP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
25VHBP22	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
25VHCP22	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
25VHDP22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
25VHEP22	7	VIDEO	7	8	6.3	68V	R	12	9	11
							G	10	9	11
							B	13	9	11
25VHFP22	7	VIDEO	7	8	6.3	52V	R	12	9	11
							G	10	9	11
							B	13	9	11
25VHGP22	7	VIDEO	7	8	6.3	68V	R	12	9	11
							G	10	9	11
							B	13	9	11
25VHJP22	7	VIDEO	7	8	6.3	52V	R	12	9	11
							G	10	9	11
							B	13	9	11
25VHKP22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
25VHLP22	7	VIDEO	7	8	6.3	68V	R	12	9	11
							G	10	9	11
							B	13	9	11
25VHMP22	7	VIDEO	7	8	6.3	52V	R	12	9	11
							G	10	9	11
							B	13	9	11
25VHNP22	7	VIDEO	7	8	6.3	68V	R	12	9	11
							G	10	9	11
							B	13	9	11
25VHP22	7	VIDEO	7	8	6.3	52V	R	12	9	11
							G	10	9	11
							B	13	9	11
25VHQP22	7	VIDEO	7	8	6.3	68V	R	12	9	11
							G	10	9	11
							B	13	9	11
25VHRP22	7	VIDEO	7	8	6.3	68V	R	12	9	11
							G	10	9	11
							B	13	9	11
25VHSP22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
25VHTP22	7	VIDEO	7	8	6.3	68V	R	12	9	11
							G	10	9	11
							B	13	9	11
25VHUP22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
25VLHP22	7	VIDEO	7	8	6.3	68V	R	12	9	11
							G	10	9	11
							B	13	9	11
25VP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25VST6454A	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25VZFP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25WP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
25XP4	2	PROJ	1	14	6.3	68V	B/W	6	7	5
25XP22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
25YP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
25ZP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
26AP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
26DP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
26EP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
26FP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
26GP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
26HP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
26KP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
26VABP22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
27ABP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
27ACP4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
27ADP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
27AEP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
27AFP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
27AGP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
27AP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
27EP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
27GP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
27LP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
27MP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
27NP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
27RP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
27SP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
27UP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
27VP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
27WP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
27XP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
27YP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
27ZP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
28WB4	6	VIDEO	3	4	12	36V	B/W	2	5	6
29JAL70X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
29JAM11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
29JAM60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
30BP4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
32WB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
33ACD42X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
34KDN20	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
37GDA85X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
37GGC84X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
37JGA67X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
37JGG68X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
40CB4*	UA	VIDEO	4	5	2.8	36V	B/W	4	3	6
40HB4*	UA	VIDEO	4	5	2.8	36V	B/W	4	3	6
40JB4*	UA	VIDEO	4	5	2.8	36V	B/W	4	3	6
48JAH05X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
51GGB95X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
75AKB1	2	SCOPE	1	14	6.3	68V	B/W	3	2	7
75ANB11	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
85CB4	6	VIDEO	3	4	12	20V	B/W	2	5	6
85DB1	2	SCOPE	1	14	6.3	68V	B/W	3	2	7
85FB4	6	VIDEO	3	4	12	20V	B/W	2	5	6
85HB4*	UA	VIDEO	4	5	2.8	36V	B/W	4	3	6
85JB4	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
85MB4	6	VIDEO	3	4	6.0	36V	B/W	1	5	6
85VB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
85XB22	UA	VIDEO	5	6	6.0	68V	R G B	3 9 8	4 4 4	10 10 10
95L652-31	3	PROJ	6	7	6.3	52V	B/W	8	11	10
95L652-41	3	PROJ	6	7	6.3	52V	B/W	8	11	10
95L652-51	3	PROJ	6	7	6.3	52V	B/W	8	11	10
95WB31	2	SCOPE	1	14	6.3	52V	B/W	2	3	6
95XB31	2	SCOPE	1	14	6.3	68V	B/W	2	3	11
100FB4	6	VIDEO	3	4	6	68V	B/W	2	5	6
100GB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
110AB4	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
110CB4	6	VIDEO	3	4	12.0	36V	B/W	1	5	6
110EB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
120ANB4	6	VIDEO	3	4	6	20V	B/W	2	5	6
120AUB22	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
130AMB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
130ARB1	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
140AB4	6	VIDEO	3	4	12	52V	B/W	1	5	6
140ADB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
140AJB4	6	VIDEO	3	4	11.5	20V	B/W	2	5	6
140AKB4	6	VIDEO	3	4	11.4	36V	B/W	1	5	6
140ALB4	6	VIDEO	3	4	11.0	20V	B/W	2	5	6
140AN84	6	VIDEO	3	4	11.3	20V	B/W	2	5	6
140ANB4	6	VIDEO	3	4	11.5	20V	B/W	2	5	6
140ATB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
140AWB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6

* DIRECTLY HEATED CATHODE - SEE OPERATING NOTES

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
140AXB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
140BEB4	6	VIDEO	3	4	11.5	52V	B/W	1	5	6
140BHB31	UA	SCOPE	1	14	6.3	68V	B/W	7	3	9
140BJB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
140KKB4	6	VIDEO	3	4	11	52V	B/W	2	5	6
140BLB4	6	VIDEO	3	4	12	52V	B/W	2	5	6
140BRB4	6	VIDEO	3	4	11	52V	B/W	1	5	6
140BSB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
140BTB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
140BVB4	6	VIDEO	3	4	6.3	20V	B/W	2	5	6
140BXB4	6	VIDEO	3	4	5.6	20V	B/W	2	5	6
140BYB22	UA	VIDEO	5	6	6.0	68V	R	3	4	10
							G	9	4	10
							B	8	4	10
140CB4	6	VIDEO	3	4	12.0	20V	B/W	1	5	6
140CFB4	6	VIDEO	3	4	6.3	20V	B/W	2	5	6
140CGB31	2	SCOPE	1	14	6.3	68V	B/W	2	3	12
140CHB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
140CKB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
140CVB4	6	VIDEO	3	4	12.0	52V	B/W	1	5	6
140CXB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
140CYB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
140DB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
140DCB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
140DHB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
140DLB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
140DVB4	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
140DXB22	13/UA	VIDEO	4	5	6.0	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
140FB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
140GB4	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
140JB4	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
140MB4	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
140NB4	6	VIDEO	3	4	0.6	20V	B/W	2	5	6
140TB4	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
140VB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
140YB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
140ZB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
150AB4	4	VIDEO	1	8	12.0	20V	B/W	7	2	3
150ACB4	6	VIDEO	3	4	12.0	20V	B/W	1	5	6
150AFB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
150AHB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
150AUB22	2	VIDEO	1	14	6.3	36V	B/W	6	7	5
150AYB22	UA	VIDEO	4	5	3.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
150AZB22	UA	VIDEO	4	5	3.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
150BGB4	6	VIDEO	3	4	12.0	36V	B/W	1	5	6
150BMB22	UA	VIDEO	5	6	6.0	68V	R	3	4	10
							G	9	4	10
							B	8	4	10
150BXB22	13/UA	VIDEO	4	5	6.0	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
150CAB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
150CB4	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
150CHB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
150DRB31	UA	SCOPE	1	14	6.3	68V	B/W	3	2	5
150DSB31	2	SCOPE	1	14	6.3	68V	B/W	2	3	11
150DTB31	2	SCOPE	1	14	6.3	36V	B/W	2	3	11
150DUB31	UA	SCOPE	1	14	6.0	52V	B/W	7	2	5
150DVB31	2	SCOPE	1	14	6.0	52V	B/W	2	3	12
150DWB31	2	SCOPE	1	14	6.3	52V	B/W	2	3	12
150DXB31	2	SCOPE	1	14	6.3	52V	B/W	2	3	12
150DYB31	2	SCOPE	1	14	6.3	52V	B/W	2	3	12
150ECB39	2	SCOPE	1	14	6.0	68V	B/W	2	3	12
150EDB31	2	SCOPE	1	14	6.3	68V	B/W	2	3	11
150EFB31	2	SCOPE	1	14	6.3	68V	B/W	2	3	11
150HB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
150JB4	6	VIDEO	3	4	12.0	52V	B/W	1	5	6
150KB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
150MB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
150TB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
150YB4	6	VIDEO	3	4	12.0	36V	B/W	1	5	6
160CB22	UA	VIDEO	5	6	6.0	52V	R	3	4	10
							G	9	4	10
							B	8	4	10
160DB22	UA	VIDEO	5	6	6.3	68V	R	3	4	10
							G	9	4	10
							B	8	4	10
160EB22M	UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
160FB22	13/UA	VIDEO	4	5	6.0	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
170EB45	4	VIDEO	1	8	6.3	20V	B/W	7	2	3
170JB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
170KB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
170VB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
170WB22	3	PROJ	6	7	6.3	68V	B/W	8	11	10
170XB31	UA	SCOPE	1	14	6.0	68V	B/W	7	2	5
174BMP22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
180ACB22	3	PROJ	6	7	6.3	52V	B/W	8	5	10
180ADB22	UA	PROJ	6	7	6.3	52V	B/W	8	5	10
180AKB22	3	PROJ	6	7	6.3	52V	B/W	8	5	10
180AMB22	3	PROJ	6	7	6.3	52V	B/W	8	5	10
180ATB22	UA	PROJ	6	7	6.3	52V	B/W	8	5	10
180AVB22	3	VIDEO	6	7	6.3	52V	B/W	8	4	10
180AXB22	3	PROJ	6	7	6.3	52V	B/W	8	5	10
180BRB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
180BSB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
180BTB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
180BWB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
180XB31	UA	SCOPE	1	14	6.3	52V	B/W	2	3	5
180YB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
180ZB22	2	SCOPE	1	14	6.3	52V	B/W	2	3	12
180CAB39	2	SCOPE	1	14	6.3	52V	B/W	2	3	12
180CDB39	2	SCOPE	1	14	6.3	52V	B/W	2	3	12
180CGB22	3	PROJ	6	7	6.3	68V	B/W	8	11	10
180CHB22	3	PROJ	6	7	6.3	68V	B/W	8	11	10
180CJB22	3	PROJ	6	7	6.3	68V	B/W	8	11	10
180CKB22	3	PROJ	6	7	6.3	68V	B/W	8	11	10
180CLB22	3	PROJ	6	7	6.3	68V	B/W	8	11	10
180MB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
180RB22	3	PROJ	6	7	6.3	52V	B/W	8	5	10
180TB22	2	PROJ	1	14	6.3	52V	B/W	6	3	5
180WB22	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
180YB22	2	PROJ	1	14	6.3	52V	B/W	13	12	11
180YB43	3	PROJ	6	7	6.3	52V	B/W	8	11	10
190AB4	6	VIDEO	3	4	11.8	36V	B/W	2	5	6
190CB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
190DB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
190DWP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
190EB4	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
190FB4	6	VIDEO	3	4	11	52V	B/W	2	5	6
190GB4	6	VIDEO	3	4	11.4	36V	B/W	2	5	6
190HB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
190MB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
190TB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
190UB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
200AB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
200CB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
200DB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
200EB4	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
200FB4	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
200GB4	6	VIDEO	3	4	11.0	20V	B/W	2	5	6
200HB22	5/10	VIDEO	6	7	14.0	52V	R	8	9	10
							G	12	13	11
							B	3	4	5
200JB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
200KB22	5/10	VIDEO	6	7	12.0	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
200KBG22	2	VIDEO	1	14	6.3	52V	R	2	3	4
							G	6	7	5
							B	11	12	13
200KGB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
200LB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
200MB4	6	VIDEO	3	4	12.0	36V	B/W	1	5	6
200NB4	6	VIDEO	3	4	11.7	52V	B/W	2	5	6
200RB22	UA	VIDEO	5	6	6.3	68V	R	3	4	10
							G	9	4	10
							B	8	4	10
200SB4	6	VIDEO	3	4	11.5	52V	B/W	1	5	6
200TB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
200XB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
210AB4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
210AYB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
210CB4	4	VIDEO	1	8	5.0	36V	B/W	7	2	3
210EB4	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
210FB4	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
210HB4	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
210TB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
220CB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
220DB22	3	VIDEO	6	7	6.0	52V	R	8	9	10
							G	12	9	10
							B	4	9	10
220FB22	UA	VIDEO	4	5	6.3	68V	R	3	8	6
							G	7	8	6
							B	9	8	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
220HB22	5/10	VIDEO	6	7	12.0	52V	R	8	9	10
							G	12	9	10
							B	3	9	10
230AB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
230ACB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230ADB4	6	VIDEO	3	4	13.75	20V	B/W	1	5	6
230AEB4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
230AFB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230AGB4	6	VIDEO	3	4	9.0	20V	B/W	1	5	6
230AHB4	6	VIDEO	3	4	12.0	36V	B/W	1	5	6
230AJB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
230AKB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
230ALB4	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
230AMB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230ANB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
230ARB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
230ASB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230ATB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230AUB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
230AV134	UA	VIDEO	3	4	11.0	36V	B/W	2	5	7
230AVB4	6	VIDEO	3	4	12.0	52V	B/W	1	5	6
230AWB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230AWD4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230AXB4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
230AYB4	6	VIDEO	3	4	12	52V	B/W	2	5	6
230BAB39	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
230BDB4	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
230BEB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230BJB4	6	VIDEO	3	4	11.4	36V	B/W	2	5	6
230KKB4	6	VIDEO	3	4	11.1	36V	B/W	2	5	6
230LKB4	6	VIDEO	3	4	11.5	20V	B/W	1	5	6
230BRB4	6	VIDEO	3	4	11.5	20V	B/W	2	5	6
230BTB4	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
230BUB39	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
230BVB4	6	VIDEO	3	4	12	52V	B/W	2	5	6
230BWB22	UA	VIDEO	4	5	6.3	68V	R	3	8	6
							G	7	8	6
							B	9	8	6
230BXB4	6	VIDEO	3	4	11.8	36V	B/W	2	5	6
230BYB4	4	VIDEO	1	8	12.0	52V	R	6	7	5
							G	4	7	5
							B	3	7	5
230BZB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230CAB4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
230CB4	6	VIDEO	3	4	12.0	52V	B/W	1	5	6
230CEB4	6	VIDEO	3	4	11	52V	B/W	2	5	6
230CHB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230CJB4	4	VIDEO	1	8	6.3	20V	B/W	7	2	3
230CLB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230CNB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230CRB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230CXB4	6	VIDEO	3	4	11.0	68V	B/W	2	5	6
230CYB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
230DB4	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
230EB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230GB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
230HB4	6	VIDEO	3	4	12.0	52V	B/W	1	5	6
230JB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
230MB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
230NB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
230RB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230SB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230TB4	6	VIDEO	3	4	6.3	20V	B/W	2	5	6
230UB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
230VB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230WB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230XB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230YB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
230ZB4	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
230ZP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
240AB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
240ACB4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
240AGB4	6	VIDEO	3	4	11.0	68V	B/W	2	5	6
240AHB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
240ALB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
240ANB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
240ARB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
240ASB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
240ATB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
240AUB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
240CB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
240DB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
240EB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
240FB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
240GB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
240KB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
240LB4	6	VIDEO	3	4	4.2	52V	B/W	2	5	6
240MB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
240NB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
240RB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
240SB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
240TB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
240XB4	6	VIDEO	3	4	11.2	36V	B/W	2	5	6
240YB4	6	VIDEO	3	4	11.2	36V	B/W	2	5	6
250ACB22	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
250AFB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
250AGB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
250AKB22	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
250AMB22	UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
250ARB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
250CB4	4	VIDEO	1	8	5.0	52V	B/W	7	2	3
250JB11	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
250KB4	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
250MB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
250NB22	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
250RB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
250TB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
250XB22	5/10	VIDEO	6	7	12.0	68V	R	8	9	10
							G	12	13	11
							B	3	4	5

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
270AB4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
270AEB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
270AKB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
270ALB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
270EB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
270FB4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
270JB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
270KB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
270KCB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
270KCG22	2	VIDEO	1	14	6.3	52V	R	7	3	2
							G	11	13	12
							B	4	6	5
270LB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
270MB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
270NB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
270RB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
270SB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
270TB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
270UB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
270VB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
270WB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
280ACB4	6	VIDEO	3	4	11.5	36V	B/W	2	5	6
280CB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
280DB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
280EB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
280GB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
280JB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
280LB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
280MB4	6	VIDEO	3	4	5.0	52V	B/W	2	5	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
280NB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
280SB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
280TB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
280UB4	6	VIDEO	3	4	4.2	52V	B/W	2	5	6
280VB4	6	VIDEO	3	4	12.0	20V	B/W	1	5	6
280WB4	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
280XB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
280ZB4	6	VIDEO	3	4	12	52V	B/W	1	5	6
290DB4	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
290EB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
290FB22	5/10	VIDEO	6	7	6.3	68V	R	12	9	10
							G	8	9	10
							B	3	9	10
290GB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
290HB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
290KB22	UA	VIDEO	5	6	6.3	68V	R	3	4	10
							G	9	4	10
							B	8	4	10
310AB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310ADB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310AGB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310AHB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
310AJB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310AKB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310ALB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310AMB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
310ANB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310ARB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310ASB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
310ATB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310AUB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310AVB4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
310AWB4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
310AXB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
310AYB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
310AZB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310BAB4	6	VIDEO	3	4	4.2	52V	B/W	2	5	6
310BCB4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
310BDB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310BEB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
310BFB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310BHB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
310BKB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310BMB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
310BNB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310BTB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
310BWB4	6	VIDEO	3	4	4.2	52V	B/W	2	5	6
310BXB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310BYB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
310BZB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
310CB4	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
310CDB4	4	VIDEO	1	8	6.0	20V	B/W	7	2	3
310CFB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310CKB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310CLB4	4	VIDEO	1	8	6.0	20V	B/W	7	2	3
310CMB4	4	VIDEO	1	8	6.0	20V	B/W	7	2	3
310CNB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310CSB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
310CTB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310CUB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
310CVB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
310CWB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310CXB4	6	VIDEO	3	4	4.2	20V	B/W	2	5	6
310CYB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
310CZB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310DAB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310DCB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310DEB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
310DFB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310DGB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
310DGB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
310DHB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310DJB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
310DKB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310DLB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310DMB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
310DNB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310DRB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310DSB4	6	VIDEO	3	4	11.5	36V	B/W	2	5	6
310DTB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310DUB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310DVB4	6	VIDEO	3	4	4.2	52V	B/W	2	5	6
310DWB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310DXB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310DZB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310EAB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
310EB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
310ECB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
310EDB4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
310EFB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
310EHB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
310EJB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310ELB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
310EMB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
310ENB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
310ERB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
310ETB4	6	VIDEO	3	4	4.2	68V	B/W	2	5	6
310EUB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310EVB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
310EWB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
310EXB4	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
310EYB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310FAB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310FB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
310FCB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
310FDB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310FEB4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
310FGB22	2	VIDEO	1	14	6.3	52V	R	2	3	4
							G	6	7	5
							B	11	12	13
310FJB4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
310FKB4	6	VIDEO	3	4	6.3	68V	B/W	2	5	6
310FLB4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
310FMB4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
310FNB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310FRB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310FSB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310FTB4	4	VIDEO	1	8	4.2	52V	B/W	7	2	3
310FUB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
310FVB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310FXB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
310FYB4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
310FZB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310GAB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310GB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310GDB4	6	VIDEO	3	4	4.2	52V	B/W	2	5	6
310GJB4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
310GKB4	6	VIDEO	3	4	11	52V	B/W	2	5	6
310GNB4	6	VIDEO	3	4	13.8	52V	B/W	2	5	6
310GTB4	6	VIDEO	3	4	5.0	36V	B/W	2	5	6
310GUB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310GZB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
310HB4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
310HCB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310HDB4	6	VIDEO	3	4	11	52V	B/W	2	5	6
310HEB4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
310HFB4	6	VIDEO	3	4	11	52V	B/W	2	5	6
310HLB4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
310HPB4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
310HSB4	6	VIDEO	3	4	11.9	36V	B/W	2	5	6
310HTB4	6	VIDEO	3	4	11.1	36V	B/W	2	5	6
310HVB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
310HWB39	6	VIDEO	3	4	12	52V	B/W	2	5	6
310JB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
310JCB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
310JEB4	6	VIDEO	3	4	11.0	20V	B/W	2	5	6
310JHB4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
310JKB4	4	VIDEO	1	8	6.3	20V	B/W	7	2	3
310JLB4	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
310JLB31N	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
310JMB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
310JXB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310JYB4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
310JYB39	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
310JZB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310KAB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310KB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
310KDB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310KEB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310KFB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310KGB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310KGB31	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
310KHB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310KLB39	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310KMB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310KRB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310KVB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310LB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
310LFB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
310LMB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
310MB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310NB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
310TB4	6	VIDEO	3	4	3.15	52V	B/W	2	5	6
310WB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
310WB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
310XB4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
310YB4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
310ZB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
320ACB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
320ADB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
320AEB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
320AGB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
320AHB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
320AJB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
320AKB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
320AMB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
320ANB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
320ARB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
320ATB39	6	VIDEO	3	4	12	52V	B/W	2	5	6
320AUB39	6	VIDEO	3	4	12	52V	B/W	2	5	6
320AVB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
320AWB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
320AXB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
320AYB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
320BCB4	6	VIDEO	3	4	11	36V	B/W	2	5	6
320BG22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
320BJB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
320BMB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
320BRB4	6	VIDEO	3	4	11	52V	B/W	2	5	6
320BSB22	3	VIDEO	5	6	6.3	68V	R	11	7	9
							G	8	7	9
							B	10	7	9
320BTB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
320BUB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
320BWB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
320BXB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
320CB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
320CFB22	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
320CGB22	3	VIDEO	6	7	6.3	68V	R G B	8 12 4	9 9 9	10 10 10
320CSB22	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
320CXB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
320CYB22	3	VIDEO	6	7	6.0	52V	R G B	8 12 4	9 9 9	10 10 10
320DB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
320DCB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
320DEB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
320DFB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
320DGB22	3	VIDEO	9	10	6.0	52V	R G B	8 6 11	5 5 5	7 7 7
320DHB22	3	VIDEO	9	10	6.0	52V	R G B	8 6 11	5 5 5	7 7 7
320DJB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
320DKB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
320DMB22	3	VIDEO	9	10	6.0	52V	R G B	8 6 11	5 5 5	7 7 7
320DTB22	3	PROJ	6	7	6.3	52V	B/W	8	5	10
320EB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
320GB22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
320HB22	2	VIDEO	1	14	6.3	36V	R G B	2 6 11	3 7 12	4 5 13
320HIB22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
320JB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
320JIB22	2	VIDEO	1	14	6.3	52V	R G B	7 11 4	3 13 6	2 12 5
320KB22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
320LB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
320LEB22	3	VIDEO	9	10	6.0	52V	R G B	8 6 11	5 5 5	7 7 7
320MB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
320NB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
320RB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
320VB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
320WB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
330AB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
330AD22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
330ADB22	UA	VIDEO	8	9	6.3	68V	R G B	5 6 10	7 7 7	4 4 4
330CB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
330GB22	4	VIDEO	1	8	5.2	68V	R G B	6 4 3	7 7 7	5 5 5
330LB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
330P09002	3	VIDEO	5	6	6.3	36V	B/W	11	3	10
330P09004	3	VIDEO	5	6	6.3	36V	B/W	11	3	10
330P09006	3	VIDEO	5	6	6.3	36V	B/W	11	3	10
330P09007	3	VIDEO	5	6	6.3	36V	B/W	11	3	10
330VB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
330WB22	UA	VIDEO	8	9	6.3	68V	R G B	5 6 10	7 7 7	4 4 4
330YB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
340AB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
340ACB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340ADB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
340AFB4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
340AGB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
340AHB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340AJB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340AKB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
340ALB4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
340AMB4	6	VIDEO	3	4	12	52V	B/W	2	5	6
340ANB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
340ARB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
340ASB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
340ATB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
340AUB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
340AVB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340AXB4	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
340AYB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340AZB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340BAB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
340BCB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340BDB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340BFB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340BGB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340BHB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340BKB4	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
340BRB4	6	VIDEO	3	4	11	52V	B/W	2	5	6
340BSB4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
340BTB4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
340BZB4	6	VIDEO	3	4	11	52V	B/W	2	5	6
340CB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340CEB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
340CHB4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
340CKB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340CLB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340CRB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340CVB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340CWB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340CXB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340CXB31	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340DB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340EAB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
340EB4	6	VIDEO	3	4	4.2	36V	B/W	2	5	6
340FB4	6	VIDEO	3	4	4.2	52V	B/W	2	5	6
340GB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340HB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
340JB4	6	VIDEO	3	4	4.2	52V	B/W	2	5	6
340KB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
340LB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
340MB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
340NB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
340RB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340TB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
340UB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
340WB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
340XB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
340YB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
340ZB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
350AB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
350CB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
350DB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
360DB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
360EB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
360GB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
360HB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
360JB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
370AB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
370ACB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
370AEB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
370AFB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370AGB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370AKB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370ALB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370AMB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370ANB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
370ARB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
370AUB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
370AVB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
370AWB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370AXB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
370AYB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370BCB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370BDB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
370BEB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
370BFB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
370BGB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370BHB22	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370BKB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370BLB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370BNB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
370BRB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
370BRB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
370BUB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
370BVB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
370BVBK1U	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
370BYB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
370BZB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
370CAB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
370CB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
370CB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
370CFB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
370CGB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
370CHB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
370CJB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
370CKB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
370CNB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
370CRB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
370CSB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
370CUB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
370CVB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
370DEB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
370DFB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
370DGB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
370DHB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370DJB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370DKB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370DLB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
370DMB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
370DNB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370DRB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370DSB22	5/10	VIDEO	6	7	6.3	68V	R G B	12 10 8	4 4 4	5 5 5
370DTB22	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370DUB22	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370DVB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370DYB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370DZB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370EB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370ECB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370EFB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370EGB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
370EHB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370EJB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370EKB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
370ELB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
370EMB22	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
370ERB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370ESB22	3	VIDEO	5	6	6.3	68V	R G B	11 8 10	7 7 7	9 9 9
370ETB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
370FB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370FCB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370FGB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370FHB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370FJB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370FLB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	13 13 13	10 10 10
370FNB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370FTB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370FVB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370FXB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370FYB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370FZB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370GCB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
370GHB22	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
370GJB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370GKB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
370GUB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
370GYB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
370HAB22	UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
370HB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370HCB4	6	VIDEO	3	4	6.3	20V	B/W	1	5	6
370HEB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
370HFB22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
370HJB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370HKB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370HRB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
370HUB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370HVB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
370HYB22	3	VIDEO	6	7	6.0	68V	R G B	8 12 4	9 9 9	10 10 10
370HZB22	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
370IB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370JB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370JFB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370JKB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
370JMB22	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
370JNB22	UA	VIDEO	5	6	6.3	68V	R G B	3 9 8	4 4 4	10 10 10
370JRB22	UA	VIDEO	5	6	6.3	68V	R G B	3 9 8	4 4 4	10 10 10
370JSB22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
370JTB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
370JWB22	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
370JXB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
370JYB22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
370JZB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
370KAP22	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4
370KB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
370KHB22	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
370KLB22	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4
370KNB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
370KRB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
370KSB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
370KTB22	UA	VIDEO	6	7	6.0	52V	R	5	8	4
							G	9	8	4
							B	10	8	4
370KUB22	UA	VIDEO	6	7	6.3	52V	R	5	8	4
							G	9	8	4
							B	10	8	4
370KYB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
370LAB22	3	VIDEO	6	7	6.0	52V	R	8	9	10
							G	12	9	10
							B	4	9	10
370LB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
370LCB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
370LDB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
370LEB22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
370LFB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
370LGB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
370LHB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
370LJB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
370LMB22	3	VIDEO	6	7	6.3	52V	R	8	9	10
							G	12	9	10
							B	4	9	10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
370LVB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
370LWB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
370LXB22	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
370LYB39N	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
370MB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
370MCB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
370MDB22	3	VIDEO	9	10	6.0	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
370MEB22	3	VIDEO	9	10	6.0	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
370MKB22	3	VIDEO	6	7	6.0	52V	R	8	9	10
							G	12	9	10
							B	4	9	10
370MLB22	3	VIDEO	9	10	6.0	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
370MRB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
370MSB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
370MVB22	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4
370MWB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
370MXB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
370MYB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
370NAB22	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
370NB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
370NCB22	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
370NEB22	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
370NFB22	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
370NMB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
370NSB22	3	VIDEO	6	7	6.0	52V	R	8	9	10
							G	12	9	10
							B	4	9	10
370NVB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
370NWB22	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
370NXB22	3	VIDEO	9	10	6.0	52V	R G B	8 6 11	5 5 5	7 7 7
370RB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370RDB22	3	VIDEO	9	10	6.0	52V	R G B	8 6 11	5 5 5	7 7 7
370RJB22	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
370RKB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
370SB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370TB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370UB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370UNB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
370VAGB22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
370VAGP22	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
370VB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
370WB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
370ZB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
390DRB22	5/10	VIDEO	6	7	6.3	36V	R G B	8 12 3	9 9 9	10 10 10
400AB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
400ACB4	4	VIDEO	1	8	6.3	20V	B/W	7	2	3
400ACB22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
400ADB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400AEB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400AFB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
400AGB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
400AHB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400AJB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
400AKB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400ALB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400AMB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400ANB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400APB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
400ARB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400ASB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
400ATB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400AUB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400AWB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400AXB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400AYB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400AZB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400BAB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400BDB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
400BGB4	6	VIDEO	3	4	4.2	52V	B/W	2	5	6
400BHB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400BJB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
400BKB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
400BLB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
400BMB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
400BNB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
400BRB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
400BTB4	6	VIDEO	3	4	11.0	52V	B/W	1	5	6
400BUB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400BVB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400BWB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400BXB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400BYB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400BZB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400CAB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400CB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
400CDB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400CEB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400CFB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400CGB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400CHB4	6	VIDEO	3	4	4.2	52V	B/W	2	5	6
400CJB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
400CLB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
400CMB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
400CNB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
400CRB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
400CSB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400CTB4	6	VIDEO	3	4	12	36V	B/W	2	5	6
400CUB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
400CVB22	2	VIDEO	1	14	6.3	52V	R	2	3	4
							G	6	7	5
							B	11	12	13
400CZB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400DAB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
400DB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400DEB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400DFB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
400DGB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400DKB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
400DLB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400DMB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
400DNB22	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
400DWB22	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
400DYB22	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
400EB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
400EDB22	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
400EFB22	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
400EHB22	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
400FB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400GB4	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
400HB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400JB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
400KB22	8/UA	VIDEO	1	14	6.3	52V	R	4	2	3
							G	5	6	7
							B	13	12	11
400MB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
400NB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400SB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400TB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
400UB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400VB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400WB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400XB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
400YB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
400ZAB4	6	VIDEO	3	4	4.2	52V	B/W	2	5	6
400ZB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
420AB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420ACB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420ADB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
420AFB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420AGB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420AHB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420AJB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420AKB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
420ALB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
420AMB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420ARB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
420ASB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420ATB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420AUB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420AVB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420AWB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420AZB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420BAB22	5/10	VIDEO	6	7	6.3	68V	R	12	9	10
							G	8	9	10
							B	3	9	10
420BCB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420BEB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420BFB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
420BGB22	3	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420BHB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
420BJB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
420BKB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420BLB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420BMB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
420BNB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
420BRB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420BSB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420BTB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420BUB22	3	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420BVB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420BWB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420BZB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420CAB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420CB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420CDB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420CEB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420CFB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
420CGB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420CHB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
420CSB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
420CTB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
420CUB22	3	VIDEO	5	6	6.3	68V	R	11	7	9
							G	8	7	9
							B	10	7	9

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
420CYB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420CZB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
420DB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420DCB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420DEB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420DFB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420DGB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
420DKB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420DRB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
420DVB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
420DZB22	3	VIDEO	6	7	6.0	52V	R	8	9	10
							G	12	9	10
							B	4	9	10
420EB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420EFB22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
420ERB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
420ESB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420ETB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420EWB22	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4
420EZB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
420FAB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420FB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420FBF22	5/10	VIDEO	7	9	6.3	52V	R	11	12	13
							G	8	10	6
							B	5	4	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
420FJB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420FKB22	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4
420FRB22	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4
420FSB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
420FTB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
420FYB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420FZB22	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
420GAB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
420GB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420GFB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
420GMB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
420GNB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
420GTB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
420GUB22	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
420GWB22	3	VIDEO	9	10	6.0	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
420HB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420JB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420KB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420KLB22	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
420LB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420MB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
420NB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
420RB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
420RKB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
420SB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
420UB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
420VB22	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
420WB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
420XB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
420YB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
430CB22	8/UA	VIDEO	1	14	6.3	68V	R G B	4 5 13	2 6 12	3 7 11
430DB22	8/UA	VIDEO	1	14	6.3	68V	R G B	4 5 13	2 6 12	3 7 11
430EB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
430FB22	8/UA	VIDEO	1	14	6.3	68V	R G B	4 5 13	2 6 12	3 7 11
440AB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440ACB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
440ADB4	4	VIDEO	1	8	6.0	20V	B/W	7	2	3
440AEB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440AFB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
440AGB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440AHB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440AJB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
440AKB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
440ALB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
440AMB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
440ANB4	4	VIDEO	1	8	4.2	20V	B/W	7	2	3
440ASB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
440ATB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440AUB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440AVB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440AWB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440AXB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
440AYB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440AZB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
440BAB4	4	VIDEO	1	8	6.0	36V	B/W	7	2	3
440BCB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
440BDB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
440BEB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
440BEB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
440BFB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
440BFB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
440BGB4	4	VIDEO	1	8	8.4	36V	B/W	7	2	3
440BHB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
440BKB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
440BLB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
440BNB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
440BSB4	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
440BTB4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
440BVB4	6	VIDEO	3	4	11.2	52V	B/W	2	5	6
440BWB4	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
440BXB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440BYB4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
440CB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440CDB4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
440CHB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440CJB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
440CKB4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
440CLB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
440CRB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440CVB4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
440CWB4	6	VIDEO	3	4	11.0	68V	B/W	2	5	6
440DB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440DTB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
440EB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440FB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440GB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440HB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
440JB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440KB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440LB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440MB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440NB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440RB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440SB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440TB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
440UB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440VB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440WB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
440XB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
440YB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
440ZB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470AB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470ACB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
470ADB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470ADB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
470AEB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470AFB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470AHB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470AJB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470ALB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470ALB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
470AMB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470ANB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470ARB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470ASB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470ATB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470AVB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470AWB4	4	VIDEO	1	8	4.2	52V	B/W	7	2	3
470AXB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470AYB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470AYB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
470AZB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470BAB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470BEB22	2	VIDEO	1	14	6.3	68V	R	11	12	4
							G	6	7	4
							B	2	3	4
470BFB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
470BGB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
470BHB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
470BIB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
470BJB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
470KB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
470BLB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
470BMB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
470BNB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
470BRB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470BSB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470BTB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470BUB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470BVB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470BWB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470BXB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470BYB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470BZB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470CAB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470CB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470CBN22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
470CDB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470CEB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470CFB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470CJB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470CKB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470CLB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470CMB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470CNB22	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 10 9	10 10 10
470CSB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470CTB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470CVB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
470CWB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470CYB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470CZB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
470DCB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470DEB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470DFB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470DGB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470DHB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470DKB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470DLB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
470DMB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470DNB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
470DTB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470DUB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470DVB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470DXB22	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
470DYB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
470DZB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470EAB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
470EB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470ECB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
470EDB22	2	VIDEO	1	14	6.3	68V	R G B	8 4 12	7 3 11	5 2 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
470EFB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470EHB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470EJB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470ELB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
470EMB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470ERB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
470ESB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470ETB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
470EVB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470EXB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
470EYB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470EZB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470FAB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
470FCB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
470FDB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470FEB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470FGB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470FJB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470FLB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470FRB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470FTB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
470FWB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
470FXB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
470FZB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
470GAB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
470GB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470GCB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
470GEB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470GHB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470GLB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
470GMB22	5/10	VIDEO	6	7	5.8	68V	R G B	8 12 3	9 9 9	10 10 10
470GNB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470GRB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470GVB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470GYB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470GZB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
470HAB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
470HB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470HCB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
470HDB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
470HEB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
470HFB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470HJB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
470HLB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
470HMB22	3	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
470HRB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
470HSB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
470HTB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
470HUB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
470HWB22	3	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
470HXB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
470JAB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
470JB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
470JHB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
470JNB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
470JSB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
470JUB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
470JVB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
470JWB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
470JXB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
470JYB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
470JZB22	3	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
470KAB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
470KB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
470KCB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
470KDB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
470KGB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470KHB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
470KJB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470KLB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
470KRB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470KUB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
470KVB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470KXB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
470KZB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
470LAB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470LB4	4	VIDEO	1	8	6.0	52V	B/W	7	2	3
470LB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
470LGB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470LJB22	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
470LKB22	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
470LRB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
470LVB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470LWB22	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
470LXB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470LZB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
470MB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470MCB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470MDB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
470MFB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470MGB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
470MJB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470MSB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
470MTB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
470MWB22	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
470NAB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
470NB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
470NB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
470NKB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
470NTB22	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
470NVB22	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
470NWB22	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
470RB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470RCB22	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
470RDB22	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
470RGB22	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
470RMB22	2	VIDEO	1	14	6.3	68V	R G B	11 6 2	12 7 3	4 4 4
470RWB22	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
470SB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
470SWB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
470TB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470UB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470VB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470WB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
470XB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
470YB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
480AB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
490AB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490ACB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
490ACB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490ADB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490AEB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490AFB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490AGB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490AHB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490AJB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490AKB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490ALB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490AMB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490ANB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490ARB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490ASB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490ATB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490AUB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490AVB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490AWB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490AXB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
490AYB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
490AZB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BAB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BCB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BDB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BEB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BFB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BGB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BHB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BJB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BKB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BLB22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
490BMB22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
490BNB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BRB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BSB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BTB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BUB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BVB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BWB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BXB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490BYB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
490BZB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CAB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CDB22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
490CEB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CFB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CGH22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CHB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CJB22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
490CJH22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CKB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CLB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CMB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CNB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CRB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CSB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CTB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CUB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CVB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CWB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CXB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
490CYB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490CZB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490DAB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490DB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490DBF22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
490DCB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490DEB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490DFB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490DGB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490DHB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490DJB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490DKB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490DLB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490DMB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490DNB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490DVB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
490EB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490FB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490GB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490HB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490JB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490KB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
490LB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490MB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490NB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490RB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490SB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490TB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490UB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490VB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490WB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490XB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490YB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
490ZB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
500AB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500ACB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500ADB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500AEB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500AFB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500AGB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500AHB4	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
500AJB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500AKB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500ARB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500ASB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
500ATB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
500AUB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
500AVB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500AWB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500AXB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500AYB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500AZB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500BAB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
500BD84	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
500BEB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
500BFB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500BGB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
500KKB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500BLB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
500BMB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500BNB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500BOB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
500BRB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500BTB4	4	VIDEO	1	8	12.0	68V	B/W	7	2	3
500BUB4	4	VIDEO	1	8	11.0	52V	B/W	7	2	3
500BVB4	4	VIDEO	1	8	11.7	36V	B/W	7	2	3
500BWB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
500XB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500YB4	4	VIDEO	1	8	11.7	36V	B/W	7	2	3
500ZB4	4	VIDEO	1	8	6.3	20V	B/W	7	2	3
500CAB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500CB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500CDB4	4	VIDEO	1	8	11	52V	B/W	7	2	3
500CEB4	4	VIDEO	1	8	11	52V	B/W	7	2	3
500DB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500EB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500ELB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
500FB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500GB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500HB4	4	VIDEO	1	8	4.2	52V	B/W	7	2	3
500JB4	4	VIDEO	1	8	4.2	36V	B/W	7	2	3
500KB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
500LB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
500MB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500NB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500RB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500SB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
500TB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500UB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500VB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
500WB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500XB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
500YB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
500ZB4	4	VIDEO	1	8	6.0	36V	B/W	7	2	3
510AB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510ABAB22	3	VIDEO	9	10	6.0	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
510ABCB22	5/10	VIDEO	6	7	6.3	52V	R	8	9	10
							G	12	9	10
							B	3	9	10
510ABEB22	3	VIDEO	6	7	6.0	52V	R	8	9	10
							G	12	9	10
							B	4	9	10
510ABFB22	3	VIDEO	6	7	6.0	52V	R	8	9	10
							G	12	9	10
							B	4	9	10
510ABGB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
510ABHB22	3	VIDEO	9	10	6.0	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
510ABMB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	11	5	7
							B	6	5	7
510ABNB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
510ABVB22	3	VIDEO	6	7	6.3	68V	R G B	8 12 4	9 9 9	10 10 10
510ABWB22	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
510ABYB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
510ACB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510ACDB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
510ACGB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
510ACLB22	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
510ACTB4	2	VIDEO	1	14	6.3	68V	B/W	6	3	5
510ACXB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
510ACYB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
510ADB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510ADFB22	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
510ADWB22	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
510ADX22	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
510AEB22	3	VIDEO	9	10	6.0	68V	R G B	8 6 11	5 5 5	7 7 7
510AEB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510AECB22	3	VIDEO	9	10	6.0	52V	R G B	8 6 11	5 5 5	7 7 7
510AFB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510AGB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510AHB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510AJB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510AKB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
510ALB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510AMB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510ANB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510ARB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510ASB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510ATB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510AUB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510AVB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510AWB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510AXB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510AYB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510AZB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510BAB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510BCB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510BDB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510BEB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510BFB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510GBB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510HBB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510BJB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510BLB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
510BMB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
510BNB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510BRB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510BSB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510BTB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510BUB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510BVB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510BWB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510BXB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510BYB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510BZB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510CAB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510CB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510CDB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510CEB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510CFB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
510CGB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510CHB22	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
510CJB22	3	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
510CKB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510CLB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510CMB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
510CNB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510CRB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510CSB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510CTB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510CUB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510CVB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510CWB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510CXB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510CYB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510CZB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510DAB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510DB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510DCB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510DEB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510DFB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510DJB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510DKB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510DLB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510DMB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510DNB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510DRB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
510DSB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510DTB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
510DUB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510DVB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510DXB22	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
510DZB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510EAB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510EB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510ECB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510EDB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510EFB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
510ELB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510EMB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
510ENB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510ERB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510ESB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510ETB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510EUB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
510EVB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
510EWB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
510EXB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
510EYB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510EZB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510FAB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510FB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510FCB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
510FDB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
510FEB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510FIB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510FLB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510FMB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
510FNB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
510FSB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510FTB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
510FUB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510FV22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510FVB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510FWB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510FXB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510FYB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510FZB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
510GB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
510GBJ22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510GCB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510GEB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
510GHB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
510GJB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510GKB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
510GLB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510GLG22	2	VIDEO	1	14	6.3	68V	R	2	7	12
							G	6	7	12
							B	11	7	12
510GMB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510GNB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510GSB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510GTB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510GWB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510GXB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510GYB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
510GZB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
510HAB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
510HB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510HCB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510HFB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510HGB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510HJB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
510HKB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510HMB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510HNB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510HRB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510HSB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
510HWB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510HYB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510HZB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510JB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510JCB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510JDB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
510JEB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
510JFB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
510JGB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
510JHB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
510JKB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
510JLB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
510JSB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
510JUB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510JVB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510JWB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
510JYB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510JZB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510KAB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510KB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510KCB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
510KDB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510KEB22	5/10	VIDEO	6	7	5.8	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510KGB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510KHB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510KJB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510KLB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
510KTB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510KWB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510KYB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
510KZB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
510LAB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
510LB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510LCB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510LDB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
510LEB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
510LFB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
510LGB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510LHB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510LKB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
510LNB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510LRB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510LSB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
510LTB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510LUB22	3	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
510LXB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510LYB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
510LZB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
510MAB22	3	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510MB22	2	VIDEO	1	14	6.3	68V	R	4	6	5
							G	7	3	2
							B	11	13	12
510MCB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510MDB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510MEB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510MH822	3	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
510MJB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
510MKB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510MRB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510MSB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
510MTB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510MVB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
510MWB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510MZB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510NAB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510NB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510NDB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510NEB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510NFB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510NHB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510NJB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510NLB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510NRB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510NSB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510NUB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510NVB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510NWB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
510NXB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
510NYB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
510NZB22	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
510RB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
510RCB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510RDB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510REB22	5/10	VIDEO	6	7	6.3	68V	R	12	4	5
							G	10	4	5
							B	8	4	5
510RJB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
510RKB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510RMB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510RSB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510RUB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510RVB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510RWB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510RZB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510SB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510SCB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510SFB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
510SGB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510SJB22	3	VIDEO	5	6	6.3	68V	R	11	7	9
							G	8	7	9
							B	10	7	9
510SKB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
510SLB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
510SWB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510SYB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
510TB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510TDB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
510XAB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
510XB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510XDB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
510XJB22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
510XNB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510XRB22	3	VIDEO	6	7	6.0	52V	R	8	9	10
							G	12	9	10
							B	4	9	10
510XSB22	3	VIDEO	6	7	6.0	52V	R	8	9	10
							G	12	9	10
							B	4	9	10
510XTB22	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
510XUB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
510XVB22	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
510YB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510YEB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
510YSB22	3	VIDEO	9	10	6.0	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
510YTB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
510YUB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
510YWB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
510YXB22	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
510ZB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
510ZDB22	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4
510ZEB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
510ZTB22	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
520AB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
520CB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
520DB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
520EB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
520EB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
520FB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
520GB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
520HB22	5/10	VIDEO	6	7	6.3	68V	R	12	4	5
							G	10	4	5
							B	8	4	5
520KB22	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
520KTB22	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
520NB22	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
520RB22	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
520SB22	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
520UB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
520XB22	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
530WB4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
550AB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
550CB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
550EB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
550FB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
550GB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
560AB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
560ACB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
560ADB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
560AEB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
560AFB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
560AGB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
560AJB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
560AKB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
560ALB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
560AMB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
560ANB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
560ARB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
560ASB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
560ATB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
560AUB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
560AVB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
560AWB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
560AXB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
560AYB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
560BAB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
560BCB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
560BEB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
560BFB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
560BGB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
560BHB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
560BJB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
560BKB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
560BLB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
560BMB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
560BRB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
560BSB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
560BTB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
560BUB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
560BVB22	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
560BWB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
560BX22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
560BXB22	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
560BYB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
560BZB22	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
560CAB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
560CB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
560CDB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
560CFB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
560CGB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
560CHB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
560CLB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
560CMB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
560CNB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
560CSB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
560CWB22	5/10	VIDEO	6	7	6.3	52V	R	8	9	10
							G	12	9	10
							B	3	9	10
560CXB22	2	VIDEO	1	6	6.3	68V	R	13	12	11
							G	2	14	7
							B	4	3	5
560CZB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
560DAB22	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
560DB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
560DCB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
560DEB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
560DHB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
560DJB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
560DIB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
560DSB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
560DUB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
560DVB22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
560DYB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
560EB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
560EGB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
560EMB22	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4
560ETB22	9	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
560EZB22	2	VIDEO	1	6	6.3	68V	R	13	12	11
							G	2	14	7
							B	4	3	5
560FRB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
560FUB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
560FWB22	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
560GDB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
560GEB22	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
560HB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
560JB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
560KB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
560LB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
560MB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
560NB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
560RB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
560SB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
560TB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
560UB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
560VB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
560XB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
560XCB22	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
560ZB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
570AB22	5/10	VIDEO	6	7	6.3	68V	R G B	12 10 8	4 4 4	5 5 5
570DB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
570EB22	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
570FYB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
570JB22	2	VIDEO	1	14	6.3	52V	R	7	3	2
							G	11	13	12
							B	4	6	5
570JB22	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
590AB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590CB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
590DB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
590EB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590FB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590GB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590HB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590JB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590KB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590LB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590MB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590NB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590RB4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
590SB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590TB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590UB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590VB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590WB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590XB4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
590YB4	4	VIDEO	1	8	4.2	52V	B/W	7	2	3
590ZB4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
660AB22	2	VIDEO	1	6	6.3	68V	R	13	12	11
							G	2	14	7
							B	4	3	5
660CB22	2	VIDEO	1	6	6.3	68V	R	13	12	11
							G	2	14	7
							B	4	3	5
670AB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	13	11
							B	3	4	5
670ACB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
670ADB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
670AEB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
670AFB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
670AGB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
670AKB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
670ALB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
670AMB22	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
670ANB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670ARB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670ASB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670ATB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
670AVB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
670AWB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
670AXB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
670AYB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
670AZB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
670BCB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
670BDB22	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
670BEB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670BFB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670BGB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670BJB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670BKB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
670BLB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
670BMB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
670BNB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
670BRB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
670BSB22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
670BTB22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
670BXB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670BYB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
670CAB22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
670CB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670CDB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
670CNB22	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
670CRB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
670CTB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
670CUB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
670CWB22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
670CZB22	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
670DB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670DEB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
670DHB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
670DNB22	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
670DRB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	12 12 12	7 7 7
670DXB22	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
670DZB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
670EAB22	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
670EB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670EKB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
670EKB22	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
670EMB22	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
670ERB22	3	VIDEO	7	10	6.3	68V	R G B	11 8 5	9 9 9	12 12 12
670ETB22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
670EUB22	3	VIDEO	7	10	6.3	68V	R G B	11 8 5	9 9 9	12 12 12
670EYB22	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
670FB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670GB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670HB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670JB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670KB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670LB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670MB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670NB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670RB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670SB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670TB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670UB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670VB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670WB22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
670XB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
670YB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
670ZB22	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
680AB22	1	VIDEO	5	6	6.3	68V	R G B	11 9 7	3 3 3	4 4 4
680CB22	UA	VIDEO	6	7	6.3	68V	R G B	12 10 8	4 4 4	5 5 5
680DB22	UA	VIDEO	6	7	6.3	68V	R G B	12 10 8	4 4 4	5 5 5
680EB22	UA	VIDEO	6	7	6.3	68V	R G B	12 10 8	4 4 4	5 5 5
680FB22	UA	VIDEO	6	7	6.3	68V	R G B	12 10 8	4 4 4	5 5 5
710AB22	1	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	12 12 12
710CB39	3	VIDEO	6	7	6.3	68V	B/W	8	4	10
710DB39	3	VIDEO	4	11	6.3	20V	B/W	8	12	10
750A3700	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
0809P4	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
1215P4	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
1409P31	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
1819P22	8/UA	VIDEO	1	14	6.3	68V	R G B	4 5 13	2 6 12	3 7 11
1828P22	8/UA	VIDEO	1	14	6.3	68V	R G B	4 5 13	2 6 12	3 7 11
1829P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1830P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1833P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1834P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1835P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1836P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1837P22	8/UA	VIDEO	1	14	6.3	68V	R G B	4 5 13	2 6 12	3 7 11
1838P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1839P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
1841P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1842P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1843P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1845P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1859P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1877P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1879P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1891P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1895P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1906P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
1909P22	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
1913P22	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
2701B22	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
3701B22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
3702B22	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
3707B22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
3708B22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
3709B22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
3720B22	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
3732B22	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
3901B22	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
4075	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4076	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
4097	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4102	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4201B22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
4387	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4388	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4389	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4532	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
4543	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
4702B22	5/10	VIDEO	6	7	6.3	52V	R	8	9	10
							G	12	9	10
							B	3	9	10
4804	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
4809	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
4810	UA	VIDEO	1	8	6.3	36V	B/W	7	2	6
4833	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4848	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4890	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
4904	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4911	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
5100XB22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
5102DB22	UA	VIDEO	6	7	6.3	52V	R	5	8	4
							G	9	8	4
							B	10	8	4
5106B22	5/10	VIDEO	6	7	6.3	52V	R	8	9	10
							G	12	9	10
							B	3	9	10
5108B22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
5109B22	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
5110B22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
5120B22	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
7038	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
7262	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
7697	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
7735	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8134	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8480	UA	VIDEO	1	8	6.3	36V	B/W	7	2	6
8507	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8541	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8572	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8625	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8628	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8638	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8823	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
8844	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
9388P4	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
9901	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
9915	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
13271P4	UA	VIDEO	1	14	6.3	52V	B/W	13	5	8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
14171P4	2	VIDEO	1	14	6.3	36V	B/W	13	5	11
17127P4	2	VIDEO	1	14	6.3	36V	B/W	13	5	11
17269P4	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
17-269P4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
19301P22	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
55261	UA	SCOPE	1	14	6.3	52V	B/W	7	3	9
537-554X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A4AAB10X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A04JGM09X	6	VIDEO	4	5	6.3	36V	R	7	5	2
							G	6	5	2
							B	3	5	2
A05KBZ00WB*	UA	VIDEO	3	7	0.6	68V	B/W	3	2	1
A6S-11W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A07JVG07WW*	UA	VIDEO	4	5	2.8	68V	B/W	4	3	6
A08JQ01X	UA	VIDEO	3	4	6.0	68V	B/W	2	1	6
A09JEV09X	UA	VIDEO	5	6	6.0	68V	R	3	4	10
							G	9	4	10
							B	8	4	10
A10JVH47WB*	UA	VIDEO	4	5	0.5	68V	B/W	4	3	6
A10KCB00WB*	UA	VIDEO	3	7	0.6	68V	B/W	3	2	1
A10V1	UA	SCOPE	1	14	6.3	68V	B/W	7	3	9
A11JPF5WW	6	VIDEO	3	4	6.0	52V	B/W	2	5	6
A11KAG10X*	UA	VIDEO	3	7	0.62	68V	B/W	3	2	1
A13ABQ0BM	3	VIDEO	7	9	6.3	20V	B/W	12	10	4
A13ABQ0GJ	3	VIDEO	7	9	6.3	20V	B/W	12	10	4
A13ABQ0RF	3	VIDEO	7	9	6.3	20V	B/W	12	10	4
A13ABQORF	3	VIDEO	7	9	6.3	52V	B/W	12	10	4
A13ABR0BM	3	VIDEO	7	9	6.3	20V	B/W	12	10	4
A13ABR0RF	3	VIDEO	7	9	6.3	20V	B/W	12	10	4
A13JCU00X	UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A13JLY00X	UA	VIDEO	4	5	3.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A13JUZ07	6	VIDEO	3	4	6.0	52V	B/W	2	5	6
A13JVA00X	UA	VIDEO	4	5	4.5	52V	R	7	3	6
							G	9	3	6
							B	10	3	6
A13JZV00X	UA	VIDEO	4	5	4.5	52V	R	7	3	6
							G	9	3	6
							B	10	3	6
A14JJD30X	UA	VIDEO	5	6	6.0	68V	R	3	4	10
							G	9	4	10
							B	8	4	10
A14JJD60	3	VIDEO	9	10	6.0	68V	R	8	12	7
							G	6	12	7
							B	11	12	7
A14JWE05WW	6	VIDEO	3	4	12.0	20V	B/W	1	5	6
A14JZC30X	UA	VIDEO	5	6	6.0	68V	R	3	4	10
							G	9	4	10
							B	8	4	10
A18JHC30X	13/UA	VIDEO	4	5	6.0	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A18JHC90X	13/UA	VIDEO	4	5	6.0	68V	R	7	6	8
							G	9	6	8
							B	3	6	8

* DIRECTLY HEATED CATHODE - SEE OPERATING NOTES

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A18JPL31X	13/UA	VIDEO	4	5	6.0	68V	R G B	7 9 3	6 6 6	8 8 8
A20JKU00X	UA	VIDEO	8	9	4.5	68V	R G B	5 6 7	7 7 7	4 4 4
A20JKU10X	UA	VIDEO	8	9	4.5	68V	R G B	10 5 6	7 7 7	4 4 4
A22JCM00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A22JCM10X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A22JCN00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A22JCW10X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A22JFR00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A22JFR60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A22JFR80X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A22JMB00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A22JWG30X	13/UA	VIDEO	4	5	6.0	68V	R G B	7 9 3	6 6 6	8 8 8
A22JWG34X	13/UA	VIDEO	4	5	6.0	68V	R G B	7 9 3	6 6 6	8 8 8
A23JAN40X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A23JAN56X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A23JAN96X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A23JAN99X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A23JAN99X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A23JSL21X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A23JSL24X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A23JTL90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A23JUM60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A23KCJ04X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A23KDK02X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A23KKB50X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A23KKB51X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A24JHS10X	5/10	VIDEO	6	7	6.3	68V	R G B	12 10 8	4 4 4	5 5 5
A26JAS01X	UA	VIDEO	5	6	6.3	68V	R G B	3 9 8	4 4 4	10 10 10
A26JAS30X	UA	VIDEO	5	6	6.3	68V	R G B	3 9 8	4 4 4	10 10 10
A26JAS31X	UA	VIDEO	5	6	6.3	68V	R G B	3 9 8	4 4 4	10 10 10
A26JGZ01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A26JGZ03X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A26JGZ31X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A26JGZ91X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A26JGZ93X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A26JGZ95X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A26JJE00X	UA	VIDEO	5	6	6.3	68V	R G B	3 9 8	4 4 4	10 10 10
A27KGC10X	UA	VIDEO	4	5	6.3	68V	R G B	7 9 10	3 3 3	6 6 6
A29AAH0WW	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
A29JAC00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A29JAD00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A29JBP00X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A29JJN60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A33AAB10X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33AAB15X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33AAB16X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33AAB20X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A33AAB30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33AAB35X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33AAB36X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33AAF00X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A33AAL01X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A33AAL02X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A33AAL03X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A33AAS40X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A33AAS50X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A33ABD00X	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
A33ABD11X	2	VIDEO	1	14	6.3	68V	R G B	4 7 11	6 3 13	5 2 12
A33ABE60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ABE61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ABE62X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ABE67X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ABL20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ABL30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ABM26X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A33ABW60X	5/10	VIDEO	6	7	6.3	52V	R G B	8 12 3	9 9 9	10 10 10
A33ABW61X	5/10	VIDEO	6	7	6.3	52V	R G B	8 12 3	9 9 9	10 10 10
A33ABW62X	5/10	VIDEO	6	7	6.3	52V	R G B	8 12 3	9 9 9	10 10 10
A33ACA00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ACB00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ACB01X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A33ACB02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ACB51X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ACD02X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A33ACD25X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A33ACD30X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A33ACF60X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A33ACS00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A33ACS01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A33ADU00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ADU65X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ADU66X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ADU75X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ADU76X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ADU92X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ADU93X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A33ADU95X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33ADU96X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33JKL00X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33JKL60X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A33JKR00X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34EAC00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34EAC50X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34EAE00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34EAE01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34EAJ00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34EAP00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JAE00X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A34JAE10X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JAH00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34JAJ01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JAN00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JAN30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JAN31X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JAN32X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JAN40X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JAN42X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A34JAN51X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JAN80X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JAN90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JAN91	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JAN92X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JAN99X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JAP00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JBB00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JBB02X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JBB60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JBH00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JBH30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JBH53X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JBH80X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JBH90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JBH99X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JBQ00X	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A34JBU00X	5/10	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	12 12 12
A34JBU10X	5/10	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	12 12 12
A34JCD00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JCD01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A34JCD04X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JCD05X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JCD24X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JCD30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JCD31X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A34JCD90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JCD91X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JCS05X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34JDD30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JDZ00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JEB60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JER00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34JFN02X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JFO31X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JFQ40X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JFQ41X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JFQ42X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JFQ90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JFY00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JFY50X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JFY80X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A34JFY83X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JFY90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JGZ32X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JHP90X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A34JHS10X	5/10	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	12 12 12
A34JHS12X	5/10	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	12 12 12
A34JHS15X	5/10	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	12 12 12
A34JJB92X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A34JJH00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34JJH60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34JKG00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JKG60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JKH00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JKH30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JLL20X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A34JLL40X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A34JLL53X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A34JLL70X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JLL73X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JLL90X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A34JLL93X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A34JLN60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A34JMW20X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A34JMW70X	5/10	VIDEO	6	7	6.3	52V	R G B	8 12 3	9 9 9	10 10 10
A34JNN60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34JPU60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JQQ00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JQR00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34JRD00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JRD20X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JRD30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JRD90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JRH01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JRH61	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JRH61X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JRJ60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JRP00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34JRS01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JRS12X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JRY00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JRY01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JRY04X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JRY21X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

**The socket adaptors
are stored inside
the top cover.**

**The socket adaptors
are stored inside
the top cover.**

SPECIAL NOTES

Sockets 5 and 10 (5/10)

CRT bases using sockets 5 and 10 may be interchanged by the tube manufacturer. If the socket listed doesn't mechanically fit the tube, try the alternate socket. These sockets are electrically identical so the set-up remains the same.

Sockets 8/UA and 13/UA

Several tubes are listed as using sockets "8/UA" or "13/UA". Use the socket listed, 8 or 13, if you have it. If you don't have the socket, use the Universal Adapter.

Tubes With "TC" Endings

This book does not list tubes with endings of TC01, TC02, etc. "TC" endings refer only to the bonded yoke. These tubes are identical to ones with a "P22" or "B22" ending.

Tubes beginning with "MV"

When testing a tube beginning with "MV", the listing will be found by dropping the MV and looking up the remainder of the tube number. For example, MVA63AAMOOX will be found listed as A63AAMOOX.

Using The Universal Adapter (UA)

The set-up numbers in this book refer to the pin numbers of the CRT gun elements. Connect the UA leads to the CRT pins by using the set-up information listed in this book. However, the CR70 switches must be set up as follows:

CR70 Switch	UA Switch Setting
F1	1
F2	2
K	3
G1	4
G2	5

The CR70 switches must be set at these positions when using the UA on any tube.

SPECIAL NOTES

Sockets 5 and 10 (5/10)

CRT bases using sockets 5 and 10 may be interchanged by the tube manufacturer. If the socket listed doesn't mechanically fit the tube, try the alternate socket. These sockets are electrically identical so the set-up remains the same.

Sockets 8/UA and 13/UA

Several tubes are listed as using sockets "8/UA" or "13/UA". Use the socket listed, 8 or 13, if you have it. If you don't have the socket, use the Universal Adapter.

Tubes With "TC" Endings

This book does not list tubes with endings of TC01, TC02, etc. "TC" endings refer only to the bonded yoke. These tubes are identical to ones with a "P22" or "B22" ending.

Tubes beginning with "MV"

When testing a tube beginning with "MV", the listing will be found by dropping the MV and looking up the remainder of the tube number. For example, MVA63AAMOOX will be found listed as A63AAMOOX.

Using The Universal Adapter (UA)

The set-up numbers in this book refer to the pin numbers of the CRT gun elements. Connect the UA leads to the CRT pins by using the set-up information listed in this book. However, the CR70 switches must be set up as follows:

CR70 Switch	UA Switch Setting
F1	1
F2	2
K	3
G1	4
G2	5

The CR70 switches must be set at these positions when using the UA on any tube.

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A34JRY24X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JSG03X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JTB00X	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
A34JTJ00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34JTJ20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34JTJ21X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JTM90X	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A34JTR60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JTR62X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JTR80X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JUG00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JUG40X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34JVC00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34JWH05X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34JWH15X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34JWL00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34JWL40X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A34JWV60X	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A34JXV11X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34KAD00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A34KAD01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A34KCK04X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A34KCL04X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A34KCM00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A34KCP02XX	3	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A34KCP12X	3	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A34KCQ02XX	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A34KCQ12X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A34KCS05X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A34KCZ24X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A34KFC00XX	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A34KFC02XX	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A34KFC07XX	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A34KFC08X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A34KFC10XX	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A34KFC12X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A34KFC42X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A34KFC47X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A34KFC60X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A34KFC70X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A35JCD05X	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
A36ACG10X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A36EAE01X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A36EAM00X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A36EBH01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JAR00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JAR01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JAR10X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JAR30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JAR32X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JAR39X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JAR40X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JAR50X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JAR53X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JAR80X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JAR83X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JAR90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JAR93X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JFT00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JFT30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JFT60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JHP00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JHP30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A36JHP90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JJG01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JJM00X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A36JJM01X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A36JJM60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JJM61X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A36JJR01X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A36JJR03X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JNS00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JPA30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JSW20X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36JSW70X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A36JUF00X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A36JUF60X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A36KDL02X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A36KDL07X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A37JUW10X	UA	VIDEO	7	8	6.3	68V	R G B	12 11 10	6 9 13	5 5 5
A38AAB10X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A38ABE60X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A38ABE61X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A38ABE62X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A38ABE63X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A38ABE67X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A38ABL30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A38ABW60X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A38ABW61X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A38ABW62X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A38ACF60X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A38EAC00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38EAC50X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38EAP00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JAH23X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A38JAH40X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A38JAK70X	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
A38JAN30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JAN40X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JAN80X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JAN81X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JAN82X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JAN91X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JBH05X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JBH36X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JBH50X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A38JBN90X	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
A38JCD05X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JCD95X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JDB36X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A38JEY00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JFH00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JFH30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JFH90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JFY05X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JGH90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JJB90X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A38JLL20X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JLL70X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A38JMW20X	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A38JMW70X	5/10	VIDEO	6	7	6.3	52V	R G B	8 12 3	9 9 9	10 10 10
A38JRD30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JRL00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A38JSM00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A38JSM03X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A38JSM23X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A38JTM90X	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A38JWA00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A38JWA30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A38JXL00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38JYA30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38KAE30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38KAE40X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A38KDE02X	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A38KDE12X	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A38KDF02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A38KDF12X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A41EAM00X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A41JAR00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A41JAR01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A41JAR10X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A41JAR40X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A41JAR41X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A41JAR43X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A41JAR50X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A41JAR65X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A41JHP00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A41JHP90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A41JHR00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A41JHR90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43AAZ00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43AAZ21X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43AAZ25X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43ACR24X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43ADU45X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A43ADU46X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A43ADU615X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43ADU616X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43JAN30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JAN33X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JAN34X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JAN35X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JAN40X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JAN43X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JAN44	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JAN90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JAN93X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JAY00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A43JAY02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43JBE50X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A43JBT01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43JCD01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JCD05X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JCD07X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JCD08X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JCD95X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JCE01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JCE10X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JCT02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43JDK00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43JDK20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43JDS00X	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
A43JEH05X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43JFF00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43JG201X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43JLL20X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A43JLL70X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JLL90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JLP06X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43JQF00X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A43JQS00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A43JRE00X	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A43JRE08X	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A43JRK00X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A43JRQ00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43JSQ00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43JUG00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JUG40X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JUK00X	UA	VIDEO	6	7	6.3	52V	R G B	5 9 10	8 8 8	4 4 4
A43JUK04X	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
A43JXJ01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43JZG61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43KAR60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A43KDG02X	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A43KDG12X	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A43KDH02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43KDH12X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A43KGN60	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A44JFU00X	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
A44JFZ00X	5/10	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	12 12 12
A44JFZ10X	5/10	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	12 12 12
A46JAR00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A46JAR33X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JAR40X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JAR43X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JAR44X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JAR45X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JAR50X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JAR60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JAR61X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JAR62X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JAR83X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JAR90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JAR93X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JAR96X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JAR97X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JAR98X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JDL00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JDL01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JDL10X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A46JDL30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JDL60X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A46JDL61X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A46JED60X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JHL00X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JHP31X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JHP32X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JHP33X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JHP91X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JHP92X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JHP93X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JHR00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A46JHR30X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A46JJJ00X	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JJJ60X	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JJK60X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JL00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A46JJS01X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JJS03X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JNT00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A46JPE90X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JPE96X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JSF01X	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
A46JSW20X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A46JSW70X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A46JXM91X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A46JXW91X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48AAB00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAB10X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAB11X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAB20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAB21X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAB22X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAB26X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A48AAB27X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A48AAB30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAB35X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A48AAB50X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAB60X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A48AAD10X	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A48AAG01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAG02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAJ00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAJ10X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48AAJ33X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAK03X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A48AAK03X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAK04X	3	VIDEO	9	10	6.3	68V	R R G	8 6 11	5 5 5	7 7 7
A48AAK05X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAN01X	3	VIDEO	9	10	6.3	68V	R R G	8 6 11	5 5 5	7 7 7
A48AAN02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAN03X	3	VIDEO	9	10	6.3	68V	R R G	8 6 11	5 5 5	7 7 7
A48AAP02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAR00X	3	VIDEO	9	10	6.3	68V	R R G	8 6 11	5 5 5	7 7 7
A48AAR21X	3	VIDEO	9	10	6.3	68V	R R G	8 6 11	5 5 5	7 7 7
A48AAR25X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAR28X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAR29X	3	VIDEO	9	10	6.3	68V	R R G	8 6 11	5 5 5	7 7 7
A48AAR30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAR50X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAX01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAX02X	3	VIDEO	9	10	6.3	68V	R R G	8 6 11	5 5 5	7 7 7
A48AAZ06X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AAZ26X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ABB00X	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
A48ABE10X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ABE60X	3	VIDEO	9	10	6.3	68V	R R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A48ABE65X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ABH20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ABH26X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ABK00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48ABK01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48ABK02X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48ABK03X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48ABK04X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48ABK05X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48ABK06X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48ABK07X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48ABS51X	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
A48ABS52X	7	VIDEO	7	8	6.3	68V	R G B	12 10 13	9 9 9	11 11 11
A48ABT02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ABT51X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ABT52X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ABW20X	5/10	VIDEO	6	7	6.3	52V	R G B	8 12 3	9 9 9	10 10 10
A48ABW25X	5/10	VIDEO	6	7	6.3	52V	R G B	8 12 3	9 9 9	10 10 10
A48ABY00X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A48ACB00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ACB01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A48ACB02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ACB12X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ACB52X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ACD30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ACD35X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A48ACE26X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ACE40X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ADE00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48ADE01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48ADE22X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48ADF00	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48ADU55X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A48ADU56X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A48ADU615X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48ADU616X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48AEY10X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48AEY50X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48EAB00X	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A48EAB01X	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A48EAC00X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A48EAP00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A48JAF01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JAF03X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JAF11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JAH05X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JAH39X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JAH40X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JAH59X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JAH80	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JAK70X	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
A48JAN33X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JAN34X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JAN35X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JAN40X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JAN43X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JAN44X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JAN45X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JAN46X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JAN50X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JAN83X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JAN90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JAN91	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A48JAN92X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JAQ00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JAU00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JAZ70X	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
A48JAZ90X	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
A48JBE30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JBE39X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JBH00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JBH36X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JBH40X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A48JBK00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JBM05X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JBM90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JBM95	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JBQ10X	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A48JBS01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JBV00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JCD05X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JCD08X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JCD09X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JCD95X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JCD98X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A48JCD99X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JCF00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JCL00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JCL22X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JCL30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JDD00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JDD01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JDD02X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JDJ00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JDK00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JDK01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JDK11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JDS00X	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
A48JEH05X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JEX01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JEX03X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JFH00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JGQ35X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JGQ60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JGR36X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JGR40X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A48JGR43X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A48JGR46X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A48JHT00X	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
A48JHT50X	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
A48JJB90X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A48JJY01X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A48JJY51X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
A48JJY61X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A48JJY81X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A48JKL00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A48JKL08X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A48JLK22X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A48JLL20X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A48JLL70X	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
A48JMX20X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A48JMX70X	5/10	VIDEO	6	7	6.3	52V	R	8	9	10
							G	12	9	10
							B	3	9	10
A48JNW00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A48JNW20X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A48JPZ60X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A48JQA60X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A48JQG50X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A48JQG60X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A48JQG90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JQG93X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JQH00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JQH30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JQH40X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JQH50X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JQH60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JQH90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JQH93X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JQL60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JQT00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JQV60X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A48JRK10X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JRV20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JRV70X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A48JSH11X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48JSK61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JSN20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JSQ00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JSZ60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A48JTM90X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A48JTN31X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JUE68X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JUJ20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JVS61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JWH10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JWH11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48JXP01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48KAD00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48KAD20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48KCN43X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48KCN45X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A48KCR02XX	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A48KCR12X	3	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A48KCS02XX	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48KCS12XX	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48KCS60XX	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48KCS70XX	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48KGE10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48KGE12X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A48KHU60	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A48KJH60	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A48KJX000X	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4
A48KKM60X	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
A48KLD50X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A48KLD52	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A48KLD60	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A48KLD83	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A48KLD90	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A48KLD91	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A48KLD92	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
A49JHT70X	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
A49JLB50X	UA	VIDEO	5	6	6.3	68V	R	10	11	3
							G	9	11	3
							B	8	11	3
A49JLB50X	UA	VIDEO	5	6	6.3	68V	R	10	11	3
							G	9	11	3
							B	8	11	3
A49JLV50X	UA	VIDEO	5	6	6.3	68V	R	10	11	3
							G	9	11	3
							B	8	11	3
A51ABU10X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A51ABU14X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A51ABU25X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A51ABU51X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A51ABU55X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A51ACB02X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A51ACB12X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A51ACC10X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A51ACG10X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ACG14X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ACG20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ACG21X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ACG25X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51ACG26X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ACG27X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ACG30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ACG31X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ACG33X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ACG50X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ACG51X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ACG55X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ACG65X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ACT00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ACT26X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ADL00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ADM20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ADM25X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ADM35X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ADR26X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A51ADR40X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ADU95X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ADU96X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ADU115X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ADU116X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51ADY00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51ADY01X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51ADY02X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51ADZ00	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51AEZ10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51AEZ50X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51AEZ51X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51EAF00X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51EAF01X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51EAS00X	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51EAS02X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51EAT00X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51EAT01X	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51EAT02X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51EBD00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51EBD00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A51EBD10X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51EBS00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51EBS10X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51EBS20X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51EBS30X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51EBV00X	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51JAR00X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR03X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR10X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR31X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR33X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR34X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR35X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR40X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR43X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR43X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR44	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR44X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR45X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR50X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A51JAR59X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JAR60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR61X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR62X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR65X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR66X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR67X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR83X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR91X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR92X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR93X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR95X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR96X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR97X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR98X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JAR99X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JCC01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JCC02X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51JCC03X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JCC09X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A51JCC11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JCC21X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JCC23X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51JCC30X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51JCC31X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51JCC33	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JCC33X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51JCC51X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JCC61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JCC80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JCC81X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JCC90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JCC91X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JEW00X	UA	VIDEO	6	7	6.3	52V	R G B	5 9 10	8 8 8	4 4 4
A51JFC00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JFC01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JFC09X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JFC30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JFC60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JFC61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JFC61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A51JFC62X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JFC69X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JFC80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JJF00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JJF01X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51JJF60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JJF61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JJF62X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JJL00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JJL30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JJL90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JJL99X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JKQ00X	UA	VIDEO	4	5	6.3	68V	R G B	9 8 7	3 3 3	2 2 2
A51JKQ10X	UA	VIDEO	4	5	6.3	68V	R G B	9 8 7	3 3 3	2 2 2
A51JKQ50X	UA	VIDEO	4	5	6.3	68V	R G B	9 8 7	3 3 3	2 2 2
A51JKY04X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JKY34X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JKY94X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JML11X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JML31X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JML81X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A51JPD60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JPE30X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JPE43X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JPE60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JPE90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JPE96X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JPE99X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JQE01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JRR60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JRU30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JRU31X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JRU34X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JRU40X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JRU42X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JRU46X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JRU50X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JRU90X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51JRU96X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JRX60X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A51JSV11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JSW20X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A51JSW70X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A51JSX01X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A51JSX61X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A51JSY01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JSY61X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51JSY61X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JSY63X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JSY69X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A51JTA60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JUH10X	UA	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	3 3 3
A51JUH50X	UA	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	3 3 3
A51JUL91X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JVJ31X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JVJ91X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JVP60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51JXH60X	UA	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	3 3 3
A51JXS91X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JXS95X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JXS97X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JXS98X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JYR10X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A51JZD23X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51JZE23X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KAK02XX	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KAK07X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KAK12X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KAK17X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KAS10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KAS11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KAS31X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KAS61X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KAS81X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KAT11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KDJ02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KEF60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51KEQ90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KEQ93X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KES91X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51KGM90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51KGM93X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51KGP90X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51KGP93X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51KHA90	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A51KJA61	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KJA80	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KJN61	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KJV93	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A51KKP93	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51KKS42X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A53AAY12X	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11
A53ADG35X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A53EAB00X	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A53JAH10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A53JAN32X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A53JAQ36X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A53JBM05X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A53JBM35X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A53JBM95X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A53JBM97X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A53JBW00X	4	VIDEO	1	8	6.3	52V	R G B	6 4 3	7 7 7	5 5 5
A53JBW01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A53JBW02X	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
A53JCG00X	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
A53JDE50X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A53JDE60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A53JDH00X	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
A53JHA00X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A53JHK00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A53JWJ10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56JKX00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56JKX30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56JKZ30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56JKZ60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56JKZ61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56JMQ30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56JMQ60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59EAF00X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59EAF01X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59EAK00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A59EAS00X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59EAS02X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A59EAU00X	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A59ECF00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JJZ01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JJZ43X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A59JJZ87X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JMZ30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JMZ40X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JMZ43X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JMZ83X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JMZ90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JMZ93X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JMZ95X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JMZ96X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A59JMZ140X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JMZ141	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JMZ142	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JSA60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JVQ60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JVQ64X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A59JVQ160	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JVQ260X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A59JWB00X	UA	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	3 3 3
A59JWB10X	UA	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	3 3 3
A59JWB60X	UA	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	3 3 3
A59JWC00X	UA	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	3 3 3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A59JWC10X	UA	VIDEO	5	6	6.3	68V	R	10	11	3
							G	9	11	3
							B	8	11	3
A59JWC60X	UA	VIDEO	5	6	6.3	68V	R	10	11	3
							G	9	11	3
							B	8	11	3
A59JYB11X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A59JYB48	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A59JYB61X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A59JYN90X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A59JYN93X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A59JYN96X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A59KFS60	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A59KFS61X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A59KFS64	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A59KFS80	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A59KFZ11X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A59KHN64X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A59KHQ46	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A59KHQ93X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A59KHQ96X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63AA010X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63AAD10X	9	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63AAM00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63AAM01X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A63AAM02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAM03X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAM04X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAM05X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAM06X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAM07X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAM08X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAM09X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAM10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAM11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAM12X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAM13X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAT30X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAT31X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAT32X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAT36X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAX00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAX01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAX02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAX12X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAX42X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AAY00X	7	VIDEO	7	8	6.3	52V	R G B	12 10 13	9 9 9	11 11 11

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A63AAY01X	7	VIDEO	7	8	6.3	52V	R	12	9	11
							G	10	9	11
							B	13	9	11
A63AAY02X	7	VIDEO	7	8	6.3	52V	R	12	9	11
							G	10	9	11
							B	13	9	11
A63AAY11X	7	VIDEO	7	8	6.3	52V	R	12	9	11
							G	10	9	11
							B	13	9	11
A63AAY12X	7	VIDEO	7	8	6.3	52V	R	12	9	11
							G	10	9	11
							B	13	9	11
A63AAY71X	7	VIDEO	7	8	6.3	52V	R	12	9	11
							G	10	9	11
							B	13	9	11
A63ABE27X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63ABF00X	7	VIDEO	7	8	6.3	68V	R	12	9	11
							G	10	9	11
							B	13	9	11
A63ABG02X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63ABG05X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63ABG20X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63ABG25X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63ABG27X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63ABG35X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63ABL15X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63ABP00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63ABP05X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63ABP10X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63ABP11X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63ABP12X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63ABP13X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A63ABP20X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A63ABP25X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ABP26X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ABP50X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ABP51X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A63ABP55X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ABZ06X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ABZ26X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ABZ40X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ABZ60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ACM71X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ACM75X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ACP00X	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A63ACP27X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ACQ00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ACQ01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ADG25X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ADG27X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ADN26X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ADN40X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A63ADT10	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63ADT26	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A63AEH20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AFC20	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63AGG25X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63EAB00X	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A63JAV00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JBG00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JBG20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JBG50X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JBG80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	12 12 12	7 7 7
A63JBG82X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	12 12 12	7 7 7
A63JDC05X	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
A63JDF00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JDF91X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JDP20X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A63JDP35X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A63JDP36X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A63JDP37X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A63JEC00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JEC30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JEZ00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JGC01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A63JGC11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JGY33X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JGY93X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A63JHF01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JHF80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JHF81X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JKC00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JLQ90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JPD35X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A63JPW03X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A63JPW40X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
A63JWJ00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A63JWJ10X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A63JXQ83X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	12 12 12	7 7 7
A63JXQ85X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	12 12 12	7 7 7
A63JXX91X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A63JXX93X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A64JJKJ11X	5/10	VIDEO	6	7	6.3	68V	R G B	12 10 8	4 4 4	5 5 5
A64JKB00X	1	VIDEO	5	6	6.3	68V	R G B	11 9 7	3 3 3	4 4 4
A64JKJ00X	1	VIDEO	5	6	6.3	68V	R G B	11 9 7	3 3 3	4 4 4
A64JKJ10X	1	VIDEO	5	6	6.3	68V	R G B	11 9 7	3 3 3	4 4 4
A64JKJ11X	1	VIDEO	5	6	6.3	68V	R G B	11 9 7	3 3 3	4 4 4

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A64JV1260X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A64JV1280X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A64JVQ60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A64JVQ64X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A64JVQ80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A64JYC11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A64KDC11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A64KFZ11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A64KFZ95X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66AAM00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66AAM01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66AAM02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66AAM03X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66AAM04X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU05X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU10X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU11X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU14X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU32X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL.	NEG BIAS	GUN	K	G1	G2
A66ABU35X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU36X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU37X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU38X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU39X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU40X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU50X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU51X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU52X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU55X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ABU56X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ACZ40X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ADQ00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A66ADQ01X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ADQ02X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A66ADQ03X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A66ADS26X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ADS40X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ADT14X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ADT16X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66ADT18	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A66ADT18X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66ADT35	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66ADT36	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66ADU45X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66ADU46X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66ADU95X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66ADU96X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66AEK20X	3	VIDEO	9	10	6.3	36V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66EAF00X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66EAF01X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66EAK50X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66EAK51X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66EAS00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66EAS02X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66EAX00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66ECF00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66JKA00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66JKA01X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66JKA09X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66JKA11X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A66JLH50X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A66JLH60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JLH61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JLH62X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JLH70X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A66JLH71X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JLH72X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JLH86X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JLH87X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JLH88X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JLH90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JLH91	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JLH92X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JLH96X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A66JM241	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JMZ00X	1	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	12 12 12
A66JMZ30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JMZ33X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JMZ40	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JMZ42X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JPP01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JPP11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A66JPQ01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JQP70X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JQP86X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JQP90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JQP91X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JQP99X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JYP90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66JYP96X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66KAF97X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66KAF98X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66KAV97X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66KEJ30X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66KHP96X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A66KHW96X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A67JHG00X	1	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	12 12 12
A67JHG01X	1	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	12 12 12
A68ACC10X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A68ACC11X	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A68ACC12X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A68ACC14X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A68ACC30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A68ACC35X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A68ACE00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68ACT00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68ACT11X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68ACT63X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68ADZ00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68AEC00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68AEC01X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68AED00	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68AEG10X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68AEG11X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68AEG20X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68AER09X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68AER10X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68AEU00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68EAU00X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68JMT10X	UA	VIDEO	7	8	6.3	68V	R	12	6	5
							G	11	6	5
							B	10	6	5
A68JMT50X	UA	VIDEO	7	8	6.3	68V	R	12	6	5
							G	11	6	5
							B	10	6	5
A68JQP93X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68JQP96X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68JRZ60X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68JSA60X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A68JSA62X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68JSA64X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68JVQ60X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68JVQ62X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68JVQ64X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68JVQ70X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68JVQ80X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68JVQ160X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68JVQ260X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68JVQ280X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68JYK10X	UA	VIDEO	7	8	6.3	68V	R	12	6	5
							G	11	6	5
							B	10	6	5
A68JYK50X	UA	VIDEO	7	8	6.3	68V	R	12	6	5
							G	11	6	5
							B	10	6	5
A68JYK60X	UA	VIDEO	7	8	6.3	68V	R	12	6	5
							G	11	6	5
							B	10	6	5
A68JYL60X	UA	VIDEO	7	8	6.3	68V	R	12	6	5
							G	11	6	5
							B	10	6	5
A68KAF96X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68KDC11X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68KFS60X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68KFS70X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68KFS160X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68Kfv60X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A68Kfv70X	UA	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A68KFZ11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A68KFZ95X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A68KFZ98X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A68KHP96X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A68KHZ93	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A68KHZ96	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A68KJQ11	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A68KJQ45	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A68KKT96X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A70JYQ96X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A70JYQ97X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A70KJJ96	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A74JVB60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A74JVB70	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A76JTS90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A76JTS91X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A76JTS99X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A76JYQ90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A76JYQ96X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A76JYQ97X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A76JYQ98X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A76JZH90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A76KDT90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A76KHJ90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A76KJJ96X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A78JUA25X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A78JVB30X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A78JVB60X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A78JVB61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A78JVB63X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A78JVB70X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A78JVB71	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A78JVB170X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A78JVB561	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A78KEH60X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A78KEH70X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A79AEJ10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A79AET09X	UA	VIDEO	10	11	6.3	68V	R G B	9 7 12	6 6 6	8 8 8
A79AET10X	UA	VIDEO	10	11	6.3	68V	R G B	9 7 12	6 6 6	8 8 8
A79AEX25	UA	VIDEO	10	11	6.3	68V	R G B	9 7 12	6 6 6	8 8 8
A79KGS70X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A79KHK70X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A79KJP70	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A79KJT70	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A80JTS96	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A80JTS96X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A80JYQ96	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A80JYV10X	UA	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	3 3 3
A80JZH90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A80KGY96	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A80KHT90	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A80KJJ96	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A80KJK96	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A89JKA31X	UA	VIDEO	10	11	6.3	68V	R G B	9 7 12	6 6 6	8 8 8
A89JKA61X	UA	VIDEO	10	11	6.3	68V	R G B	9 7 12	6 6 6	8 8 8
A89JKA81X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A89JKA91X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A89JVU11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A89JVU31X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A89JVU61X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A89JVU81X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A89JVU81X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A89JVU91X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A89JVV91X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A59-9W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A17-69	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
A23-10W	6	VIDEO	3	4	12.0	52V	B/W	1	5	6
A28-11W	6	VIDEO	3	4	11	52V	B/W	2	5	6
A28-12W	6	VIDEO	3	4	11	52V	B/W	2	5	6
A28-13W	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
A28-14W	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
A28-15W	6	VIDEO	3	4	12.0	20V	B/W	1	5	6
A31-12W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A31-14W	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
A31-15W	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
A31-16W	4	VIDEO	1	8	4.2	36V	B/W	7	2	3
A31-17W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A31-18W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A31-19W	6	VIDEO	3	4	11	52V	B/W	2	5	6
A31-20W	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
A38-11X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A38-12X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A40-11W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A40-12W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A41-10W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A44-12W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A44-13W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A44-18W	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
A47-11W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A47-13W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A47-14W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A47-17W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A47-21W	4	VIDEO	1	8	4.2	52V	B/W	7	2	3
A47-22W	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
A47-23W	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
A47-25W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A47-26W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A47-27W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A47-28W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A49-10X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A49-11X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A49-12X	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
A49-14X	2	VIDEO	1	14	6.3	52V	R	2	3	4
							G	6	7	5
							B	11	12	13
A49-15X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A49-16X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A49-17X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A49-18X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A50-12W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A51-10W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A55-13X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A55-14X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A55-15X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A55-16X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A55-17X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A55-18X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A55-19X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A55-20X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A55-21X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A56-11X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A59-11W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A59-12W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A59-13W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A59-15W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A59-16W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A59-22W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A59-23W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A59-25W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A63-11X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A63-12X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A63-13X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A63-15X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A63-16X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A63-17X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A63-18X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A63-19X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A65-11W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A65-13W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A23-110W	6	VIDEO	3	4	9.0	20V	B/W	1	5	6
A24-512W	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
A31-120W	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
A31-121W	6	VIDEO	3	4	11	52V	B/W	2	5	6
A31-181W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A31-191W	6	VIDEO	3	4	11	52V	B/W	2	5	6
A31-250W	6	VIDEO	3	4	11	52V	B/W	2	5	6
A31-251W	6	VIDEO	3	4	11	52V	B/W	2	5	6
A31-262W	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
A31-265W	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
A31-270W	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
A31-280W	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
A31-290W	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
A31-300W	6	VIDEO	3	4	11	52V	B/W	2	5	6
A31-320W	6	VIDEO	3	4	11	52V	B/W	2	5	6
A31-322W	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
A31-390W	6	VIDEO	3	4	11	52V	B/W	2	5	6
A31-410W	6	VIDEO	3	4	11	52V	B/W	2	5	6
A31-450W	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
A31-510W	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
A34-111W	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
A34-510W	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
A37-110W	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
A37-161X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A37-420X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A37-471X	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
A37-550X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A37-552X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A37-554X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A37-570X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A37-573	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
A37-590X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A37-591	9	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
A37-598X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
A37-599X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
A38-160W	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
A38-170W	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
A42-100X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A42-161X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A42-163X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A42-168X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A42-263X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A42-268	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A42-420X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A42-426X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A42-472X	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
A42-554X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A42-556X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A42-570X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
A42-590X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
A42-591X	9	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
A42-592X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
A42-593X	9	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
A44-120W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A44-123W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A44-171W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A44-172W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A44-270X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A44-271W	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
A44-280W	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
A44-281W	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
A44-510W	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
A44-520W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A47-330W	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
A47-341	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A47-342X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A47-343X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A47-500X	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
A47-550X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A47-552X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A47-556X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A49-120X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A49-190X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A49-191X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A49-192X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A49-200X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A49-220X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A50-120W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A50-123W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A50-171W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A50-182W	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
A50-520W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A51-110X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A51-111X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A51-112X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A51-150X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
A51-152X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
A51-161X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A51-163X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A51-168X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A51-170X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A51-180X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A51-190X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
A51-191X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
A51-210X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A51-211X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
A51-213X	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
A51-214X	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
A51-215X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A51-220X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A51-230X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A51-231X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51-232X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51-263X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A51-268X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51-270X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A51-400X	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
A51-420X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51-421X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51-422X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51-423X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A51-424X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51-425X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51-426X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51-427X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51-469X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
A51-500X	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
A51-510X	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
A51-540X	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
A51-550X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A51-556X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A51-570X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A51-572X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
A51575X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A51-580X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A51-590X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A55-141X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A56-120X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A56-121X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A56-123X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A56-130	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A56-140X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A56-150X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A56-160X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
A56-270X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A56-280X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56-410X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A56-420X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56-421X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56-426X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56-500X	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
A56-510X	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
A56-540X	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
A56-575	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A56-610X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A56-611X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A56-612X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A56-613X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A56-615X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A56-700X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56-701X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56-702X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56-705X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A56-707X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56-708X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56-711X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56-712X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56-713X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A56-715X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A61-120W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A61-123W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A61-171W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A61-520W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
A63-120X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A63-200X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A63-210X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A63-220X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A65-120X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A65-140X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A66-120X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A66-140X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A66-410X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A66-500X	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
A66-501X	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
A66-510X	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
A66-540X	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
A67-100X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A67-110X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A67-120X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A67-130X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A67-140X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A67-150X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A67-155X	5/10	VIDEO	6	7	6.3	52V	R G B	8 12 3	9 9 9	10 10 10
A67-200X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A67-250X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A67-260X	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
A67-410X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
A67-510X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 13 4	10 11 5
A67-560X	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
A67-610X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A67-611X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A67-612X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A67-615X	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
A67-700X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A67-701X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A67-702X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A67-705X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A67-707X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
A67-708	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A67-711X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A67-712X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A67-713X	9	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
A67-714X	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A67-715X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A67-716X	9	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
A67-717X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
AT14A9	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
AT20A9	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
AT142	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
AT1229	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
AT1231	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
AT1239	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
AT1429	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
AT1439	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
AT1459	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
AT1460	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
AT1490	3	VIDEO	9	10	6.3	68	R G B	8 6 11	5 5 5	7 7 7
AT2029	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
AW17-69	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
AW36-91	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
AW40-12	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
AW42-12	4	VIDEO	1	8	6.0	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
AW42-20	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
AW43-20	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
AW43-80	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
AW43-88	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
AW47-12	4	VIDEO	1	8	6.0	52V	B/W	7	2	3
AW47-30	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
AW47-90	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
AW47-91	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
AW53-80	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
AW53-88	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
AW53-89	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
AW59-90	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
AW59-91	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
AW61-88	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
BC4379	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4380	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4386	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4390	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4391	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4396	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4398	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4399	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4532	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4592	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
BC4593	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
BC4594	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
BC4809	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4892	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4893	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4894	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4908	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4909	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4917	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4922	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4923	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4924	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4927	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4937	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4992	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
BC4993	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
BC4994	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
BC7735	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC8134	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC8480	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC8507	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC8541	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
C5M36P22	UA	PROJ	6	7	6.3	68V	B/W	8	5	10
C5M64P22	2	PROJ	1	14	6.3	52V	B/W	13	12	11
C5M75P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C5M92P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C5M102P22	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
C5M109P22	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
C5M120P22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
C5M146P22	3	VIDEO	6	7	6.3	36V	B/W	8	5	10
C5M148P22	3	VIDEO	6	7	6.3	36V	B/W	8	5	10
C5M1022P22	2	PROJ	1	14	6.3	52V	B/W	13	12	11
C6M34P22	3	VIDEO	6	7	6.3	20V	B/W	8	4	10
C6M36P22B	3	VIDEO	6	7	6.3	20V	B/W	8	4	10
C6M39P22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
C7M24P22	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
C7M108P22	3	VIDEO	6	7	6.3	68V	B/W	8	4	10
C7M130P22	3	VIDEO	6	7	6.3	68V	B/W	8	4	10
C8M46P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C9M53P4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
C9M54P4	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
C9M60P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C12M02P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C12M09P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C12M21P4	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
C12M27P4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
C12M34P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C12M40P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C14M34P4	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
C14M37P4	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
C14M45P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C14M48P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C15M18P4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
C15M22P4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
C17AA	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
C21AA	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
C316P4	6	VIDEO	3	4	12.0	36V	B/W	1	5	6
C327P1	2	SCOPE	1	14	6.3	68V	B/W	3	2	7
C505P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C507P	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C509P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C510P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C520P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C521P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C537P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C550P4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
C706P4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
C751Z2P39	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C814P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C816P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C820P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C822P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C824P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C924P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C925P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C935P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C938P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C939P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C942P4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
C1005P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C1011P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C1012P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C1254P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C1260P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C1262P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C1270P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C1272P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C1274P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C1289P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C1301P4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
C1302P4	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
C1421P4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
C1423P4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
C1426P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C1427P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C1428P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C1429P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C1634P4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
C1637P4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
C1717P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
C1720P4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
C2017P4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
C2307P4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE8	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
CE14	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE74	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE104	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
CE158	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE159	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE162	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
CE183	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
CE190	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE195	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE219	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE233	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
CE263	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
CE264	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE272	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
CE274	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE278	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
CE284	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE310	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE311	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE317	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE319	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE321	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
CE323	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE325	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE335	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
CE350	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
CE360	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
CE361	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE374	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE384	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE387	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE391	2	VIDEO	1	14	6.3	36V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE394	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
CE398	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
CE399	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE434	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE435	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE450	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE450	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE453	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE454	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE455	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE474	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE485	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE486	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE493	6	VIDEO	3	4	12	36V	B/W	2	5	6
CE500	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE503	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE522	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE524	2	VIDEO	1	14	6.3	36V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE526	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE528	2	PROJ	1	14	6.3	52V	B/W	13	12	11
CE530	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE531	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE534	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE539	4	VIDEO	1	8	12.0	36V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
CE544	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE545	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE547	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
CE551	2	VIDEO	1	14	12.0	36V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE553	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE555	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE556	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE563	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE566	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
CE574	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE585	2	VIDEO	1	14	6.0	36V	B/W	13	5	11
CE588	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
CE590	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE596	2	VIDEO	1	14	12.6	52V	B/W	13	5	11
CE599	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE601	2	VIDEO	1	14	6.3	52V	B/W	13	5	11
CE602	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
CE603	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE605	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE611	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE615	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
CE617	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE622	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE645	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE650	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE656	2	VIDEO	1	14	6.3	52V	B/W	13	5	11
CE661	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE663	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE667	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE668	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE673	2	VIDEO	1	14	6.3	52V	B/W	13	5	11
CE675	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE677	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE678	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE681	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE683	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE684	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE685	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE687	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE688	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE689	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE693	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE695	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE703	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE706	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE710	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE713	2	PROJ	1	14	6.3	52V	B/W	13	12	11
CE715	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
CE727	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE727	6	VIDEO	3	4	6.3	68V	B/W	2	5	6
CE730	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE732	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE733	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE741	2	VIDEO	1	14	6.3	68V	B/W	13	5	11
CE743	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
CE744	4	VIDEO	1	8	12.0	20V	B/W	7	2	3
CE745	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE748	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
CE751	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE752	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE754	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE755	4	VIDEO	1	8	12.0	36V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
CE758	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE762	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE763	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE767	2	VIDEO	1	14	6.3	36V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE770	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
CE771	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE772	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE776	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE777	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE779	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
CE780	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
CE781	2	PROJ	1	14	6.3	68V	B/W	13	12	11
CE782	2	VIDEO	1	14	6.3	52V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE784	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE786	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE787	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE788	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE789	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE790	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE791	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE792	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE793	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE798	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE799	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE800	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE802	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE803	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE804	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE806	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE808	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE809	6	VIDEO	3	4	12.6	52V	B/W	2	5	6
CE810	6	VIDEO	3	4	12.6	52V	B/W	2	5	6
CE811	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE814	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE815	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE816	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE817	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE818	2	VIDEO	1	14	6.3	36V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE819	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE820	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE821	2	VIDEO	1	14	6.3	36V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE822	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE824	2	VIDEO	1	14	6.3	52V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE825	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE826	2	VIDEO	1	14	6.3	52V	B/W	13	5	11
CE827	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE828	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE829	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE830	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE831	4	VIDEO	1	8	12.0	68V	B/W	7	2	3
CE832	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE833	6	VIDEO	3	4	12.0	36V	B/W	2	5	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
CE835	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE836	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE837	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE838	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE839	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE840	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE841	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE842	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE843	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE844	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE845	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE846	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE847	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE849	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE851	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE852	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE853	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE854	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE855	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE856	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE857	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE858	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
CE859	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE860	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE861	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE862	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE863	6	VIDEO	3	4	11.0	68V	B/W	2	5	6
CE864	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE865	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE866	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE868	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE869	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE870	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE871	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE872	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE873	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE874	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
CE875	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE877	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE878	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE882	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE884	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE885	2	VIDEO	1	14	6.3	36V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE886	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE889	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE890	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE892	2	VIDEO	1	14	6.3	36V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE893	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE895	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
CE896	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE897	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE898	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE899	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE900	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE901	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE902	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE903	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE904	6	VIDEO	3	4	12.0	52V	B/W	2	5	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
CE905	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE906	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE907	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE908	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE909	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
CE910	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE911	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE912	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE913	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE914	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE915	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE916	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE917	2	VIDEO	1	14	6.3	36V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE918	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE919	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE920	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE921	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE922	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE923	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE924	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE925	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE926	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE927	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE928	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE929	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE930	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE931	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE932	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE933	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE934	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE935	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE936	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE937	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE938	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE939	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE940	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE941	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE942	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE943	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
CE944	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE945	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE946	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE947	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE948	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE949	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
CE950	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE951	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
CE952	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CE954	2	VIDEO	1	14	6.3	36V	R	2	3	4
							G	6	7	5
							B	11	12	13
CE956	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CEULC99F1	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
CPJ310N1U	6	VIDEO	3	4	11.8	52V	B/W	2	5	6
CT48	6	VIDEO	3	4	12	36V	B/W	1	5	6
CT450	6	VIDEO	3	4	12.0	52V	B/W	1	5	6
CT468	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
CT475	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
CT480	6	VIDEO	3	4	12	52V	B/W	2	5	6
CT488	4	VIDEO	1	8	12.0	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
CT490	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
CT494	4	VIDEO	1	8	6.3	52V	R	6	7	5
							G	4	7	5
							B	3	7	5
CT500	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
CT503	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
CT507	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
CT512	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
CT513	6	VIDEO	3	4	12	52V	B/W	2	5	6
CT531	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
CT532	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
CT537*	UA	VIDEO	3	7	0.5	68V	B/W	3	2	1
CT544	6	VIDEO	3	4	11.8	52V	B/W	2	5	6
CT555	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
CT2222	UA	CAMERA	3	10	6.5	20V	B/W	8	2	7
CT2222	UA	CAMERA	3	10	6.5	20V	B/W	8	2	7
CT2232	UA	CAMERA	3	10	6.5	20V	B/W	8	2	7
CT2232	UA	CAMERA	3	10	6.5	20V	B/W	8	2	7
CV6198	4	VIDEO	1	8	11.5	36V	B/W	7	2	3
D7-221GH	UA	SCOPE	1	14	6.3	68V	B/W	2	3	5
D14-121	UA	SCOPE	1	14	6.3	52V	B/W	7	3	9
D14-123	UA	SCOPE	1	14	6.3	68V	B/W	7	3	9
D14-162GH	UA	SCOPE	1	14	6.3	68V	B/W	7	3	9
D14-251GH	UA	SCOPE	1	14	6.3	68V	B/W	7	3	9
D14-370GH	2	SCOPE	1	14	6.3	68V	B/W	2	3	12
DA05-11	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
DA05-12	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
DA05-14	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
DA05-15	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
DS12NK156	UA	VIDEO	3	4	15	52V	B/W	2	1	6
E522	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E2026	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
E2112	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E2116	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
E2117	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
E2120*	UA	VIDEO	3	7	6.3	36V	B/W	3	2	5
E2148	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
E2172	6	VIDEO	3	4	11.0	68V	B/W	2	5	6
E2173	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
E2179	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
E2196	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
E2210	6	VIDEO	3	4	6.0	20V	B/W	2	5	6
E2211	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
E2241	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
E2273	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
E2277	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
E2280	6	VIDEO	3	4	6.0	52V	B/W	2	5	6
E2292	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
E2310	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
E2321	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
E2336	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
E2369	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
E2396	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13

* DIRECTLY HEATED CATHODE -
SEE OPERATING NOTES

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
E2406	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2407	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
E2418	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
E2422	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
E2426	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
E2427	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
E2434	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2436	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2437	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
E2447	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2462	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2468	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2481	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2482	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2483	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2484	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2485	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2486	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2487	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2488	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2493	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
E2494	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
E2495	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2496	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
E2497	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
E2498	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2499	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2500	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2501	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2502	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
E2503	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
E2504	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2505	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
E2506	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2507	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2508	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2509	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2510	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2511	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2512	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2513	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2514	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
E2515	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
E2516	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
E2517	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
E2518	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
E2519	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
E2520	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
E2521	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
E2522	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
E2523	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
E2524	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
E2525	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
E2526	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
E2527	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
E2528	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
E2529	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
E2530	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
E2531	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
E2532	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
E2533	2	VIDEO	1	14	6.3	68V	R	6	7	5
							G	4	3	2
							B	12	11	13
E2534	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
E2535	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3
E2536	5/10	VIDEO	7	9	6.3	68V	R	11	12	13
							G	8	10	6
							B	5	4	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
E2537	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2538	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2539	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2540	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2541	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2542	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2543	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
E2544	2	VIDEO	1	14	6.3	68V	R G B	6 4 12	7 3 11	5 2 13
E2545	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2546	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2547	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2548	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
E2549	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2550	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2551	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2552	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2553	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2554	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2555	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2556	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2557	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
E2560	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2561	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2562	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
E2565	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2570	2	VIDEO	1	6	6.3	68V	R G B	13 2 4	12 14 3	11 7 5
E2572	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2574	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2576	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2577	5/10	VIDEO	7	9	6.3	68V	R G B	11 8 5	12 10 4	13 6 3
E2578	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2579	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2581	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
E2581A	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
E2582	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
E2588	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2590	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
E2592	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
E2593	5/10	VIDEO	6	7	6.3	68V	R G B	8 12 3	9 9 9	10 10 10
E2594	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
E2595	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
E2596	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
E2598	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4
E2599	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4
E2613	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
E2614	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
E2667	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
E2675	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
E2683	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E2709	4	VIDEO	1	8	6.3	20V	B/W	7	2	3
E2710	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
E2719	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
E2720	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
E2724	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
E2726	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
E2728	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
E2732	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
E2733	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
E2735	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
E2740	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
E2759	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
E2763	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
E2765	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
E2787	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
E2791	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E2797	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
E2799	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
E2800	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
E2808	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
E2809	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
E2815	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E2817	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
E2819	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
E2836	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E2840	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E2850	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E2851	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
E2856	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E2861	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
E2862	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
E2864	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
E2871	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
E2882	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
E2883	5/10	VIDEO	7	9	6.3	52V	R	11	12	13
							G	8	10	6
							B	5	4	3
E2894	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
E2897	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
E2903	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E2904	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E2908	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
E2924	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
E2933	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E2934	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E2940	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
E2957	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
E2965	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
E2970	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
E2971	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
E2981	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
E2982	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
E2994	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
E2995	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
E6121	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
E6122	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
E6123	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
E6135	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
E6136	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8001	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8010	4	VIDEO	1	8	6.3	20V	B/W	7	2	3
E8019	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8028	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
E8032	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8066	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E8074B22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8075	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
E8077	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8089	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8092	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8097	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E8100	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8103	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8110	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8120	6	VIDEO	3	4	6.3	68V	B/W	2	5	6
E8135	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8136	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8139	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8142	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8162	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8183	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8207	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
E8215	3	VIDEO	9	10	6.3	36V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8234	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
E8404	2	VIDEO	1	14	6.3	36V	R	2	3	4
							G	6	7	5
							B	11	12	13
E8406	2	PROJ	1	14	6.3	52V	B/W	13	12	11
E8409	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
E8411	2	PROJ	1	14	6.3	52V	B/W	13	12	11
E8414	2	PROJ	1	14	6.3	52V	B/W	13	12	11
E8471B39	3	VIDEO	6	7	6.3	52V	B/W	8	4	10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
E81770	3	VIDEO	9	10	6.3	36V	R	8	5	7
							G	6	5	7
							B	11	5	7
ED-15*	UA	VIDEO	3	7	0.5	36V	B/W	3	2	1
EP96X16	2	PROJ	1	14	6.3	52V	B/W	13	12	11
EP96X17	2	PROJ	1	14	6.3	52V	B/W	13	12	11
EP96X18	2	PROJ	1	14	6.3	52V	B/W	13	12	11
EP96X19	2	PROJ	1	14	6.3	52V	B/W	13	12	11
EP96X20	2	PROJ	1	14	6.3	52V	B/W	13	12	11
EP96X21	2	PROJ	1	14	6.3	52V	B/W	13	12	11
EP96X24	3	PROJ	6	7	6.3	52V	B/W	8	11	10
EP96X25	3	PROJ	6	7	6.3	52V	B/W	8	11	10
EP96X26	3	PROJ	6	7	6.3	52V	B/W	8	11	10
EP96X30	3	PROJ	6	7	6.3	52V	B/W	8	11	10
EP96X31	3	PROJ	6	7	6.3	52V	B/W	8	11	10
EP96X32	3	PROJ	6	7	6.3	52V	B/W	8	11	10
ET44X100	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
EW96X12	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
EW96X13	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
EW96X14	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
EWX8	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
EWX9	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
EWX10	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
H4103	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
H4104	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
H4190	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
H8200P4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
H8362	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
H8397	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
H8398	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
H8399	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
H8455	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
H9155PB1	UA	SCOPE	1	2	6.3	68V	B/W	3	4	14
H9311	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
H9324	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
H9366	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
H9369	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
H9379	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
H9379A	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
H9386	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
HE234	6	VIDEO	3	4	11.6	20V	B/W	2	5	6
M01JGU9WB	UA	VIDEO	4	5	2.8	20V	B/W	7	6	3
M01JMK0WB*	UA	VIDEO	2	4	0.6	36V	B/W	2	1	3
M01JMK5WB*	UA	VIDEO	2	4	0.6	52V	B/W	2	1	3
M01JMK6WB*	UA	VIDEO	2	4	0.6	52V	B/W	2	1	3
M01JPG5WB*	UA	VIDEO	4	5	0.5	68V	B/W	4	6	3
M01JVD47WB*	UA	VIDEO	3	7	0.5	68V	B/W	3	5	6
M01JVV47WB*	UA	VIDEO	3	7	0.5	68V	B/W	3	5	6
M01JVY50WB*	UA	VIDEO	2	4	0.6	52V	B/W	2	1	3
M01JXN55WB*	UA	VIDEO	2	4	0.6	52V	B/W	2	1	3
M01JYZ60WB*	UA	VIDEO	2	4	0.63	52V	B/W	2	1	3
M01KBY65WB*	UA	VIDEO	2	4	0.63	52V	B/W	2	1	3
M01KGG007WB*	UA	VIDEO	3	7	.5	20V	B/W	3	5	6
M01KGG008WB*	UA	VIDEO	3	7	.6	20V	B/W	3	5	6
M01KKX07WB*	UA	VIDEO	3	7	0.6	20V	B/W	3	5	6
M02JVV48WB*	UA	VIDEO	3	7	0.5	68V	B/W	3	5	6
M03JBX8WW	UA	VIDEO	4	5	2.8	36V	B/W	2	3	6
M03JHB9WW	UA	VIDEO	4	5	2.8	36V	B/W	7	6	3
M03JKF0WW*	UA	VIDEO	4	5	0.5	68V	B/W	4	6	3
M03JMD00X*	UA	VIDEO	4	5	2.8	20V	B/W	4	3	6
M04JMC00X*	UA	VIDEO	4	5	2.8	20V	B/W	4	3	6
M04JUC00WB*	UA	VIDEO	2	4	0.6	52V	B/W	2	1	3
M04JZA10WB*	UA	VIDEO	2	4	0.6	36V	B/W	2	1	3
M04KAX07WB*	UA	VIDEO	4	5	0.5	68V	B/W	4	3	6

* DIRECTLY HEATED CATHODE - SEE OPERATING NOTES

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M10JAG00X	UA	VIDEO	1	9	0.5	68V	R	1	10	4
			2	8			G	8	10	4
			3	7			B	3	10	4
M10KGB007W	6	VIDEO	3	4	12	36V	B/W	1	5	6
M12P4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M13EAW0GR	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
M13JEE5WW	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M13JFL0GR	6	VIDEO	3	4	12	36V	B/W	2	5	6
M14JAT8WW	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
M14JDX5WW	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M14JDX6WW	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M14JYS15WW	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M14KJW007KC	6	VIDEO	3	4	12.0	20V	B/W	1	5	6
M16EAY0WB	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M16JLZ00X	UA	VIDEO	8	9	4.5	52V	R	5	7	4
							G	6	7	4
							B	10	7	4
M16JMR9WB	2	VIDEO	1	14	6.3	36V	B/W	6	7	5
M18JCB0WW	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M18JCB1WW	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M18JCB5WW	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M18JCB6LA	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M18JCB7WW	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M18JCB8WW	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M18JCB34GH	6	VIDEO	3	4	12	52V	B/W	2	5	6
M18JCW1GH	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M19JXX00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M19JXX01X	3	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	4	9	10
M19JLC00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M19JLC01X	3	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	4	9	10
M19KET00X	13/UA	VIDEO	4	5	6.3	36V	R	7	6	8
							G	9	6	8
							B	3	6	8
M19KET01X	13/UA	VIDEO	4	5	6.3	36V	R	7	6	8
							G	9	6	8
							B	3	6	8
M19KET20X	13/UA	VIDEO	4	5	6.3	36V	R	7	6	8
							G	9	6	8
							B	3	6	8
M19KET21X	13/UA	VIDEO	4	5	6.3	36V	R	7	6	8
							G	9	6	8
							B	3	6	8
M20EAZ0BE	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M20EAZ0WB	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M20EBA0WB	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M20EBA1WB	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M20JMP10X	UA	VIDEO	8	9	4.5	52V	R	5	7	4
							G	6	7	4
							B	10	7	4
M20JMP15X	UA	VIDEO	8	9	4.5	52V	R	5	7	4
							G	6	7	4
							B	10	7	4
M21JGV35WZ	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M22E829	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M22E8325	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M22E8327WB	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M22JCM00X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
M22JEA5WW	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M22JHD01X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M22JMM70X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M22JNB0GH	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M22JNB1GH	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M22JPT0WW	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M22JPT01WW	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M22JPT1WW	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M22JPT03WW	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M22JPT3WW	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M22JTV72X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
M23JAC26XX	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M23JBA00X	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
M23JBZ00X	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
M23JGD00X	13/UA	VIDEO	4	5	6.3	36V	R	7	6	8
							G	9	6	8
							B	3	6	8
M23JGD01X	13/UA	VIDEO	4	5	6.3	36V	R	7	6	8
							G	9	6	8
							B	3	6	8
M23JGD20X	13/UA	VIDEO	4	5	6.3	36V	R	7	6	8
							G	9	6	8
							B	3	6	8
M23JGD21X	13/UA	VIDEO	4	5	6.3	36V	R	7	6	8
							G	9	6	8
							B	3	6	8
M23JGE00X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
M23JGE01X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
M23JGE20X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
M23JGE21X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
M23JGV1GH	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M23JGV04GH	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M23JHU00X	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
M23JHU05X	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
M23JHU10X	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M23JHU15X	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
M23JVK10X	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
M23JVK11	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
M23JVK15X	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
M23KEY01X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M23KGV23XX	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
M24JCB00WW	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M24JCB10WY	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M24JCB15WW	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M24JCB30WY	6	VIDEO	3	4	12.0	36V	B/W	1	5	6
M24JMJ00X	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
M24KBX00X	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
M26JET60X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
M26JET61X	5/10	VIDEO	6	7	6.3	52V	R	8	9	10
							G	12	9	10
							B	3	9	10
M26JGB01X	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
M26JGX71X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M26JXK30X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
M26JXK31X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
M29AEL10X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29AEL60X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29AEM10X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29AEM60X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29AFD00WZ	6	VIDEO	3	4	12	68V	B/W	2	5	6
M29AFD01WZ	6	VIDEO	3	4	12	68V	B/W	2	5	6
M29EAA0WW	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M29EAA00X	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M29EAA2GH	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M29EAA2LM	6	VIDEO	3	4	12.0	52V	B/W	2	5	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M29EAA3LA	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M29EAA4WW	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M29EAB0GH	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M29EAB0WW	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M29EAB00X	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M29EEA2LM	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M29JAA00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JAA01X	3	VIDEO	6	7	6.3	52V	R	8	9	10
							G	12	9	10
							B	4	9	10
M29JAA21X	3	VIDEO	6	7	6.3	52V	R	8	9	10
							G	12	9	10
							B	4	9	10
M29JAB00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JAC00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JAC23X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JAD01X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
M29JAD31X	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
M29JAD32X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
M29JAL00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JAL01X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JAL10X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JAL11X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JAL60X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JAL61X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JAL70X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JAL71X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JAL80X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JAL81X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M29JAM00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JAM01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JAM10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JAM11X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M29JAM60X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M29JAM61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JAM70X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JAM71X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JAW00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JAW10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JAW11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JAW30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JAW40X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JAW41XB	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JAX60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JCA00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M29JCA30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JCA40X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M29JCA50X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JCA52A	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JCB05WW	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M29JCB10WY	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M29JCB30WY	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M29JCB60WY	6	VIDEO	3	4	12.0	36V	B/W	2	5	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M29JDQ55X	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
M29JEL00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JEL01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JEL20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JEL21X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JEU11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JGF00X	13/UA	VIDEO	4	5	6.3	36V	R G B	7 9 3	6 6 6	8 8 8
M29JGG00X	13/UA	VIDEO	4	5	6.3	36V	R G B	7 9 3	6 6 6	8 8 8
M29JGV05WW	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M29JGV6GR	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M29JGV8GR	6	VIDEO	3	4	12	68V	B/W	2	5	6
M29JGV66R	6	VIDEO	3	4	12	68V	B/W	2	5	6
M29JGX00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JGX10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JGX60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JGX70X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JGX80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHJ00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M29JHM00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHM03X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M29JHM10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHM84A	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHN00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M29JHN11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M29JHN50A	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHN50X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHN52A	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHN54X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHN61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHN80DE	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHN80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHN80XB	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHN81DE	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHN81X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHN91X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHY00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHY10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHY11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHY60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHY70X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHY71X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JHY80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29JJU11X	3	VIDEO	9	10	6.3	36V	R G B	8 6 11	5 5 5	7 7 7
M29JJU60X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M29JJU61X	3	VIDEO	9	10	6.3	36V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M29JJU70X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JJU71X	3	VIDEO	9	10	6.3	36V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JJW00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JKD60X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JKD70K	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JKK10X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JLB10X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JLB60X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JLB61X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JLB64X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JLB70X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JLB74X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JLB84X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JLB94X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JLX00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JLX70X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JMN81X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JMN81X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JMN82X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JMN83X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JNA00DD	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JNA00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M29JNA80X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JNE00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JNM50X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JNU50X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JNV10X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JNV82X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JNV83X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JNZ70X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JNZ80X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JPB00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JPB10X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JPB33X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JPB60X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JPB70X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JPB80X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JPB81X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JPB90X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JPK00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JPM61X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JPM71X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JPR00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M29JPR60X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JQC00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JQK00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JQM5WK	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M29JQM6WK	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M29JQM6WK	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M29JQU00X	9	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JQV00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JTH00W	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M29JTX23XX	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JUP23XX	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JUQ23XX	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29JUR23XX	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29KBN81X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29KDD00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29KDR00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29KDS10X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29KEY00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29KEY01X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29KEY20X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29KEY21X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29KFL00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29KFL01X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M29KFL20X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M29KFL21X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M29KFR00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29KFR01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29KFR30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29KFR31X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M29KJY00	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M30AFD00WZ	6	VIDEO	3	4	12	68V	B/W	2	5	6
M30JBC10X	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
M30JBC15X	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
M30JBC20X	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
M30JBC30X	4	VIDEO	1	8	6.3	68V	R G B	6 4 3	7 7 7	5 5 5
M30JCH3KD	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M30JHE3GH	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M30J JT8WW	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M30JNX00GH	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
M30JNX3LA	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M30JNX8LA	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M30JNX10GR	6	VIDEO	3	4	12.0	20V	B/W	2	5	6
M30JQX20WW	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M30KER10X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M30KER11X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M30KER20X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M30KER21X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M30KGK10X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M30KGK11X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M30KGK20X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M30KGK21X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M32EAA0X	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M32EAA1X	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M32EAA2X	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M32EAA3X	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M32EAA4X	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M32JCB05WW	6	VIDEO	3	4	12.0	68V	B/W	1	5	6
M32JCB10WQ	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M32JCB15WW	6	VIDEO	3	4	12.0	68V	B/W	1	5	6
M32JCB30WQ	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M32JEA35WY	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M32JFV00X	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M32JTF09WW	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M32JTF30GH	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
M32JTH00WW	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M33AAA02A	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M33AAA02X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M33AAA22A	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M33AAA22X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M33AAA24A	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M33AAA25A	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M33AAA26A	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M33AAA28A	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M33AAA52X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M33AAW00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M33AAW46X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M33AAW56X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M33ACD42	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M33ACL00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M33ACL99X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M33ACN40X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M33EAA2GH	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M34AEP60X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34AEP61X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34AFA60X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34AFA61X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34AFB60X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34AFB61X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34CRA60X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34CRA61X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34CRA70X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34CRA71X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34EAQ00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34EAQ10X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JAA04X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JAA05X	3	VIDEO	6	7	6.3	52V	R	8	9	10
							G	12	9	10
							B	4	9	10
M34JAC03X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JAC12X	3	VIDEO	6	7	6.3	52V	R	8	9	10
							G	12	9	10
							B	4	9	10
M34JAC23X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JAL00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JAL10X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JAL70X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JAM00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M34JAM10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JAM13X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JAM60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JAM70X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JAW01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JAW03X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JAW13X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JAW33X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JAW41XB	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JAW43X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JBF05X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JBK00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JBK10X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JBK11X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JBK13X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JBL09X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
M34JBL20X	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
M34JBL50X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JBL60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
M34JBL69X	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
M34JCA01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M34JCA03A	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JCA03DF	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JCA03X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JCA04X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JCA11D	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JCA13X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JCA30A	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JCA30X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JCA30X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JCA32X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JCA33A	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JCA33DD	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JCA34A	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JCA40X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JCA41X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JCJ03X	3	VIDEO	5	6	6.3	68V	R G B	11 8 10	7 7 7	9 9 9
M34JCK84B	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JCR20X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JCV00X03	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JDJ00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JDJ01X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JDJ03	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M34JDJ30X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JDJ40X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JDJ60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JDJ70X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JDJ73	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JDJ80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JDM03X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JDN21D	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JDR55X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JDT01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JDU03X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JDU13X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JDU30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JDU40X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JDV00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JDV12X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JDV13X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEF01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEF11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEF71X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEF80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M34JEF87X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEG13X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEG58X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEJ00X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
M34JEK00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEK01X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEK03X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEK04X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEK10X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEK11X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEK20X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEK21X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEK23X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEK24X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEK30X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEK31X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEL00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEL01X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEL10X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEL11X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEL20X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M34JEL21X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEL30X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEL31X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEM00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEM20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEM21X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEM30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEM31X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEN00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEN20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEN21X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEN30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEN31X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JEN80X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JEP00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JES01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JES09X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JFA09X	UA	VIDEO	6	7	6.3	52V	R G B	5 9 10	8 8 8	4 4 4
M34JFD11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JFE11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JFG03X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M34JFM21X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JFM22X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JFS01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JGH00X	3	VIDEO	9	10	6.3	36V	R G B	8 6 11	5 5 5	7 7 7
M34JGQ56X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JGS11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JGT10X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JGT60X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JGT62X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JGT70X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JHS20X	5/10	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	12 12 12
M34JHS21X	5/10	VIDEO	5	6	6.3	68V	R G B	10 9 8	11 11 11	12 12 12
M34JHV51X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JHZ01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JJC25X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JJV22X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JKD10X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JKD60X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JKD70X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JKD77X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JKD80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M34JKD82X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JKD87X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JKD90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JKS02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JLR03X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JLS16X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JLS39X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JLS56X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JLS57X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JLS58X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JLS59X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JLW00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JLW01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JLW03X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JLW40X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JLW80XH	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JMA00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JMA03X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JMA10X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JME00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JME03X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JME10X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M34JMH8WW	4	VIDEO	1	8	12.0	20V	B/W	7	2	3
M34JMN00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JMN02X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JMN62X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JMN70X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JMN72X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JMN92X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JMW00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JNC03X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JND12X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JNG13X	3	VIDEO	9	10	5.5	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JNP00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JNP10X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JNP80X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JNP89X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JNP93X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JNQ10X	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
M34JNQ15X	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
M34JNR00X	UA	VIDEO	6	7	6.3	68V	R	13	4	5
							G	11	4	5
							B	8	4	5
M34JNR20X	UA	VIDEO	6	7	6.3	68V	R	13	4	5
							G	11	4	5
							B	8	4	5
M34JNR21X	UA	VIDEO	6	7	6.3	68V	R	13	4	5
							G	11	4	5
							B	8	4	5
M34JNR30X	UA	VIDEO	6	7	6.3	68V	R	13	4	5
							G	11	4	5
							B	8	4	5

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M34JNR31X	UA	VIDEO	6	7	6.3	68V	R G B	13 11 8	4 4 4	5 5 5
M34JPB80X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JPC25X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JPM80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JPR00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JPR61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JPR70X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JPS00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JPS70X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JPS77X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JPS80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JPS82X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JPS87X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JPU13X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
M34JRT05X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JRW00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JRW01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JRW20X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JRW23X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JRW30X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JRW33X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M34JSC12X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JTC00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JTD00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JTE03X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JTT10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JTW90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JTY60X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
M34JUB30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JUN23XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JUP23XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JUP33X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JUR23XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JUS23X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JUSXX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JVN13X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34JVT22X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JVX80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JVX84X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JWH05X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JWK73X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34JWZ00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M34JWZ10X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JXC00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JYD56X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JYT70X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JYT77	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JYU87X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JZN22XX	3	VIDEO	6	7	6.3	52V	R	8	9	10
							G	12	9	10
							B	4	9	10
M34JZP80X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JZT80X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34JZU80X	3	VIDEO	9	10	6.3	36V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34KAM00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34KBE20X	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
M34KBE21X	5/10	VIDEO	5	6	6.3	52V	R	10	11	12
							G	9	11	12
							B	8	11	12
M34KBE30X	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
M34KBE31X	5/10	VIDEO	5	6	6.3	68V	R	10	11	12
							G	9	11	12
							B	8	11	12
M34KBG23XX	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34KBV50X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34KBV70	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34KBV70D	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34KBV70DM	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34KBV80X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M34KBV80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KBW83X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KCH10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KCH13X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KCX00X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KDD00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KDM11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KDN10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KDP10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KDP20	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KDQ10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KDU00XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KDU01XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KDU10XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KDU11XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KDV00XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KDV01XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KDV10XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KDV11XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KDW00XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KDW01XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M34KDW10XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KDW11XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KDY80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KDZ30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KFF80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KFG00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KFP30X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
M34KFQ11X	13/UA	VIDEO	4	5	6.3	52V	R G B	7 9 3	6 6 6	8 8 8
M34KFT00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KFT03X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KGD392	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KGJ30	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M34KHX00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KHY00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KJB20	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KJB21	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KJB30	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KJB31	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KJC20	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KJC21	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KJC30	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M34KJC31	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M34KJD20	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34KJD23	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34KJD26	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34KJE21	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34KJE23	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34KJE26	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34KJL00	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34KJL05	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M34KKE00	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M35JCX0GH	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M35JCY0GH	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M35JFP8WW	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M35JFP19YH	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M35JHQ5GR	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M35JJA4GR	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M35JJA4WH	3	VIDEO	6	7	6.3	68V	B/W	8	4	10
M35JIT8LA	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M35JIT13WY	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M35JIT32WL	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M35JLE3GW	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M35JLE8GW	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M35JLG3GR	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
M35JXT15WK	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M35JXT35YE	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M35JXT39GR	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M35JXT89CB	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M35JXU29WW	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M35JXZ16WW	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M35JYF35WW	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M36AEB00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36AEB22X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36AEB46X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36AEB98X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36AEB99X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M36AES60X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36AEW11	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36JCA00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36JGB01X	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
M36JGK00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36JGK30X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36JGK90X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36JGL00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36JGL30X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36JGL80X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36JGL90X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36JJQ00X	13/UA	VIDEO	4	5	6.3	52V	R	7	6	8
							G	9	6	8
							B	3	6	8
M36JMU0WW	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M36JMV0WW	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M36JPC20X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36JPN3YG	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
M36JPN6WW	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
M36JPN35YG	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
M36JPV5WW	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M36JPV006	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M36JRM05WK	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M36JRM15WL	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M36JSB70X	13/UA	VIDEO	4	5	6.3	36V	R	7	6	8
							G	9	6	8
							B	3	6	8
M36JSJ16WL	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M36JUT00WW	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M36JUJ00WW	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
M36JUV00WW	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M36JUY00XX	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36JUY01XX	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M36JUY20X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M36JUY21XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36JVE90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M36JVL23XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36JVM23X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36JVN13X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36JVN23XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36JWY00XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36JWY01XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36JWY02X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36JWY03X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36JWY20XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36JWY21XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36JWY22X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36JWY23X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36JXG23X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36JXY15WW	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M36JXY35CA	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M36JXZ05WK	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M36JXZ05WX	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M36JXZ15WW	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M36JYW89X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M36JYX89X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M36JYY89X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M36KAW00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M36KBQ00XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KBQ01XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KBQ02X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KBQ03X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KBQ20XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KBQ21XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KBQ22X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KBQ23X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KBR00XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KBR01XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KBR20XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KBR21XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KEK00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KEK01X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KEK20X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KEK21X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KGF20X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KGF21X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KGT50	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KHF189	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M36KHG189X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M36KKJ50X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M36KKW24	3	VIDEO	9	10	6.3	36V	R G B	8 6 11	5 5 5	7 7 7
M36KKW26	3	VIDEO	9	10	6.3	36V	R G B	8 6 11	5 5 5	7 7 7
M36KKY20X	3	VIDEO	9	10	6.3	36V	R G B	8 6 11	5 5 5	7 7 7
M36KKY23X	3	VIDEO	9	10	6.3	36V	R G B	8 6 11	5 5 5	7 7 7
M36KKY26X	3	VIDEO	9	10	6.3	36V	R G B	8 6 11	5 5 5	7 7 7
M38JAB00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M38JAB51	3	VIDEO	9	10	6.3	36V	R G B	8 6 11	5 5 5	7 7 7
M38JAC51X	3	VIDEO	9	10	6.3	36V	R G B	8 6 11	5 5 5	7 7 7
M38JEK00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M38JEK01X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M38JEK30X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M38JEK31X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M38JFJ35X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M38JFJ36X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M38JFJ37X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M38JFJ39X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M38JFJ47X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M38JFJ49K	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M38JFJ57X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M38JFJ67X	3	VIDEO	9	10	6.3	68V	R G B G B	8 6 6 11 11	5 5 5 5 5	7 7 7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M38JGN00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JGN01X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JGN88X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JKS02X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JLT00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JLT01X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JLT71X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JLU37X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JLU39X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JLU47X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JLU49X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JLU57X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JLU59X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JLU67X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JLU69X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JSS36X	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JUN04XX	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JUP04XX	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JUR04XX	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JVZ81X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38JWF35WJ	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M38JZS74XX	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M38KBG04XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M38KBG26XX	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M38KC381X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M38KCE81X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M38KEM81X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M38KFY391X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M38KKH54X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M41ECG0GN	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M41ECG0WD	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M41JGK00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M41JKM0WW	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M41JKN0WW	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M41JLF0GA	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
M41JLF5GA	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
M41JNY5WW	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M41JPV16WW	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M41JPX00WW	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M41JPX0WW	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M41JPY00WW	4	VIDEO	1	8	12.0	68V	B/W	7	2	3
M41JPY0WW	4	VIDEO	1	8	12	36V	B/W	7	2	3
M41JQN5WK	4	VIDEO	1	8	12.0	68V	B/W	7	2	3
M41JQN6WK	4	VIDEO	1	8	12.0	68V	B/W	7	2	3
M41JQY00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M41JRM06WK	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M41JRM16WK	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M41JSD15X	UA	VIDEO	5	6	6.3	36V	R G B	12 10 8	11 7 4	9 9 9
M41JSD16X	UA	VIDEO	5	6	6.3	36V	R G B	12 10 8	11 7 4	9 9 9
M41JSP15WL	3	VIDEO	6	7	6.3	68V	B/W	8	4	10
M41JTG15X	UA	VIDEO	5	6	6.3	36V	R G B	12 10 8	11 7 4	9 9 9
M41JUA00X	3	VIDEO	9	10	6.3	36V	R G B	8 6 11	5 5 5	7 7 7
M41JUT00WW	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M41JU00WW	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
M41JUV00WW	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M41JUX00X	3	VIDEO	9	10	6.3	36V	R G B	8 6 11	5 5 5	7 7 7
M41JUY00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M41JUY10X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41JUY11X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41JUY20X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41JUY21X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41JUYT00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41JVF20X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41JXT15WK	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M41JXU15WK	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M41JXZ016	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M41JXZ16WW	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M41KAH06WL	3	VIDEO	6	7	6.3	68V	B/W	8	4	10
M41KBH00X	UA	VIDEO	10	11	6.3	52V	R	9	6	8
							G	7	6	8
							B	12	6	8
M41KED00X	3	VIDEO	9	10	6.3	20V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41KED01X	3	VIDEO	9	10	6.3	20V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41KED10X	3	VIDEO	9	10	6.3	20V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41KED11X	3	VIDEO	9	10	6.3	20V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41KEN10X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41KEN11X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41KEN20X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41KEN21X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41KEX10X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41KEX11X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41KEX20X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41KEX21X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M41KJF13	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41KJF16	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41KJF23	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41KJF26	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M41KKL50X	UA	VIDEO	10	11	6.3	52V	R	9	6	8
							G	7	6	8
							B	12	6	8
M43ACR22X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M43ACR24X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M45JTP06WL	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M45JXE06WL	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M45JXE16WL	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M45JYG06WL	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M45JYH016	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M45JYH16WL	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M45KEP06WL	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M45KKR06WL	3	VIDEO	6	7	6.3	68V	B/W	8	4	10
M46JGK00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M46JGK30X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M46JGK91X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M47EAA9WS	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M47JXT15WK	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M48AAW00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48ACJ00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JAC00X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JBR00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JBY02X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JBY72X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JCP11X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JCQ61X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M48JCR21X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JDG40X	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
M48JDJ00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JDJ01X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JDJ02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JDJ10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JDJ70X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JDJ80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JDJ84X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JDM12X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JDM31X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JDU02X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JDU11X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JDV61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JEF01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JEF03X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JEF04X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JEF73X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JEF74X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JEG19X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JEG27X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M48JEG33X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JEG35X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JEG37X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JFB09X	UA	VIDEO	6	7	6.3	52V	R	5	8	4
							G	9	8	4
							B	10	8	4
M48JFB35	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4
M48JFB49X	UA	VIDEO	6	7	6.3	52V	R	5	8	4
							G	9	8	4
							B	10	8	4
M48JFD11X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JFJ24X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JFJ32X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JFJ34X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JFJ36X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JFJ50X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JFJ54X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JFJ55X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JFJ58X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JFK59X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JFR08X	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
M48JFW08X	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4
M48JG139X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JGJ00X	2	VIDEO	1	14	6.3	36V	R	2	3	4
							G	6	7	5
							B	11	12	13
M48JGN00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48JGN02X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M48JGN04X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JGN12X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JGN42X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JGN44X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JGN72X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JGN74X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JGN80X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JGP57X	UA	VIDEO	6	7	6.3	68V	R G B	5 9 10	8 8 8	4 4 4
M48JGQ17X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JGQ27X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JGQ33X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JGQ35X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JGQ39X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JHW20X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JHW22X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48J JV21X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JKE8WW	2	VIDEO	1	14	6.3	20V	B/W	6	7	5
M48JKE9WW	2	VIDEO	1	14	6.3	20V	B/W	6	7	5
M48JKT21X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JKT22X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JLJ11X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JLJ11X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2	
M48JLJ12X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLJ30X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLJ31X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLJ32X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLK20X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLK22X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLM9WB	2	VIDEO	1	14	6.3	20V	B/W	6	7	5	-
M48JLMF11X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLT00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLT01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLT02X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLT03X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLT04X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLU07X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLU17X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLU27X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLU37X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLU39X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLU47X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLU57X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLU67X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7	-
M48JLU87X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7	-

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M48JMF11X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JMG21X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JNF22X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JNH11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JNJ22X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JNJ23X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JNK22X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M48JQD20X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JQD21X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JQD22X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JQZ00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JRA00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JRB00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JRC00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JRF08X	2	VIDEO	1	14	6.3	52V	R G B	2 6 11	3 7 12	4 5 13
M48JSR00X	UA	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JSS36X	UA	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JSS59X	UA	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JST00X	UA	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JSU56X	UA	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M48JSU59X	UA	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2	
M48JTK11X	3	VIDEO	9	10	6.3	52V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JTQ02X	3	VIDEO	9	10	6.3	68V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JTQ32X	3	VIDEO	9	10	6.3	68V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JTQ82X	3	VIDEO	9	10	6.3	68V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JTU22X	3	VIDEO	9	10	6.3	52V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JUD37X	3	VIDEO	9	10	6.3	68V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JUN04XX	3	VIDEO	9	10	6.3	52V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JUP04XX	3	VIDEO	9	10	6.3	52V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JUR04XX	3	VIDEO	9	10	6.3	52V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JXA11X	3	VIDEO	9	10	6.3	52V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JXB11X	3	VIDEO	9	10	6.3	52V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JXD11X	3	VIDEO	9	10	6.3	52V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JXD32X	3	VIDEO	9	10	6.3	52V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JYE32X	3	VIDEO	9	10	6.3	68V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JYJ80X	3	VIDEO	9	10	6.3	68V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JZB10X	3	VIDEO	9	10	6.3	68V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JZF22X	3	VIDEO	9	10	6.3	68V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JZJ11X	3	VIDEO	9	10	6.3	52V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48JZP56X	UA	VIDEO	9	10	6.3	52V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48KAQ56X	UA	VIDEO	9	10	6.3	52V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	
M48KAY12X	UA	VIDEO	9	10	6.3	52V	R	8	5	7	-
							G	6	5	7	
							B	11	5	7	

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M48KAZ12X	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KBA22X	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KBB22X	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KBC22X	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KBD22X	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KBJ04XX	UA	VIDEO	10	11	6.3	52V	R	9	6	8
							G	7	6	8
							B	12	6	8
M48KBJ26X	UA	VIDEO	10	11	6.3	52V	R	9	6	8
							G	7	6	8
							B	12	6	8
M48KBK04XX	UA	VIDEO	10	11	6.3	52V	R	9	6	8
							G	7	6	8
							B	12	6	8
M48KBK26X	UA	VIDEO	10	11	6.3	52V	R	9	6	8
							G	7	6	8
							B	12	6	8
M48KBL04XX	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KBL26XX	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KBS12X	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KBT22X	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KBU22X	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KDA56X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KDA56X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KFD26X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KFK73X	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KFR00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KFR01X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KFR20X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M48KFR21X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M48KHS494X	UA	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M49JBD05X	5/10	VIDEO	6	7	6.3	68V	R	12	4	5
							G	10	4	5
							B	8	4	5
M49JBD05Y	UA	VIDEO	6	7	6.3	68V	R	13	4	5
							G	11	4	5
							B	8	4	5
M49JBD15X	UA	VIDEO	6	7	6.3	68V	R	13	4	5
							G	11	4	5
							B	8	4	5
M49JBD16X	UA	VIDEO	6	7	6.3	68V	R	13	4	5
							G	11	4	5
							B	8	4	5
M49JBD20X	UA	VIDEO	1	14	6.3	68V	R	7	6	13
							G	5	3	13
							B	2	12	13
M49JBD30X	UA	VIDEO	1	14	6.3	68V	R	7	6	13
							G	5	3	13
							B	2	12	13
M49JBD35X	UA	VIDEO	6	7	6.3	68V	R	13	4	5
							G	11	4	5
							B	8	4	5
M49JCZ0WW	UA	SCOPE	1	14	6.3	52V	B/W	5	3	13
M49JDA00X	UA	VIDEO	1	14	6.3	68V	R	7	6	13
							G	5	3	13
							B	2	12	13
M49JDA00Y	UA	VIDEO	1	14	6.3	68V	R	7	6	13
							G	5	3	13
							B	2	12	13
M49JJP20X	UA	VIDEO	6	7	6.3	68V	R	13	4	5
							G	11	4	5
							B	8	4	5
M49JJP21X	UA	VIDEO	6	7	6.3	68V	R	13	4	5
							G	11	4	5
							B	8	4	5
M49JJP30X	UA	VIDEO	6	7	6.3	68V	R	13	4	5
							G	11	4	5
							B	8	4	5
M49JJP31X	UA	VIDEO	6	7	6.3	68V	R	13	4	5
							G	11	4	5
							B	8	4	5
M49KBP20X	UA	VIDEO	6	7	6.3	68V	R	13	4	5
							G	11	4	5
							B	8	4	5
M49KBP21X	UA	VIDEO	6	7	6.3	68V	R	13	4	5
							G	11	4	5
							B	8	4	5
M49KFN21X	UA	VIDEO	5	6	6.3	36V	R	12	11	9
							G	10	7	9
							B	8	4	9
M49KGH20	UA	VIDEO	7	8	6.3	68V	R	12	6	5
							G	11	9	5
							B	10	13	5
M49KHH15X	UA	VIDEO	5	6	6.3	36V	R	12	11	9
							G	10	7	9
							B	8	4	9
M49KHH16X	UA	VIDEO	5	6	6.3	36V	R	12	11	9
							G	10	7	9
							B	8	4	9
M51JFC00X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M51JFC30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M51JFC60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M51JGA01X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M51JGK00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M51JGK30X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M51JGK39X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M51JGK90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M51JKW00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M51JML01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M51JPV005	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M51JPV06WL	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M51JSE60X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M51JSE70X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M51JTZ91X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
M51JTZ95X	13/UA	VIDEO	4	5	6.3	68V	R G B	7 9 3	6 6 6	8 8 8
M51JVR00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M51JVR10X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M51JWD00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M51JWD10X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M51JWD11X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M51JWD20X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M51JWD21X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M51JZQ11X	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51JZR22X	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KAN00	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KAN23XX	UA	VIDEO	10	11	6.3	52V	R	9	6	8
							G	7	6	8
							B	12	6	8
M51KAN50	UA	VIDEO	10	11	6.3	52V	R	9	6	8
							G	7	6	8
							B	12	6	8
M51KBM49X	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KCY11X	UA	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KDX00XX	3	VIDEO	9	10	6.3	36V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KDX01XX	3	VIDEO	9	10	6.3	36V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KDX10XX	3	VIDEO	9	10	6.3	36V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KDX11X	3	VIDEO	9	10	6.3	36V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KEC00X	3	VIDEO	9	10	6.3	36V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KEC01X	3	VIDEO	9	10	6.3	36V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KEC10X	3	VIDEO	9	10	6.3	36V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KEC11X	3	VIDEO	9	10	6.3	36V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KEL10X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KEL11X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KEL20X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KEL21X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M51KFE20XX	UA	VIDEO	10	11	6.3	52V	R	9	6	8
							G	7	6	8
							B	12	6	8
M51KFM70X	UA	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M51KFW80X	UA	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M51KGO116	UA	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M51KGR118	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M51KHB70X	UA	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M51KHC70X	UA	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M51KHD80X	UA	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M51KHE80X	UA	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M51KHL199	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M56JHX30X	3	VIDEO	9	10	6.3	36V	R G B	8 6 11	5 5 5	7 7 7
M56JHX91X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M61KEW05X	UA	VIDEO	6	7	6.3	36V	R G B	13 11 8	12 10 9	5 5 5
M61KEX05X	UA	VIDEO	6	7	6.3	68V	R G B	13 11 8	4 4 4	5 5 5
M61KEX15X	UA	VIDEO	6	7	6.3	68V	R G B	13 11 8	4 4 4	5 5 5
M63JEZ00X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M63JRG00X	2	VIDEO	1	14	6.3	68V	R G B	2 6 11	3 7 12	4 5 13
M63JUA21X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M63JUA25X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M63JUA27X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M63JUA28X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M63JUA91X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M63JUA95X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M63JUA96X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M63JUA97X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M63JUA98X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M65JUA91X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M66JHX00X	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M66JHX01X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M66JHX30X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M66JHX32X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M66JHX90X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M66JKA11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA20X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA21	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA21X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA24	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA24X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA25	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA25X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA26	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA26X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA27	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA27X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA28X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M68JUA29X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA51	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA51X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA58X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA91X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA95X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JUA128	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JVU11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JVU31X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JXR91	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M68JXR191	3	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M68JZK21X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JZK51X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68JZK81X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68KCW11X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M68KFB30X	UA	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M68KFB80X	UA	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M68KFU15X	UA	VIDEO	9	10	6.3	52V	R G B	8 6 11	5 5 5	7 7 7
M68KJG13	UA	VIDEO	10	11	6.3	68V	R G B	9 7 12	6 6 6	8 8 8
M68KJQ11X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M75KCG05X	UA	VIDEO	6	7	6.3	36V	R G B	13 11 8	12 10 9	5 5 5

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M75KEU05GH	UA	VIDEO	6	7	6.3	68V	B/W	11	4	5
M75KEU05MS	UA	VIDEO	6	7	6.3	68V	B/W	11	4	5
M75KEU05WW	UA	VIDEO	6	7	6.3	68V	B/W	11	4	5
M75KEV05WW	UA	VIDEO	6	7	6.3	68V	B/W	11	4	5
M76JUA91X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78JUA21Z	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78JUA25X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78JUA26X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78JUA27X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78JUA28X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78JUA91X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78JUA95X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78JUA98X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78JWW11X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78JXR21X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78JXR25X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78JXR91X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78JXR121	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78JXR125	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78JXR125X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78KEH60X	UA	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M78KHM191	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M79JAM61X	3	VIDEO	9	10	6.3	52V	R	8	5	7
							G	6	5	7
							B	11	5	7
M79JWW31X	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M79KCW11X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M79KHV191	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M89JYM11X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M89JYM31X	UA	VIDEO	10	11	6.3	68V	R G B	9 7 12	6 6 6	8 8 8
M89JYM61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M89JYM81X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M89JZM11X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M89JZM61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M89KCW11X	UA	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M89KCW31	UA	VIDEO	10	11	6.3	68V	R G B	9 7 12	6 6 6	8 8 8
M89KKU11X	UA	VIDEO	10	11	6.3	68V	R G B	9 7 12	6 6 6	8 8 8
M89KKV61X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M101JXF81X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M103JWX31X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M103JWX41X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M103JWX45X	3	VIDEO	9	10	6.3	68V	R G B	8 6 11	5 5 5	7 7 7
M129P39	UA	VIDEO	1	12	6.0	20V	B/W	11	2	10
M1409P1	UA	SCOPE	1	14	6.3	68V	B/W	5	3	13
M17-10	4	VIDEO	1	8	11.5	36V	B/W	7	2	3
M17-12	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M17-14LX	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M17-15	4	VIDEO	1	8	11.5	36V	B/W	7	2	3
M17-18W	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
M21-11	4	VIDEO	1	8	11.0	36V	B/W	7	2	3
M21-12	4	VIDEO	1	8	11.0	36V	B/W	7	2	3
M21-13W	4	VIDEO	1	8	11.0	36V	B/W	7	2	3
M21-14	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
M21-15	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M23-17W	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M28-11	4	VIDEO	1	8	11.5	36V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M28-12	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M28-13	4	VIDEO	1	8	11.5	36V	B/W	7	2	3
M36-11W	4	VIDEO	1	8	11.0	36V	B/W	7	2	3
M36-12	4	VIDEO	1	8	11.5	52V	B/W	7	2	3
M36-15	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M36-16W	4	VIDEO	1	8	11.0	36V	B/W	7	2	3
M43-12	4	VIDEO	1	8	11.5	52V	B/W	7	2	3
M43-13	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
M59-25	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M11405P39AU	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M14-100	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M17-121	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M17-140W	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M17-141W	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M17-152	4	VIDEO	1	8	11.5	36V	B/W	7	2	3
M19-100	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M23-110	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M23-111	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M23-112	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M23-113	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M23-114	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
M23-130GH	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M23-131	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M23-190	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M23-290	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M24-100	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M24-120	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M24-121	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M24-190	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M24-192	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M24-290	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M24-300	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
M24-301	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
M24-302	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
M24-303	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
M24-304	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
M24-305	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
M24-306	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M24-307	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M24-308	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M24-310	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M28-131	4	VIDEO	1	8	11.5	36V	B/W	7	2	3
M28-132	4	VIDEO	1	8	11.5	36V	B/W	7	2	3
M28-133	4	VIDEO	1	8	11.5	36V	B/W	7	2	3
M31-100	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
M31-101	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
M31-110	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M31-120	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M31-130	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M31-142	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M31-150	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M31-151	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M31-182	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M31-184	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M31-185	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M31-190	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M31-191	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M31-192	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M31-210	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M31-212	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M31-213	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M31-290	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M31-312	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M31-313	4	VIDEO	1	8	6.3	52V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M31-314	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M31-315	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M31-320	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M31-325	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M31-326	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M31-330	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
M31-331	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
M31-332	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
M31-333	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
M31-334	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
M31-335	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M31-336	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M31-338	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M31-340	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
M31-342	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M31-344	6	VIDEO	3	4	11.8	52V	B/W	2	5	6
M31-346	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M31-350	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M31-354	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M31-362	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M31-364	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
M36-121	4	VIDEO	1	8	11.5	52V	B/W	7	2	3
M36-122	4	VIDEO	1	8	11.5	52V	B/W	7	2	3
M36-141	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
M36-142	UA	VIDEO	1	12	6.3	36V	B/W	11	2	10
M36-170	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
M36-180	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
M37-102X	UA	VIDEO	6	7	6.3	68V	R	5	8	4
							G	9	8	4
							B	10	8	4
M37-110	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M37-120	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
M38-100	4	VIDEO	1	8	11.5	52V	B/W	7	2	3
M38-101	4	VIDEO	1	8	11.5	36V	B/W	7	2	3
M38-102	4	VIDEO	1	8	11.5	36V	B/W	7	2	3
M38-103	4	VIDEO	1	8	11.5	36V	B/W	7	2	3
M38103WA	4	VIDEO	1	8	11.2	36V	B/W	7	2	3
M38-104	4	VIDEO	1	8	11.5	36V	B/W	7	2	3
M38-105	4	VIDEO	1	8	11.5	36V	B/W	7	2	3
M38-106	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M38-110	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
M38-111	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M38-112	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M38-113	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M38-120	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M38-121	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M38-122	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M38-123	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M38-126	4	VIDEO	1	8	6.3	20V	B/W	7	2	3
M38-127	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M38-128	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M38-142	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M38-210	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M38-290	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M38-312	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M38-313	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M38-314	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M38-315	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M38-320	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M38-327	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M38-328	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M38-329	4	VIDEO	1	8	6.3	68V	B/W	7	2	3

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
M38-330	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M38-331	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M38-332	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M38-334	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
M38-336	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M38-338	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M38-342	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M38-370R	2	VIDEO	1	14	6.3	52V	B/W	13	5	11
M38-390R	2	VIDEO	1	14	6.3	52V	B/W	13	5	11
M43-150	UA	VIDEO	1	12	6.3	52V	B/W	11	2	10
M44-110	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M44-120	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M44-123	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M44-124	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M44-127	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M44-210	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M50-102	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M50-110	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
M50-120	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M50-210	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M61-120	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M61-210	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
M65-110	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
M38-3301	4	VIDEO	1	8	6.3	68V	B/W	7	2	3
MG13-38	UA	VIDEO	1	12	6.3	20V	B/W	11	2	10
MM28-12	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
MN1253	6	VIDEO	3	4	11.5	20V	B/W	2	5	6
MN1405P4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
MN1416	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
MP1405P4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
MT129T5UB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
MT1289	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
MT1299SLB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
MT1299ZAB22	3	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
MT2019	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
MU13-38	UA	VIDEO	1	12	6.3	20V	B/W	11	2	10
MV13-38	6	VIDEO	3	4	6.3	68V	B/W	2	5	6
MY13-38	UA	VIDEO	1	12	6.3	20V	B/W	11	2	10
N0859	4	VIDEO	1	8	12.0	52V	B/W	7	2	3
N5042	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
P841	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P842	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P843	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P844	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P846	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P847	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P8000	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
P8001	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
P8003	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
P8005	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
P8021	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P8023	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P8038	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P8130	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
P8132	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
P8160	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
P8400	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
P8401	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
R10AP4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R10BP4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R10CP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R10CPWH	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R10DP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R12AP4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R12BP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R12CP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R12CPDB	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R12DP31	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R12DP39	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R12EP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R12FP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
R12GP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
R12HP4	6	VIDEO	3	4	11.0	52V	B/W	2	5	6
R12JP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R12KP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
R12SP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R14AP4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R14CP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R15AP4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
R15CP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
R15HP4	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
R30AP4	6	VIDEO	3	4	6.0	36V	B/W	2	5	6
R40AP4	6	VIDEO	3	4	6.0	36V	B/W	2	5	6
R50AP4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R55AP4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R55BP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R55CP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R55DP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R55EP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R55FP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R55VP4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R55ZP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R60AP4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R75AP4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R80AP4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R90BP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R90CP4	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
R590AP4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5109B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5110B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5112B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5117B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5119B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5120B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5121B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5122B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5123B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5124B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5125B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5126B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5127B4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
R5130B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5132B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5133B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5134B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5135B4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
R5136B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5137B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
R5138B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5141B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5143B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5146B4	6	VIDEO	3	4	11.0	36V	B/W	2	5	6
R5147B4	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
R5301B4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
R5303B4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
R5305B4	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
S4097	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
S37-554X	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
SA5XPSA43	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
SC3819	2	VIDEO	1	14	6.3	52V	B/W	13	5	11
SC5595	6	VIDEO	3	4	12.6	52V	B/W	2	5	6
SC5902	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
SC5904	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
SC5912B	2	VIDEO	1	14	6.3	52V	B/W	13	5	11
SD28	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
SD30	4	VIDEO	1	8	6.3	52V	R	6	7	5
							G	4	7	5
							B	3	7	5
SD31	4	VIDEO	1	8	6.3	52V	R	6	7	5
							G	4	7	5
							B	3	7	5
SD37	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
SD38	4	VIDEO	1	8	6.3	52V	R	6	7	5
							G	4	7	5
							B	3	7	5
SD46	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
SD49	5/10	VIDEO	6	7	6.3	68V	R	12	4	5
							G	10	4	5
							B	8	4	5
SD56	4	VIDEO	1	8	6.3	52V	R	6	7	5
							G	4	7	5
							B	3	7	5
SD57	5/10	VIDEO	6	7	6.3	68V	R	12	4	5
							G	10	4	5
							B	8	4	5
SD59	UA	VIDEO	3	4	0.65	68V	R	3	2	5
			1	6			G	1	2	5
			8	9			B	8	2	5
SD61	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5
SD78	4	VIDEO	1	8	6.3	52V	R	6	7	5
							G	4	7	5
							B	3	7	5
SD82	4	VIDEO	1	8	6.3	52V	R	6	7	5
							G	4	7	5
							B	3	7	5
SD88	4	VIDEO	1	8	6.3	52V	R	6	7	5
							G	4	7	5
							B	3	7	5
SD94	4	VIDEO	1	8	6.3	52V	R	6	7	5
							G	4	7	5
							B	3	7	5
SD97	4	VIDEO	1	8	6.3	68V	R	6	7	5
							G	4	7	5
							B	3	7	5

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
SD98	4	VIDEO	1	8	6.3	52V	R	6	7	5
							G	4	7	5
							B	3	7	5
SD102	UA	PROJ	5	6	6.3	52V	B/W	9	3	4
SD116	UA	PROJ	6	7	6.3	68V	B/W	10	4	5
SD130	UA	PROJ	6	7	6.3	68V	B/W	10	4	5
SD142	1	VIDEO	5	6	6.3	52V	B/W	9	3	4
SD174	UA	PROJ	6	7	6.3	52V	B/W	10	4	5
SD186	UA	PROJ	6	7	6.3	68V	B/W	10	4	5
SD208	UA	PROJ	6	7	6.3	68V	B/W	10	4	5
SE4D	UA	VIDEO	3	4	6.3	68V	B/W	2	1	8
SF17	4	VIDEO	1	8	2.68	52V	B/W	7	3	2
SF21	4	VIDEO	1	8	2.34	36V	B/W	7	3	2
ST1419	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
ST2019	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
ST2029	2	VIDEO	1	14	6.3	52V	R	2	3	4
							G	6	7	5
							B	11	12	13
ST4500	6	VIDEO	3	4	12	36V	B/W	2	5	6
ST4543	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
ST4716	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
ST4730	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
ST4748	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
ST5427	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
ST5440	6	VIDEO	3	4	12	52V	B/W	2	5	6
ST5448	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
ST5449	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
ST5452	6	VIDEO	3	4	12	52V	B/W	2	5	6
ST5453	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
ST5454	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
ST5470	6	VIDEO	3	4	12	52V	B/W	2	5	6
ST5488	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
ST5490	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
ST5493	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
ST5494	6	VIDEO	3	4	12	52V	B/W	2	5	6
ST5495	6	VIDEO	3	4	6.3	52V	B/W	2	5	6
ST5497	6	VIDEO	3	4	12	52V	B/W	2	5	6
ST5652	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
ST5904	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
ST6020	5/10	VIDEO	6	7	6.3	68V	R	8	9	10
							G	12	9	10
							B	3	9	10
ST6105	6	VIDEO	3	4	12	36V	B/W	2	5	6
ST6107	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
ST6111	6	VIDEO	3	4	12	52V	B/W	2	5	6
ST6112B	4	VIDEO	1	8	12.6	52V	B/W	7	2	3
ST6118	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
ST6122	6	VIDEO	3	4	12.0	36V	B/W	2	5	6
ST6124	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
ST6127	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
ST6132	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
ST6138	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
ST6139	4	VIDEO	1	8	12.6	52V	B/W	7	2	3
ST6140	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
ST6143	2	VIDEO	1	6	6.3	36V	R	13	12	11
							G	2	14	7
							B	4	3	5

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
ST6144	2	VIDEO	1	14	6.3	52V	B/W	13	5	11
ST6148C	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
ST6149B	2	VIDEO	1	14	6.3	52V	B/W	13	5	11
ST6152	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
ST6153	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
ST6158	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
ST6162	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
ST6165	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
ST6168	6	VIDEO	3	4	12.0	52V	B/W	2	5	6
ST8170	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
ST6172	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
ST6173	4	VIDEO	1	8	12.0	36V	B/W	7	2	3
ST6183	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
ST6191	2	VIDEO	1	14	6.3	68V	B/W	13	5	11
ST6197	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
ST6198	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
ST6199	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
ST6600	6	VIDEO	3	4	12.0	68V	B/W	2	5	6
T31-14	6	VIDEO	3	4	4.2	20V	B/W	2	5	6
T40-06	4	VIDEO	1	8	4.2	52V	B/W	7	2	3
T40-21	6	VIDEO	3	4	4.2	52V	B/W	2	5	6
T47-08	4	VIDEO	1	8	6.3	52V	B/W	7	2	3
T47-11	4	VIDEO	1	8	4.2	52V	B/W	7	2	3
T47-16	4	VIDEO	1	8	4.2	52V	B/W	7	2	3
T51-56	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
T67-14	2	VIDEO	1	14	6.3	68V	R	2	3	4
							G	6	7	5
							B	11	12	13
TV8000	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
V801	6	VIDEO	3	4	6.3	36V	B/W	2	5	6
VA66V-481X	9	VIDEO	9	10	6.3	68V	R	8	5	7
							G	6	5	7
							B	11	5	7
VA37-472X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
VA42-472X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
VA51-469X	13/UA	VIDEO	4	5	6.3	68V	R	7	6	8
							G	9	6	8
							B	3	6	8
VBE2280	6	VIDEO	3	4	6.0	20V	B/W	2	5	6
VT0625B22	2	PROJ	1	14	6.3	52V	B/W	6	7	5
VT0629B22	3	PROJ	5	6	6.3	52V	B/W	11	3	10
VT0700B22	2	PROJ	1	14	12.0	52V	B/W	6	7	5
VT0705B22	2	PROJ	1	14	6.3	52V	B/W	6	7	5
VT0720B22	2	PROJ	1	14	6.3	52V	B/W	6	7	5
VT0725B22	2	PROJ	1	14	6.3	52V	B/W	6	7	5
VT0729B22	3	PROJ	5	6	6.3	52V	B/W	11	3	10
VT1725B22	2	PROJ	1	14	6.3	52V	B/W	6	7	5
VT01729B22	3	PROJ	5	6	6.3	52V	B/W	11	3	10
VT1729B22	3	PROJ	5	6	6.3	52V	B/W	11	3	10
VT2729B22	3	PROJ	5	6	6.3	52V	B/W	11	3	10
VT4729B22	3	PROJ	5	6	6.3	52V	B/W	11	3	10
XQ1020	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
XQ1021	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
XQ1023	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
XQ1024	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
XQ1025	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
XQ1026	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
XQ1070	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ1073	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ1075	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ1120	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ1121	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ1240	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ1410	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
XQ1413	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
XQ1415	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ1427	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
XQ2070	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ2073	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ2075	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ2173	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ2175	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ2177	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ2427	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
XQ3427	6	VIDEO	3	4	6.3	36V	B/W	1	5	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
Camera Pickup Tubes										
20PE13	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
20PE19	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4075	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4076	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
4097	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4102	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4387	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4388	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4389	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4532	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
4543	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
4804	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
4810	UA	VIDEO	1	8	6.3	36V	B/W	7	2	6
4833	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4848	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4890	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
4904	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
4911	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
7038	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
7262	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
7697	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
7735	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8134	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8480	UA	VIDEO	1	8	6.3	36V	B/W	7	2	6
8507	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8541	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8572	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8625	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8628	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8638	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
8823	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
8844	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
9901	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
9915	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4379	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4380	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4386	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4390	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4391	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4396	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4398	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4399	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4532	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4592	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
BC4593	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
BC4594	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
BC4809	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4892	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4893	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4894	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4908	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4909	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4917	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4922	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4923	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4924	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC4927	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4937	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
BC4992	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
BC4993	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
BC4994	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
BC7735	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC8134	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
BC8480	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC8507	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
BC8541	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
CT2222	UA	VIDEO	3	10	6.5	20V	B/W	8	2	7
CT2222	UA	VIDEO	3	10	6.5	20V	B/W	8	2	7
CT2232	UA	VIDEO	3	10	6.5	20V	B/W	8	2	7
CT2232	UA	VIDEO	3	10	6.5	20V	B/W	8	2	7
H4103	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
H4104	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
H8362	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
H8397	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
H8398	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
H8399	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
H9311	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
H9324	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
H9366	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
H9369	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
H9379	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
H9379A	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
H9386	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
P841	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P842	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P843	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P844	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P846	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P847	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P8000	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
P8001	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
P8003	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
P8005	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
P8021	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P8023	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P8038	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
P8130	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
P8132	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
P8160	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
P8400	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
P8401	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
S4097	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
TV8000	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ1020	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
XQ1021	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
XQ1023	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
XQ1024	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
XQ1025	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
XQ1026	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
XQ1070	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ1073	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ1075	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ1120	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ1121	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ1240	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ1410	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
XQ1413	UA	VIDEO	1	4	6.3	36V	B/W	5	6	7
XQ1415	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ1427	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
XQ2070	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ2073	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ2075	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ2173	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ2175	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ2177	UA	VIDEO	1	8	6.3	36V	B/W	7	2	5
XQ2427	6	VIDEO	3	4	6.3	36V	B/W	1	5	6
XQ3427	6	VIDEO	3	4	6.3	36V	B/W	1	5	6

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
Scope Tubes										
3ATP1	4	SCOPE	3	8	6.3	68V	B/W	6	4	1
3AUP1	4	SCOPE	5	7	2.68	68V	B/W	6	1	3
3BSP1	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
3BSP2	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
3BSP7	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
3BSP11	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
3RP1A	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
5BMP1	UA	SCOPE	1	14	6.3	68V	B/W	2	3	5
5BMP2	UA	SCOPE	1	14	6.3	68V	B/W	2	3	5
5BMP15	UA	SCOPE	1	14	6.3	68V	B/W	2	3	5
5DEP1	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
5M192P	UA	SCOPE	2	8	12.6	68V	B/W	5	4	3
5UP1	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
10ANP4	UA	SCOPE	2	8	6.3	68V	B/W	5	4	3
12VCHP7	UA	SCOPE	2	8	6.3	52V	B/W	5	4	3
23M31P	UA	SCOPE	1	12	6.3	68V	B/W	11	2	10
23M95P	UA	SCOPE	1	12	6.3	68V	B/W	11	2	10
23M101P	UA	SCOPE	1	12	6.3	68V	B/W	11	2	10
75AKB1	2	SCOPE	1	14	6.3	68V	B/W	3	2	7
85DB1	2	SCOPE	1	14	6.3	68V	B/W	3	2	7
95WB31	2	SCOPE	1	14	6.3	52V	B/W	2	3	6
95XB31	2	SCOPE	1	14	6.3	68V	B/W	2	3	11
130ARB1	UA	SCOPE	1	12	6.3	68V	B/W	3	2	8
140BHB31	UA	SCOPE	1	14	6.3	68V	B/W	7	3	9
140CGB31	2	SCOPE	1	14	6.3	68V	B/W	2	3	12
150DRB31	UA	SCOPE	1	14	6.3	68V	B/W	3	2	5
150DSB31	2	SCOPE	1	14	6.3	68V	B/W	2	3	11
150DTB31	2	SCOPE	1	14	6.3	36V	B/W	2	3	11
150DUB31	UA	SCOPE	1	14	6.0	52V	B/W	7	2	5
150DVB31	2	SCOPE	1	14	6.0	68V	B/W	2	3	12
150DWB31	2	SCOPE	1	14	6.3	68V	B/W	2	3	12
150DXB31	2	SCOPE	1	14	6.3	68V	B/W	2	3	12
150DYB31	2	SCOPE	1	14	6.3	68V	B/W	2	3	12
150ECB39	2	SCOPE	1	14	6.0	68V	B/W	2	3	12
150EDB31	2	SCOPE	1	14	6.3	68V	B/W	2	3	11
150EFB31	2	SCOPE	1	14	6.3	68V	B/W	2	3	11
170XB31	UA	SCOPE	1	14	6.0	68V	B/W	7	2	5
180BXB31	UA	SCOPE	1	14	6.3	68V	B/W	2	3	5
180BZB22	2	SCOPE	1	14	6.3	68V	B/W	2	3	12
180CAB39	2	SCOPE	1	14	6.3	68V	B/W	2	3	12
180CDB39	2	SCOPE	1	14	6.3	68V	B/W	2	3	12
55261	UA	SCOPE	1	14	6.3	52V	B/W	7	3	9
A10V1	UA	SCOPE	1	14	6.3	68V	B/W	7	3	9
C327P1	2	SCOPE	1	14	6.3	68V	B/W	3	2	7
D7-221GH	UA	SCOPE	1	14	6.3	68V	B/W	2	3	5
D14-121	UA	SCOPE	1	14	6.3	52V	B/W	7	3	9
D14-123	UA	SCOPE	1	14	6.3	52V	B/W	7	3	9
D14-162GH	UA	SCOPE	1	14	6.3	68V	B/W	7	3	9
D14-251GH	UA	SCOPE	1	14	6.3	68V	B/W	7	3	9
D14-370GH	2	SCOPE	1	14	6.3	68V	B/W	2	3	12
H9155PB1	UA	SCOPE	1	2	6.3	68V	B/W	3	4	14
M49JCZ0WW	UA	SCOPE	1	14	6.3	52V	B/W	5	3	13
M1409P1	UA	SCOPE	1	14	6.3	68V	B/W	5	3	13

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
Projection Tubes										
6ABP1	3	VIDEO	7	9	6.3	36V	B/W	12	10	4
6ABP55	3	VIDEO	7	9	6.3	36V	B/W	12	10	4
6ABP56	3	VIDEO	7	9	6.3	36V	B/W	12	10	4
6ST6191P22	2	PROJ	1	14	6.3	52V	B/W	13	12	11
7ST6611P22	UA	PROJ	6	7	6.3	52V	B/W	8	5	10
25XP4	2	PROJ	1	14	6.3	68V	B/W	6	7	5
95L652-31	3	PROJ	6	7	6.3	52V	B/W	8	11	10
95L652-41	3	PROJ	6	7	6.3	52V	B/W	8	11	10
95L652-51	3	PROJ	6	7	6.3	52V	B/W	8	11	10
150AUB22	2	VIDEO	1	14	6.3	36V	B/W	6	7	5
170JB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
170KB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
170VB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
170WB22	3	PROJ	6	7	6.3	68V	B/W	8	11	10
180ACB22	3	PROJ	6	7	6.3	52V	B/W	8	5	10
180ADB22	UA	PROJ	6	7	6.3	52V	B/W	8	5	10
180AKB22	3	PROJ	6	7	6.3	52V	B/W	8	5	10
180AMB22	3	PROJ	6	7	6.3	52V	B/W	8	5	10
180ATB22	UA	PROJ	6	7	6.3	52V	B/W	8	5	10
180AXB22	3	PROJ	6	7	6.3	52V	B/W	8	5	10
180BRB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
180BSB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
180BTB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
180BWB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
180BYB22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
180CGB22	3	PROJ	6	7	6.3	68V	B/W	8	11	10
180CHB22	3	PROJ	6	7	6.3	68V	B/W	8	11	10
180CJB22	3	PROJ	6	7	6.3	68V	B/W	8	11	10
180CKB22	3	PROJ	6	7	6.3	68V	B/W	8	11	10
180CLB22	3	PROJ	6	7	6.3	68V	B/W	8	11	10
180RB22	3	PROJ	6	7	6.3	52V	B/W	8	5	10
180TB22	2	PROJ	1	14	6.3	52V	B/W	6	3	5
180WB22	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
180YB22	2	PROJ	1	14	6.3	52V	B/W	13	12	11
180YB43	3	PROJ	6	7	6.3	52V	B/W	8	11	10
320DTB22	3	PROJ	6	7	6.3	52V	B/W	8	5	10
330P09002	3	VIDEO	5	6	6.3	36V	B/W	11	3	10
330P09004	3	VIDEO	5	6	6.3	36V	B/W	11	3	10
330P09006	3	VIDEO	5	6	6.3	36V	B/W	11	3	10
330P09007	3	VIDEO	5	6	6.3	36V	B/W	11	3	10
A13ABQ0BM	3	VIDEO	7	9	6.3	20V	B/W	12	10	4
A13ABQ0GJ	3	VIDEO	7	9	6.3	20V	B/W	12	10	4
A13ABQ0RF	3	VIDEO	7	9	6.3	20V	B/W	12	10	4
A13ABR0BM	3	VIDEO	7	9	6.3	20V	B/W	12	10	4
A13ABR0RF	3	VIDEO	7	9	6.3	20V	B/W	12	10	4
C5M36P22	UA	PROJ	6	7	6.3	68V	B/W	8	5	10
C5M64P22	2	PROJ	1	14	6.3	52V	B/W	13	12	11
C5M102P22	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
C5M109P22	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
C5M120P22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
C5M146P22	3	VIDEO	6	7	6.3	36V	B/W	8	5	10
C5M1022P22	2	PROJ	1	14	6.3	52V	B/W	13	12	11
C6M34P22	3	PROJ	6	7	6.3	68V	B/W	8	4	10
C6M36P22	3	PROJ	6	7	6.3	68V	B/W	8	4	10
C6M39P22	3	PROJ	6	7	6.3	68V	B/W	8	5	10
C7M24P22	4	VIDEO	1	8	6.3	36V	B/W	7	2	3
C7M108P22	3	PROJ	6	7	6.3	68V	B/W	8	11	10
C7M130P22	3	PROJ	6	7	6.3	68V	B/W	8	11	10

CRT NUMBER	SKT	CRT TYPE	F1	F2	FIL	NEG BIAS	GUN	K	G1	G2
CE391	2	PROJ	1	14	6.3	36V	B/W	13	5	11
CE524	2	PROJ	1	14	6.3	36V	B/W	13	5	11
CE528	2	PROJ	1	14	6.3	52V	B/W	13	12	11
CE551	2	PROJ	1	14	12.6	36V	B/W	13	5	11
CE713	2	PROJ	1	14	6.3	52V	B/W	13	12	11
CE767	2	PROJ	1	14	6.3	36V	B/W	13	5	11
CE781	2	PROJ	1	14	6.3	68V	B/W	13	12	11
CE782	2	PROJ	1	14	6.3	52V	B/W	13	5	11
CE818	2	PROJ	1	14	6.3	36V	B/W	13	5	11
CE821	2	PROJ	1	14	6.3	36V	B/W	13	5	11
CE822	2	PROJ	1	14	6.3	68V	B/W	13	5	11
CE824	2	PROJ	1	14	6.3	52V	B/W	13	5	11
CE844	2	PROJ	1	14	6.3	68V	B/W	13	5	11
CE885	2	PROJ	1	14	6.3	36V	B/W	13	5	11
CE892	2	PROJ	1	14	6.3	36V	B/W	13	5	11
CE917	2	PROJ	1	14	6.3	36V	B/W	13	5	11
CE954	2	PROJ	1	14	6.3	36V	B/W	13	5	11
E8406	2	PROJ	1	14	6.3	52V	B/W	13	12	11
E8409	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
E8411	2	PROJ	1	14	6.3	52V	B/W	13	12	11
E8414	2	PROJ	1	14	6.3	52V	B/W	13	12	11
EP96X16	2	PROJ	1	14	6.3	52V	B/W	13	12	11
EP96X17	2	PROJ	1	14	6.3	52V	B/W	13	12	11
EP96X18	2	PROJ	1	14	6.3	52V	B/W	13	12	11
EP96X19	2	PROJ	1	14	6.3	52V	B/W	13	12	11
EP96X20	2	PROJ	1	14	6.3	52V	B/W	13	12	11
EP96X21	2	PROJ	1	14	6.3	52V	B/W	13	12	11
EP96X24	3	PROJ	6	7	6.3	52V	B/W	8	11	10
EP96X25	3	PROJ	6	7	6.3	52V	B/W	8	11	10
EP96X26	3	PROJ	6	7	6.3	52V	B/W	8	11	10
EP96X30	3	PROJ	6	7	6.3	52V	B/W	8	11	10
EP96X31	3	PROJ	6	7	6.3	52V	B/W	8	11	10
EP96X32	3	PROJ	6	7	6.3	52V	B/W	8	11	10
EW96X12	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
EW96X13	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
EW96X14	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
EWX8	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
EWX9	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
EWX10	UA	PROJ	6	7	6.3	52V	B/W	8	4	10
SD102	UA	PROJ	5	6	6.3	52V	B/W	9	3	4
SD116	UA	PROJ	5	6	6.3	68V	B/W	9	3	4
SD130	UA	PROJ	6	7	6.3	68V	B/W	10	4	5
SD142	UA	PROJ	5	6	6.3	68V	B/W	9	3	4
SD174	UA	PROJ	6	7	6.3	52V	B/W	10	4	5
SD186	UA	PROJ	6	7	6.3	68V	B/W	10	4	5
SD208	UA	PROJ	6	7	6.3	68V	B/W	10	4	5
VT0625B22	2	PROJ	1	14	6.3	52V	B/W	6	7	5
VT0629B22	3	PROJ	5	6	6.3	52V	B/W	11	3	10
VT0700B22	2	PROJ	1	14	12.0	52V	B/W	6	7	5
VT0705B22	2	PROJ	1	14	6.3	52V	B/W	6	7	5
VT0720B22	2	PROJ	1	14	6.3	52V	B/W	6	7	5
VT0725B22	2	PROJ	1	14	6.3	52V	B/W	6	7	5
VT0729B22	3	PROJ	5	6	6.3	52V	B/W	11	3	10
VT01729B22	3	PROJ	5	6	6.3	52V	B/W	11	3	10
VT1725B22	2	PROJ	1	14	6.3	52V	B/W	6	7	5
VT1729B22	3	PROJ	5	6	6.3	52V	B/W	11	3	10
VT2729B22	3	PROJ	5	6	6.3	52V	B/W	11	3	10
VT4729B22	3	PROJ	5	6	6.3	52V	B/W	11	3	10

SENCORE

3200 Sencore Drive, Sioux Falls, South Dakota 57107
Telephone: (605) 339-0100
1-800-SENCORE (736-2673)